8-bit parallel-in/serial out shift register Rev. 2 — 21 August 2017

Product data sheet

#### **1** General description

The 74HC165-Q100; 74HCT165-Q100 are 8-bit serial or parallel-in/serial-out shift registers. The device features a serial data input (DS), eight parallel data inputs (D0 to D7) and two complementary serial outputs (Q7 and  $\overline{Q7}$ ). When the parallel load input ( $\overline{PL}$ ) is LOW the data from D0 to D7 is loaded into the shift register asynchronously. When  $\overline{PL}$  is HIGH data enters the register serially at DS. When the clock enable input ( $\overline{CE}$ ) is LOW data is shifted on the LOW-to-HIGH transitions of the CP input. A HIGH on  $\overline{CE}$  will disable the CP input. Inputs are overvoltage tolerant to 15 V. This enables the device to be used in HIGH-to-LOW level shifting applications.

This product has been qualified to the Automotive Electronics Council (AEC) standard Q100 (Grade 1) and is suitable for use in automotive applications.

#### 2 Features and benefits

- Automotive product qualification in accordance with AEC-Q100 (Grade 1)
   Specified from -40 °C to +85 °C and from -40 °C to +125 °C
- Asynchronous 8-bit parallel load
- Synchronous serial input
- Complies with JEDEC standard no. 7A
- Input levels:
  - For 74HC165-Q100: CMOS level
  - For 74HCT165-Q100: TTL level
- ESD protection:
  - MIL-STD-883, method 3015 exceeds 2000 V
  - HBM JESD22-A114F exceeds 2000 V
  - MM JESD22-A115-A exceeds 200 V (C = 200 pF, R = 0  $\Omega$ )

#### 3 Applications


Parallel-to-serial data conversion

# ne<mark>x</mark>peria

## 4 Ordering information

Table 1. Ordering information									
Type number	Package								
	Temperature range	Name	Description	Version					
74HC165D-Q100	-40 °C to +125 °C	SO16	plastic small outline package; 16 leads;	SOT109-1					
74HCT165D-Q100			body width 3.9 mm						
74HC165PW-Q100	-40 °C to +125 °C	TSSOP16	plastic thin shrink small outline package; 16 leads;	SOT403-1					
74HCT165PW-Q100			body width 4.4 mm						
74HC165BQ-Q100	-40 °C to +125 °C	DHVQFN16	plastic dual in-line compatible thermal enhanced	SOT763-1					
74HCT165BQ-Q100			very thin quad flat package; no leads; 16 terminals; body 2.5 × 3.5 × 0.85 mm						


## 5 Functional diagram

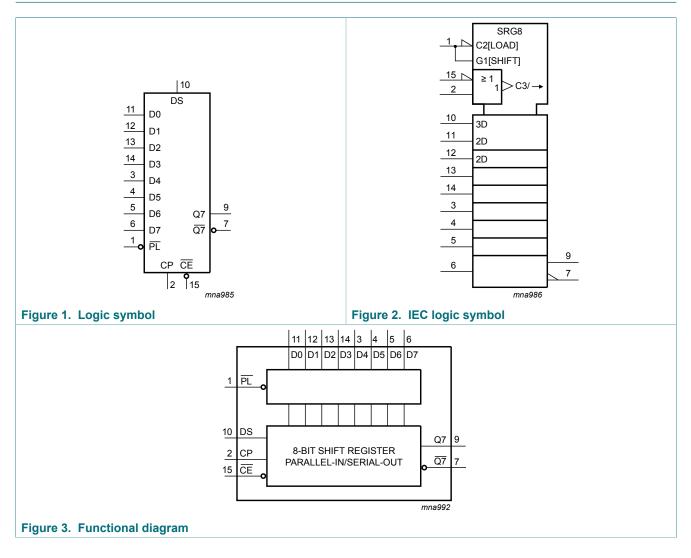

8-bit parallel-in/serial out shift register

## 6 Pinning information

#### 6.1 Pinning

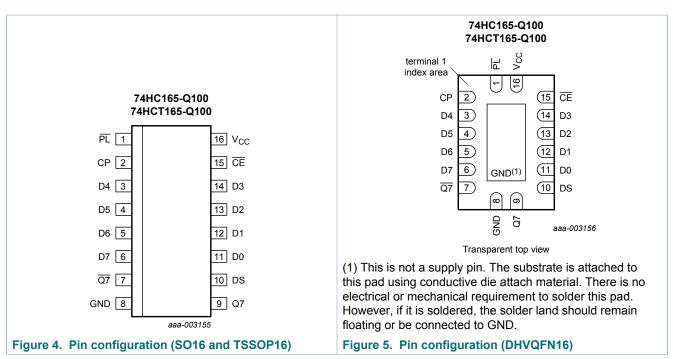

#### 6.2 Pin description

Table 2. Pin de	escription	
Symbol	Pin	Description
PL	1	asynchronous parallel load input (active LOW)
СР	2	clock input (LOW-to-HIGH edge-triggered)
Q7	7	complementary output from the last stage
GND	8	ground (0 V)
Q7	9	serial output from the last stage
DS	10	serial data input
D0 to D7	11, 12, 13, 14, 3, 4, 5, 6	parallel data inputs (also referred to as Dn)
CE	15	clock enable input (active LOW)
V <sub>CC</sub>	16	positive supply voltage

8-bit parallel-in/serial out shift register

## 7 Functional description

Table 3. Function ta	ble <sup>[1]</sup>								
Operating modes	Inputs					Qn reg	gisters	Outputs	
	PL	CE	СР	DS	D0 to D7	Q0	Q1 to Q6	Q7	<b>Q7</b>
parallel load	L	Х	Х	Х	L	L	L to L	L	Н
	L	Х	Х	Х	Н	Н	H to H	Н	L
serial shift	Н	L	1	I	Х	L	q0 to q5	q6	<u>q6</u>
	Н	L	1	h	Х	Н	q0 to q5	q6	<u>q6</u>
	Н	1	L	I	Х	L	q0 to q5	q6	<u>q6</u>
	Н	1	L	h	Х	Н	q0 to q5	q6	<u>q6</u>
hold "do nothing"	Н	Н	Х	Х	Х	q0	q1 to q6	q7	<del>q7</del>
	Н	Х	Н	Х	Х	q0	q1 to q6	q7	<del>q7</del>

#### [1] H = HIGH voltage level;

h = HIGH voltage level one set-up time prior to the LOW-to-HIGH clock transition;


L = LOW voltage level;

I = LOW voltage level one set-up time prior to the LOW-to-HIGH clock transition;

q = state of the referenced output one set-up time prior to the LOW-to-HIGH clock transition;

X = don't care;

 $\uparrow$  = LOW-to-HIGH clock transition.

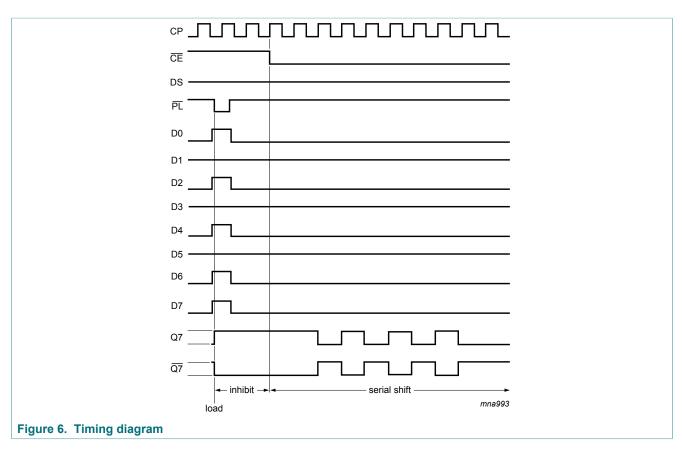

74HC\_HCT165\_Q100
Product data sheet

© Nexperia B.V. 2017. All rights reserved.

## 8 Limiting values

#### Table 4. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to GND (ground = 0 V)

Symbol	Parameter	Conditions		Min	Max	Unit
V <sub>CC</sub>	supply voltage			-0.5	+7	V
I <sub>IK</sub>	input clamping current	$V_{\rm I}$ < -0.5 V or $V_{\rm I}$ > $V_{\rm CC}$ + 0.5 V	[1]	-	±20	mA
I <sub>ОК</sub>	output clamping current	$V_{\rm O}$ < -0.5 V or $V_{\rm O}$ > $V_{\rm CC}$ + 0.5 V	[1]	-	±20	mA
lo	output current	$-0.5 V < V_O < V_{CC} + 0.5 V$		-	±25	mA
I <sub>CC</sub>	supply current			-	50	mA
I <sub>GND</sub>	ground current			-50	-	mA
T <sub>stg</sub>	storage temperature			-65	+150	°C
P <sub>tot</sub>	total power dissipation	T <sub>amb</sub> = -40 °C to +125 °C	[2]	-	500	mW

[1] The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

[2] For SO16 Packages: P<sub>tot</sub> derates linearly with 8 mW/K above 70 °C.

For TSSOP16 Packages:  $P_{tot}$  derates linearly with 5.5 mW/K above 60 °C. For DHVQFN16 Packages:  $P_{tot}$  derates linearly with 4.5 mW/K above 60 °C.

## 9 Recommended operating conditions

#### Table 5. Recommended operating conditions

Voltages are referenced to GND (ground = 0 V)

Symbol	Parameter	Conditions	74H	IC165-Q	100	74H	Unit		
			Min	Тур	Мах	Min	Тур	Max	
V <sub>CC</sub>	supply voltage		2.0	5.0	6.0	4.5	5.0	5.5	V
VI	input voltage		0	-	V <sub>CC</sub>	0	-	V <sub>CC</sub>	V
Vo	output voltage		0	-	V <sub>CC</sub>	0	-	V <sub>CC</sub>	V
T <sub>amb</sub>	ambient temperature		-40	-	+125	-40	-	+125	°C
Δt/ΔV	input transition rise and fall rate	V <sub>CC</sub> = 2.0 V	-	-	625	-	-	-	ns/V
		V <sub>CC</sub> = 4.5 V	-	1.67	139	-	1.67	139	ns/V
		V <sub>CC</sub> = 6.0 V	-	-	83	-	-	-	ns/V

## **10 Static characteristics**

#### Table 6. Static characteristics

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions		25 °C		-	°C to 5 °C	-40 °C to +125 °C		Unit
			Min	Тур	Max	Min	Max	Min	Max	
74HC165	-Q100						,		,	
V <sub>IH</sub>	HIGH-level input	V <sub>CC</sub> = 2.0 V	1.5	1.2	-	1.5	-	1.5	-	V
	voltage	V <sub>CC</sub> = 4.5 V	3.15	2.4	-	3.15	-	3.15	-	V
		V <sub>CC</sub> = 6.0 V	4.2	3.2	-	4.2	-	4.2	-	V
VIL	LOW-level input	V <sub>CC</sub> = 2.0 V	-	0.8	0.5	-	0.5	-	0.5	V
	voltage	V <sub>CC</sub> = 4.5 V	-	2.1	1.35	-	1.35	-	1.35	V
		V <sub>CC</sub> = 6.0 V	-	2.8	1.8	-	1.8	-	1.8	V
V <sub>OH</sub>	HIGH-level	$V_{I} = V_{IH} \text{ or } V_{IL}$								
	output voltage	I <sub>O</sub> = -20 μA; V <sub>CC</sub> = 2.0 V	1.9	2.0	-	1.9	-	1.9	-	V
		I <sub>O</sub> = -20 μA; V <sub>CC</sub> = 4.5 V	4.4	4.5	-	4.4	-	4.4	-	V
		I <sub>O</sub> = -20 μA; V <sub>CC</sub> = 6.0 V	5.9	6.0	-	5.9	-	5.9	-	V
		I <sub>O</sub> = -4.0 mA; V <sub>CC</sub> = 4.5 V	3.98	4.32	-	3.84	-	3.7	-	V
		I <sub>O</sub> = -5.2 mA; V <sub>CC</sub> = 6.0 V	5.48	5.81	-	5.34	-	5.2	-	V
V <sub>OL</sub>	LOW-level	V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub>								
	output voltage	I <sub>O</sub> = 20 μA; V <sub>CC</sub> = 2.0 V	-	0	0.1	-	0.1	-	0.1	V
		I <sub>O</sub> = 20 μA; V <sub>CC</sub> = 4.5 V	-	0	0.1	-	0.1	-	0.1	V
		I <sub>O</sub> = 20 μA; V <sub>CC</sub> = 6.0 V	-	0	0.1	-	0.1	-	0.1	V
		I <sub>O</sub> = 4.0 mA; V <sub>CC</sub> = 4.5 V	-	0.15	0.26	-	0.33	-	0.4	V
		I <sub>O</sub> = 5.2 mA; V <sub>CC</sub> = 6.0 V	-	0.16	0.26	-	0.33	-	0.4	V
l <sub>l</sub>	input leakage current	$V_{I} = V_{CC}$ or GND; $V_{CC} = 6.0 V$	-	-	±0.1	-	±1	-	±1	μA
I <sub>CC</sub>	supply current	$V_I = V_{CC}$ or GND; $I_O = 0$ A; $V_{CC} = 6.0$ V	-	-	8.0	-	80	-	160	μA
CI	input capacitance		-	3.5	-	-	-	-	-	pF

#### 8-bit parallel-in/serial out shift register

Symbol	Parameter	Conditions		25 °C			°C to 5 °C	-40 °C to +125 °C		Unit
			Min	Тур	Max	Min	Max	Min	Max	
74HCT16	5-Q100						,			
V <sub>IH</sub>	HIGH-level input voltage	$V_{CC}$ = 4.5 V to 5.5 V	2.0	1.6	-	2.0	-	2.0	-	V
V <sub>IL</sub>	LOW-level input voltage	V <sub>CC</sub> = 4.5 V to 5.5 V	-	1.2	0.8	-	0.8	-	0.8	V
V <sub>OH</sub>	HIGH-level	$V_{I}$ = $V_{IH}$ or $V_{IL}$ ; $V_{CC}$ = 4.5 V								
	output voltage	I <sub>O</sub> = -20 μA	4.4	4.5	-	4.4	-	4.4	-	V
		I <sub>O</sub> = -4.0 mA	3.98	4.32	-	3.84	-	3.7	-	V
OL	LOW-level	V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub>								
	output voltage	I <sub>O</sub> = 20 μA; V <sub>CC</sub> = 4.5 V	-	0	0.1	-	0.1	-	0.1	V
		I <sub>O</sub> = 5.2 mA; V <sub>CC</sub> = 6.0 V	-	0.16	0.26	-	0.33	-	0.4	V
I <sub>I</sub>	input leakage current	$V_{I} = V_{CC}$ or GND; $V_{CC} = 6.0 V$	-	-	±0.1	-	±1	-	±1	μA
I <sub>CC</sub>	supply current	$V_I = V_{CC}$ or GND; $I_O = 0$ A; $V_{CC} = 6.0$ V	-	-	8.0	-	80	-	160	μA
ΔI <sub>CC</sub>	additional supply current	per input pin; V <sub>I</sub> = V <sub>CC</sub> - 2.1 V; other inputs at V <sub>CC</sub> or GND; V <sub>CC</sub> = 4.5 V to 5.5 V								
		Dn and DS inputs	-	35	126	-	157.5	-	171.5	μA
		CP $\overline{CE}$ , and $\overline{PL}$ inputs	-	65	234	-	292.5	-	318.5	μA
CI	input capacitance		-	3.5	-	-	-	-	-	pF

## **11 Dynamic characteristics**

#### Table 7. Dynamic characteristics

At recommended operating conditions; voltages are referenced to GND (ground = 0 V);  $C_L = 50 \text{ pF}$  unless otherwise specified; for test circuit, see Figure 12

Symbol	Parameter	Conditions		25 °C			°C to 5 °C		°C to 5 °C	Unit
			Min	Тур	Мах	Min	Max	Min	Мах	
74HC165	-Q100									
t <sub>pd</sub>	propagation delay	CP or $\overline{CE}$ to Q7, $\overline{Q7}$ ; <sup>[1]</sup> see <u>Figure 7</u>								
		V <sub>CC</sub> = 2.0 V	-	52	165	-	205	-	250	ns
		V <sub>CC</sub> = 4.5 V	-	19	33	-	41	-	50	ns
		V <sub>CC</sub> = 6.0 V	-	15	28	-	35	-	43	ns
		V <sub>CC</sub> = 5.0 V; C <sub>L</sub> = 15 pF	-	16	-	-	-	-	-	ns
	PL to Q7, Q7; see Figure 8									
		V <sub>CC</sub> = 2.0 V	-	50	165	-	205	-	250	ns
		V <sub>CC</sub> = 4.5 V	-	18	33	-	41	-	50	ns
		V <sub>CC</sub> = 6.0 V	-	14	28	-	35	-	43	ns
		V <sub>CC</sub> = 5.0 V; C <sub>L</sub> = 15 pF	-	15	-	-	-	-	-	ns
		D7 to Q7, Q7; see Figure 9								
		V <sub>CC</sub> = 2.0 V	-	36	120	-	150	-	180	ns
		V <sub>CC</sub> = 4.5 V	-	13	24	-	30	-	36	ns
		V <sub>CC</sub> = 6.0 V	-	10	20	-	26	-	31	ns
		V <sub>CC</sub> = 5.0 V; C <sub>L</sub> = 15 pF	-	11	-	-	-	-	-	ns
t <sub>t</sub>	transition time	Q7, $\overline{\text{Q7}}$ output; see <u>Figure 7</u> <sup>[2]</sup>								
		V <sub>CC</sub> = 2.0 V	-	19	75	-	95	-	110	ns
		V <sub>CC</sub> = 4.5 V	-	7	15	-	19	-	22	ns
		V <sub>CC</sub> = 6.0 V	-	6	13	-	16	-	19	ns
t <sub>W</sub>	pulse width	CP input HIGH or LOW; see Figure 7								
		V <sub>CC</sub> = 2.0 V	80	17	-	100	-	120	-	ns
		V <sub>CC</sub> = 4.5 V	16	6	-	20	-	24	-	ns
		V <sub>CC</sub> = 6.0 V	14	5	-	17	-	20	-	ns
		PL input LOW; see Figure 8								
		V <sub>CC</sub> = 2.0 V	80	14	-	100	-	120	-	ns
		V <sub>CC</sub> = 4.5 V	16	5	-	20	-	24	-	ns
		V <sub>CC</sub> = 6.0 V	14	4	-	17	-	20	-	ns

## Nexperia

## 74HC165-Q100; 74HCT165-Q100

8-bit parallel-in/serial out shift register

Symbol	Parameter	Conditions		25 °C			°C to 5 °C	-40 °C to +125 °C		Unit
			Min	Тур	Max	Min	Max	Min	Max	
t <sub>rec</sub>	recovery time	PL to CP, CE; see Figure 8								
		V <sub>CC</sub> = 2.0 V	100	22	-	125	-	150	-	ns
		V <sub>CC</sub> = 4.5 V	20	8	-	25	-	30	-	ns
		V <sub>CC</sub> = 6.0 V	17	6	-	21	-	26	-	ns
t <sub>su</sub>	set-up time	DS to CP, CE; see Figure 10								
		V <sub>CC</sub> = 2.0 V	80	11	-	100	-	120	-	ns
		V <sub>CC</sub> = 4.5 V	16	4	-	20	-	24	-	ns
		V <sub>CC</sub> = 6.0 V	14	3	-	17	-	20	-	ns
		CE to CP and CP to CE; see <u>Figure 10</u>								
		V <sub>CC</sub> = 2.0 V	80	17	-	100	-	120	-	ns
		V <sub>CC</sub> = 4.5 V	16	6	-	20	-	24	-	ns
		V <sub>CC</sub> = 6.0 V	14	5	-	17	-	20	-	ns
		Dn to PL; see Figure 11								
		V <sub>CC</sub> = 2.0 V	80	22	-	100	-	120	-	ns
		V <sub>CC</sub> = 4.5 V	16	8	-	20	-	24	-	ns
		V <sub>CC</sub> = 6.0 V	14	6	-	17	-	20	-	ns
t <sub>h</sub>	hold time	DS to CP, CE and Dn to PL; see <u>Figure 10</u>								
		V <sub>CC</sub> = 2.0 V	5	2	-	5	-	5	-	ns
		V <sub>CC</sub> = 4.5 V	5	2	-	5	-	5	-	ns
		V <sub>CC</sub> = 6.0 V	5	2	-	5	-	5	-	ns
		CE to CP and CP to CE; see <u>Figure 10</u>								
		V <sub>CC</sub> = 2.0 V	5	-17	-	5	-	5	-	ns
		V <sub>CC</sub> = 4.5 V	5	-6	-	5	-	5	-	ns
		V <sub>CC</sub> = 6.0 V	5	-5	-	5	-	5	-	ns
f <sub>max</sub>	maximum	CP input; see Figure 7								
	frequency	V <sub>CC</sub> = 2.0 V	6	17	-	5	-	4	-	MHz
		V <sub>CC</sub> = 4.5 V	30	51	-	24	-	20	-	MHz
		V <sub>CC</sub> = 6.0 V	35	61	-	28	-	24	-	MHz
		V <sub>CC</sub> = 5.0 V; C <sub>L</sub> = 15 pF	-	56	-	-	-	-	-	MHz
C <sub>PD</sub>	power dissipation capacitance	per package; $V_I$ = GND to $V_{CC}$ <sup>[3]</sup>	-	35	-	-	-	-	-	pF

#### 8-bit parallel-in/serial out shift register

Symbol	Parameter	Conditions		25 °C			°C to 5 °C	-40 °C to +125 °C		Unit
			Min	Тур	Max	Min	Max	Min	Max	
74HCT16	5-Q100									
t <sub>pd</sub>	propagation delay	CE, CP to Q7, Q7;         [1]           see Figure 7         [1]								
		V <sub>CC</sub> = 4.5 V	-	17	34	-	43	-	51	ns
		V <sub>CC</sub> = 5.0 V; C <sub>L</sub> = 15 pF	-	14	-	-	-	-	-	ns
		PL to Q7, Q7; see Figure 8								
		V <sub>CC</sub> = 4.5 V	-	20	40	-	50	-	60	ns
		V <sub>CC</sub> = 5.0 V; C <sub>L</sub> = 15 pF	-	17	-	-	-	-	-	ns
		D7 to Q7, $\overline{Q7}$ ; see <u>Figure 9</u>								
		V <sub>CC</sub> = 4.5 V	-	14	28	-	35	-	42	ns
		V <sub>CC</sub> = 5.0 V; C <sub>L</sub> = 15 pF	-	11	-	-	-	-	-	ns
t <sub>t</sub>	transition time	Q7, $\overline{Q7}$ output; see Figure 7 <sup>[2]</sup>			_					
		V <sub>CC</sub> = 4.5 V	-	7	15	-	19	-	22	ns
t <sub>W</sub>	pulse width	CP input; see <u>Figure 7</u>								
		V <sub>CC</sub> = 4.5 V	16	6	-	20	-	24	-	ns
		PL input; see Figure 8								
		V <sub>CC</sub> = 4.5 V	20	9	-	25	-	30	-	ns
t <sub>rec</sub>	recovery time	PL to CP, CE; see Figure 8								
		V <sub>CC</sub> = 4.5 V	20	8	-	25	-	30	-	ns
t <sub>su</sub>	set-up time	DS to CP, CE; see Figure 10			_					
		V <sub>CC</sub> = 4.5 V	20	2	-	25	-	30	-	ns
		CE to CP and CP to CE; see Figure 10								
		V <sub>CC</sub> = 4.5 V	20	7	-	25	-	30	-	ns
		Dn to PL; see <u>Figure 11</u>								
		V <sub>CC</sub> = 4.5 V	20	10	-	25	-	30	-	ns
t <sub>h</sub>	hold time	DS to CP, CE and Dn to PL; see <u>Figure 10</u>								
		V <sub>CC</sub> = 4.5 V	7	-1	-	9	-	11	-	ns
		CE to CP and CP to CE; see Figure 10								
		V <sub>CC</sub> = 4.5 V	0	-7	-	0	-	0	_	ns

#### **Nexperia**

## 74HC165-Q100; 74HCT165-Q100

8-bit parallel-in/serial out shift register

Symbol Parameter		Conditions	25 °C			-40 °C to +85 °C		-40 °C to +125 °C		Unit
			Min	Тур	Max	Min	Max	Min	Мах	
IIIdA	maximum	CP input; see Figure 7								
	frequency	V <sub>CC</sub> = 4.5 V	26	44	-	21	-	17	-	MHz
		V <sub>CC</sub> = 5.0 V; C <sub>L</sub> = 15 pF	-	48	-	-	-	-	-	MHz
C <sub>PD</sub>	power dissipation capacitance	per package; [3] $V_{I}$ = GND to $V_{CC}$ - 1.5 V	-	35	-	-	-	-	-	pF

[1]

[2]

 $\begin{array}{l} t_{pd} \text{ is the same as } t_{PHL} \text{ and } t_{PLH.} \\ t_t \text{ is the same as } t_{THL} \text{ and } t_{TLH.} \\ C_{PD} \text{ is used to determine the dynamic power dissipation } (P_D \text{ in } \mu\text{W}). \\ P_D = C_{PD} \times V_{CC}^2 \times f_i + \Sigma (C_L \times V_{CC}^2 \times f_o) \text{ where:} \\ f = i \text{ is not for some signal but of } M_{CD} \\ \end{array}$ [3]

 $f_i$  = input frequency in MHz;


 $f_0$  = output frequency in MHz;

 $\Sigma$  (C<sub>L</sub> × V<sub>CC</sub><sup>2</sup> × f<sub>o</sub>) = sum of outputs;

 $C_{L}$  = output load capacitance in pF;

 $V_{CC}$  = supply voltage in V.

#### 11.1 Waveforms and test circuit

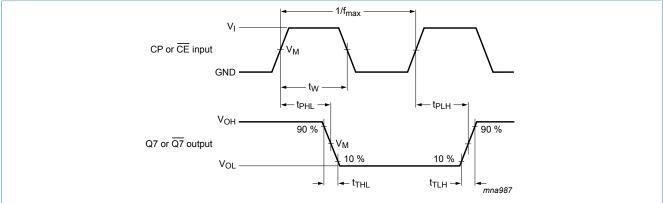

Measurement points are given in Table 8.


 $V_{\text{OL}}$  and  $V_{\text{OH}}$  are typical voltage output levels that occur with the output load.

Figure 7. The clock (CP) or clock enable ( $\overline{CE}$ ) to output (Q7 or  $\overline{Q7}$ ) propagation delays, the clock pulse width, the maximum clock frequency and the output transition times


#### Nexperia

## 74HC165-Q100; 74HCT165-Q100

8-bit parallel-in/serial out shift register

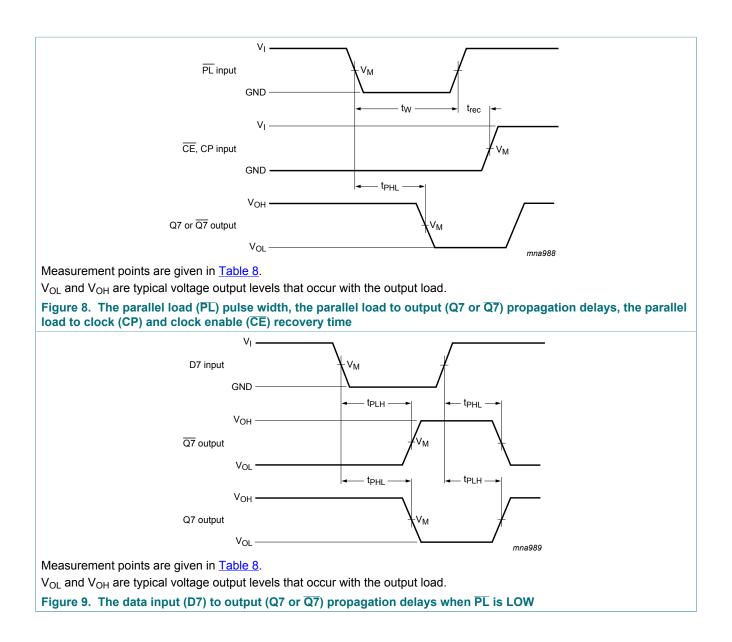

8-bit parallel-in/serial out shift register

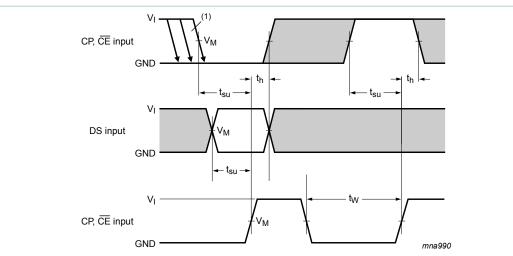


(1)  $\overline{\text{CE}}$  may change only from HIGH-to-LOW while CP is LOW.

The shaded areas indicate when the input is permitted to change for predictable output performance Measurement points are given in <u>Table 8</u>.

 $V_{\text{OL}}$  and  $V_{\text{OH}}$  are typical voltage output levels that occur with the output load.

Figure 10. The set-up and hold times from the serial data input (DS) to the clock (CP) and clock enable ( $\overline{CE}$ ) inputs, from the clock enable input ( $\overline{CE}$ ) to the clock input (CP) and from the clock input (CP) to the clock enable input ( $\overline{CE}$ )

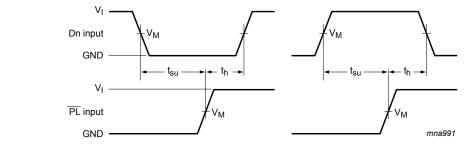

Measurement points are given in <u>Table 8</u>.

 $V_{OL}$  and  $V_{OH}$  are typical voltage output levels that occur with the output load.

Figure 11. The set-up and hold times from the data inputs (Dn) to the parallel load input (PL)


#### Table 8. Measurement points

Туре	Input	Output	
	VI	V <sub>M</sub>	V <sub>M</sub>
74HC165-Q100	V <sub>CC</sub>	0.5V <sub>CC</sub>	0.5V <sub>CC</sub>
74HCT165-Q100	3 V	1.3 V	1.3 V

#### **Nexperia**

## 74HC165-Q100; 74HCT165-Q100

#### 8-bit parallel-in/serial out shift register

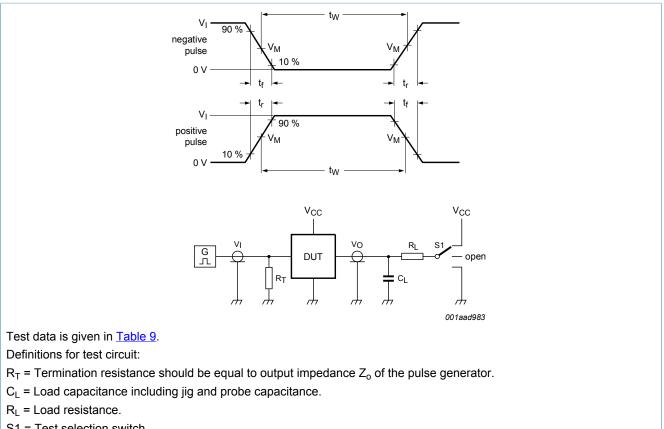

S1 = Test selection switch


Figure 12. Test circuit for measuring switching times

#### Table 9. Test data

Туре	Input		Load		S1 position
	VI	t <sub>r</sub> , t <sub>f</sub>	CL	RL	t <sub>PHL</sub> , t <sub>PLH</sub>
74HC165-Q100	V <sub>CC</sub>	6 ns	15 pF, 50 pF	1 kΩ	open
74HCT165-Q100	3 V	6 ns	15 pF, 50 pF	1 kΩ	open


8-bit parallel-in/serial out shift register

## 12 Package outline

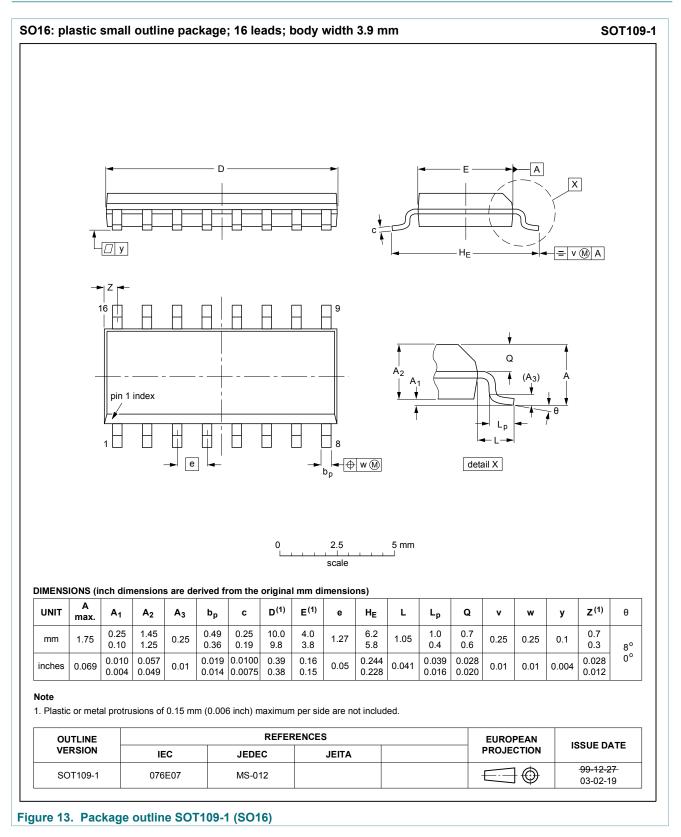


© Nexperia B.V. 2017. All rights reserved.

#### 8-bit parallel-in/serial out shift register

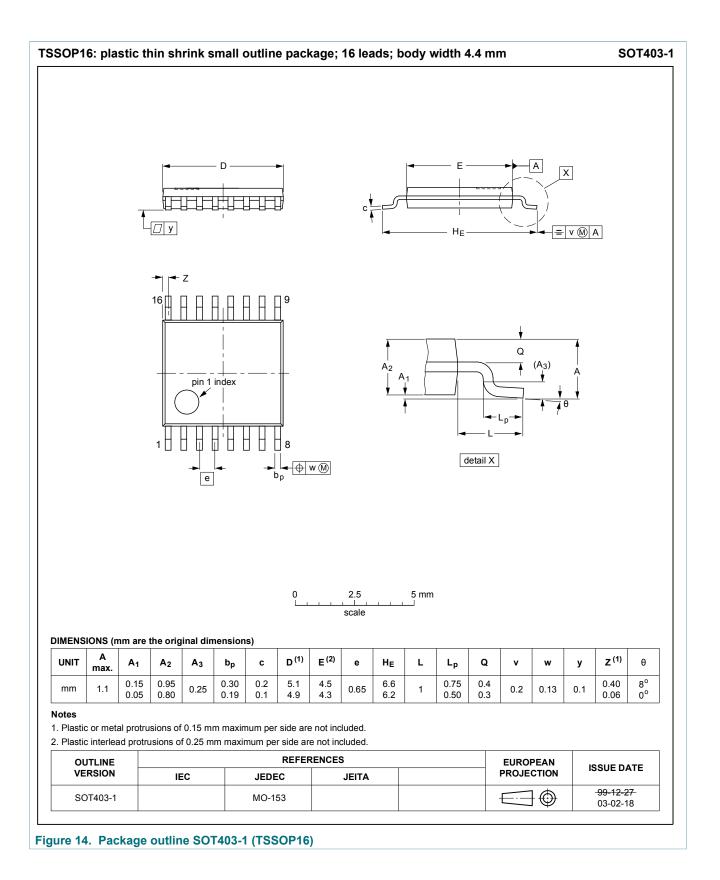

74HC\_HCT165\_Q100
Product data sheet

8-bit parallel-in/serial out shift register

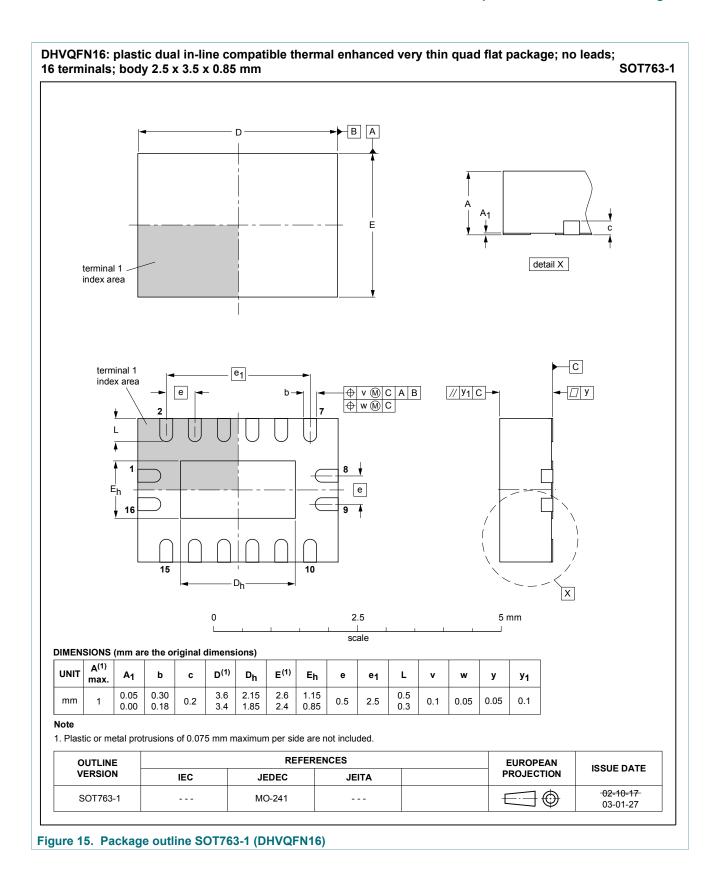

74HC\_HCT165\_Q100
Product data sheet

## **13 Abbreviations**

Table 10. Abbreviations			
Acronym	Description		
CMOS	Complementary Metal-Oxide Semiconductor		
DUT	Device Under Test		
ESD	ElectroStatic Discharge		
НВМ	Human Body Model		
MIL	Military		
ММ	Machine Model		
TTL	Transistor-Transistor Logic		

## 14 Revision history

Table 11. Revision history					
Document ID	Release date	Data sheet status	Change notice	Supersedes	
74HC_HCT165_Q100 v.2	20170821	Product data sheet	-	74HC_HCT165_Q100 v.1	
Modifications:	<ul> <li><u>General description</u> updated.</li> <li><u>Hold time</u> for 74HC165-Q100 has been updated.</li> <li>The format of this data sheet has been redesigned to comply with the identity guidelines of Nexperia.</li> <li>Legal texts have been adapted to the new company name where appropriate.</li> </ul>				
74HC_HCT165_Q100 v.1	20120717	Product data sheet	-	-	

## 15 Legal information

#### 15.1 Data sheet status

Document status <sup>[1][2]</sup>	Product status <sup>[3]</sup>	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

Please consult the most recently issued document before initiating or completing a design. [1]

The term 'short data sheet' is explained in section "Definitions".

[2] [3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL http://www.nexperia.com.

#### **15.2 Definitions**

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification - The information and data provided in a Product data sheet shall define the specification of the product as agreed between Nexperia and its customer, unless Nexperia and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Nexperia product is deemed to offer functions and qualities beyond those described in the Product data sheet.

#### 15.3 Disclaimers

Limited warranty and liability - Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. Nexperia takes no responsibility for the content in this document if provided by an information source outside of Nexperia. In no event shall Nexperia be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory. Notwithstanding any damages that customer might incur for any reason whatsoever, Nexperia's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Terms and conditions of commercial sale of Nexperia

Right to make changes - Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification. Customers are responsible for the design and operation of their applications and products using Nexperia products, and Nexperia accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Nexperia product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products. Nexperia does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Nexperia products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Nexperia does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — Nexperia products are sold subject to the general terms and conditions of commercial sale, as published at http://www.nexperia.com/profile/terms, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Nexperia hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Nexperia products by customer.

No offer to sell or license - Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Suitability for use in automotive applications - This Nexperia product has been qualified for use in automotive applications. Unless otherwise agreed in writing, the product is not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an Nexperia product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Nexperia and its suppliers accept no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk

74HC HCT165 Q100 Product data sheet

8-bit parallel-in/serial out shift register

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

**Translations** — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

#### **15.4 Trademarks**

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

8-bit parallel-in/serial out shift register

#### Contents

1	General description	1
2	Features and benefits	1
3	Applications	1
4	Ordering information	2
5	Functional diagram	2
6	Pinning information	
6.1	Pinning	
6.2	Pin description	3
7	Functional description	4
8	Limiting values	5
9	Recommended operating conditions	5
10	Static characteristics	6
11	Dynamic characteristics	8
11.1	Waveforms and test circuit	11
12	Package outline	15
13	Abbreviations	18
14	Revision history	18
15	Legal information	

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.

© Nexperia B.V. 2017.

All rights reserved.

For more information, please visit: http://www.nexperia.com For sales office addresses, please send an email to: salesaddresses@nexperia.com

Date of release: 21 August 2017 Document identifier: 74HC\_HCT165\_Q100