

Manual Switches
Electronic Control Keylock

AML27 Series

NON-LIGHTED



FEATURES

- Enable control of access to computer peripherals, keyboards, point-of-sale terminals, and security systems which are locked when unattended; and other locations where tampering must be discouraged.
- 2 or 3 positions, maintained (90° throw) and momentary action (60° throw).
- 5-bit key combinations

|                     |              |
|---------------------|--------------|
| Electrical Data     | page 19      |
| Accessories         | pages 56, 57 |
| Mounting Dimensions | pages 59, 62 |

- UL recognized, CSA certified.
- Static discharge protection (up to 20 kV when grounded).

AML27 ORDER GUIDE

| AML27 A        | B           | K            | 2                                        | AA                                           | 21                                                                | BA                   |
|----------------|-------------|--------------|------------------------------------------|----------------------------------------------|-------------------------------------------------------------------|----------------------|
| Housing Type   | Bezel Color | Button Color | Terminal Type                            | Circuitry Codes (Each pole has double-throw) | Operation Action (Key out in center position, except where noted) | Key Combinations     |
| AML27 A        | B           | K            | 2                                        | Silver Contacts: AA                          | CCW                                                               | (Two Keys Furnished) |
| Square housing | Black       | Black        | .110 x .020 (Solder or Quick-Connect)    | 1 pole AC                                    | Center                                                            | BA BL                |
| Non-Lighted    |             |              | 3                                        | Gold Contacts: BA                            | CW                                                                | BB BM                |
|                |             |              | .025 x .025 (Printed Circuit or Push-On) | 2 pole BC                                    |                                                                   | BC BN                |
|                |             |              |                                          |                                              |                                                                   | BD BP                |
|                |             |              |                                          |                                              |                                                                   | BE BQ                |
|                |             |              |                                          |                                              |                                                                   | BF BR                |
|                |             |              |                                          |                                              |                                                                   | BG BS                |
|                |             |              |                                          |                                              |                                                                   | BH BT                |
|                |             |              |                                          |                                              |                                                                   | BJ BV                |
|                |             |              |                                          |                                              |                                                                   | BK BW                |

REPLACEMENT KEYS

One key per listing.


| Key Combination | Key Code | Catalog Listing |
|-----------------|----------|-----------------|
| BA              | 110      | 30PA101-AML     |
| BB              | 109      | 30PA102-AML     |
| BC              | 108      | 30PA103-AML     |
| BD              | 107      | 30PA104-AML     |
| BE              | 106      | 30PA105-AML     |
| BF              | 105      | 30PA106-AML     |
| BG              | 104      | 30PA107-AML     |
| BH              | 103      | 30PA108-AML     |
| BJ              | 102      | 30PA109-AML     |
| BK              | 101      | 30PA110-AML     |
| BL              | 111      | 30PA111-AML     |
| BM              | 112      | 30PA112-AML     |
| BN              | 113      | 30PA113-AML     |
| BP              | 114      | 30PA114-AML     |
| BQ              | 115      | 30PA115-AML     |
| BR              | 116      | 30PA116-AML     |
| BS              | 117      | 30PA117-AML     |
| BT              | 118      | 30PA118-AML     |
| BV              | 119      | 30PA119-AML     |
| BW              | 120      | 30PA120-AML     |

Note: These keys fit the 5-bit keylocks in the Order Guide.


Specify different Key Combinations to acquire different keys, i.e.; AML27ABK2AA21BB and AML27ABK2AA21BK have different keys. AML27ABK2AA21BB and AML27ABK3BC25BB have identical interchangeable keys. Example: AML27ABK2AC28BB Square housing; black bezel and button; .110 x .020 terminals; 2-pole double-throw; silver contacts; 3-position maintained and key code "BB".

CIRCUITRY

2-Position Switches:

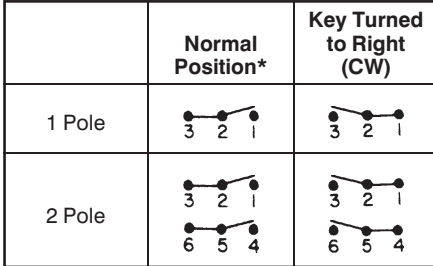

3-Position Switches (Available in 2-pole only.)

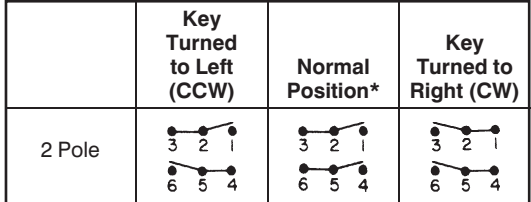

\* Circuit remains the same with key in or out.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[30PA101-AML](#) [30PA102-AML](#) [30PA104-AML](#) [30PA105-AML](#)