




REVISIONS					
P.	LTR	DESCRIPTION	DATE	DWN	APVD
	R1	REVISED PER ECO-16-004800	10SEP2016	NK	MZ
	S	REVISED PER ECO-16-018356	23MAR2017	RS	MZ

D


C

B

A

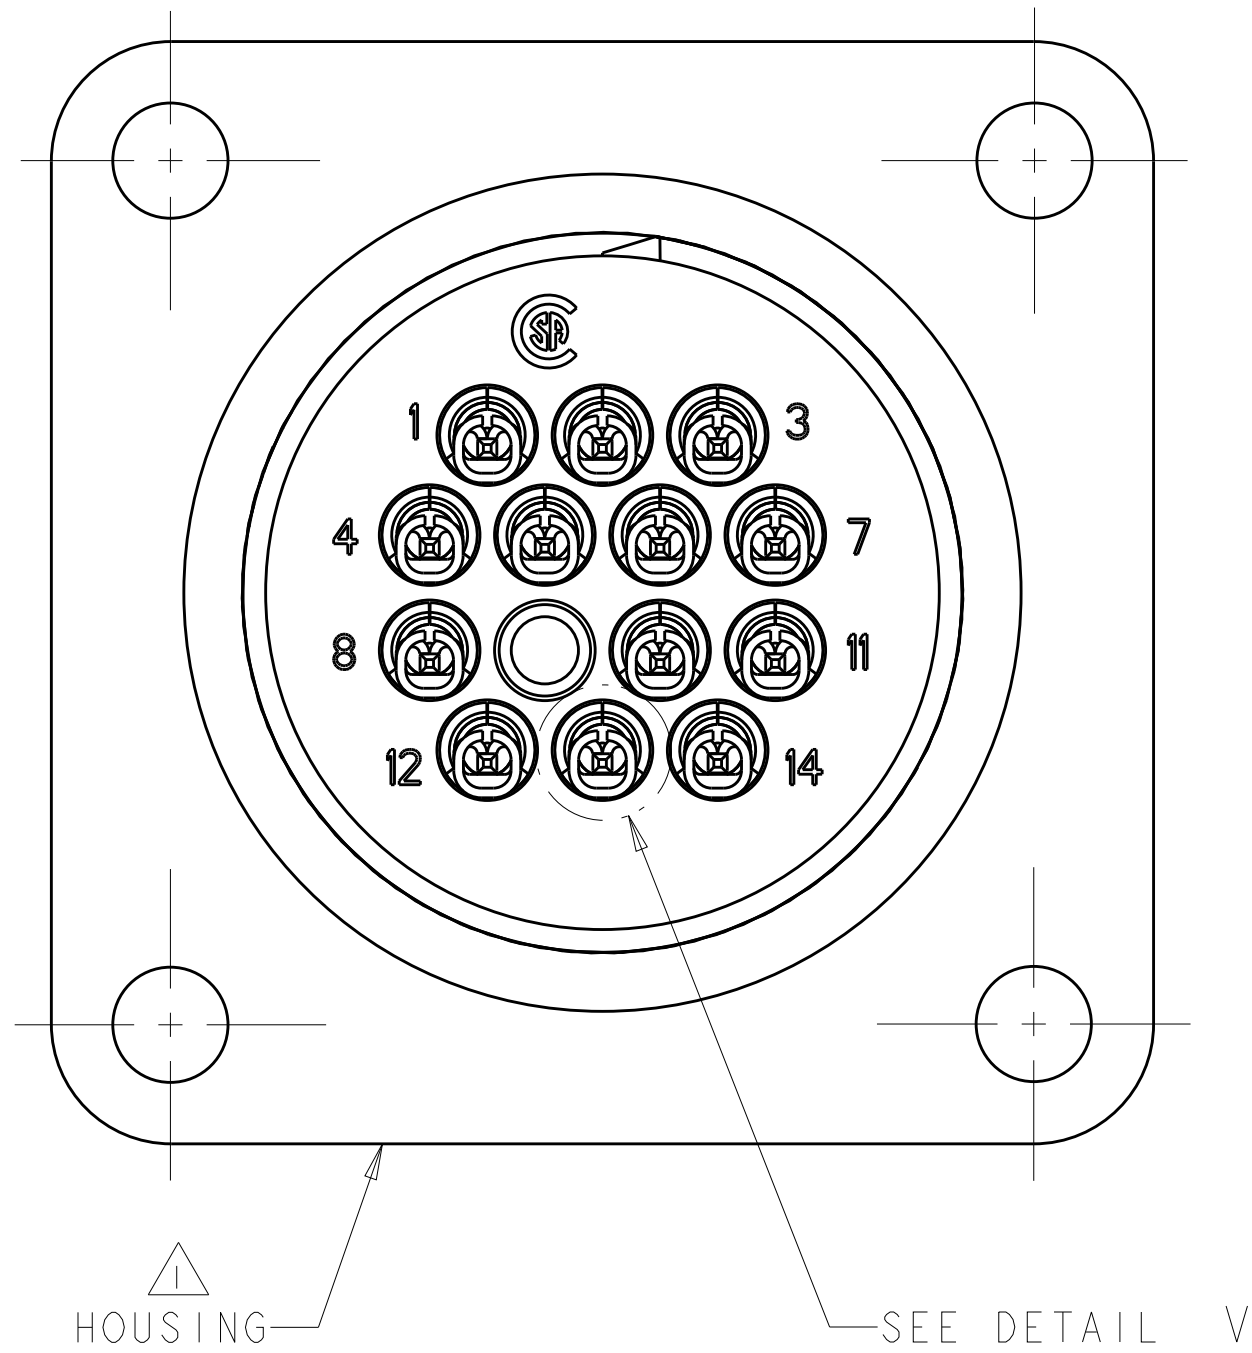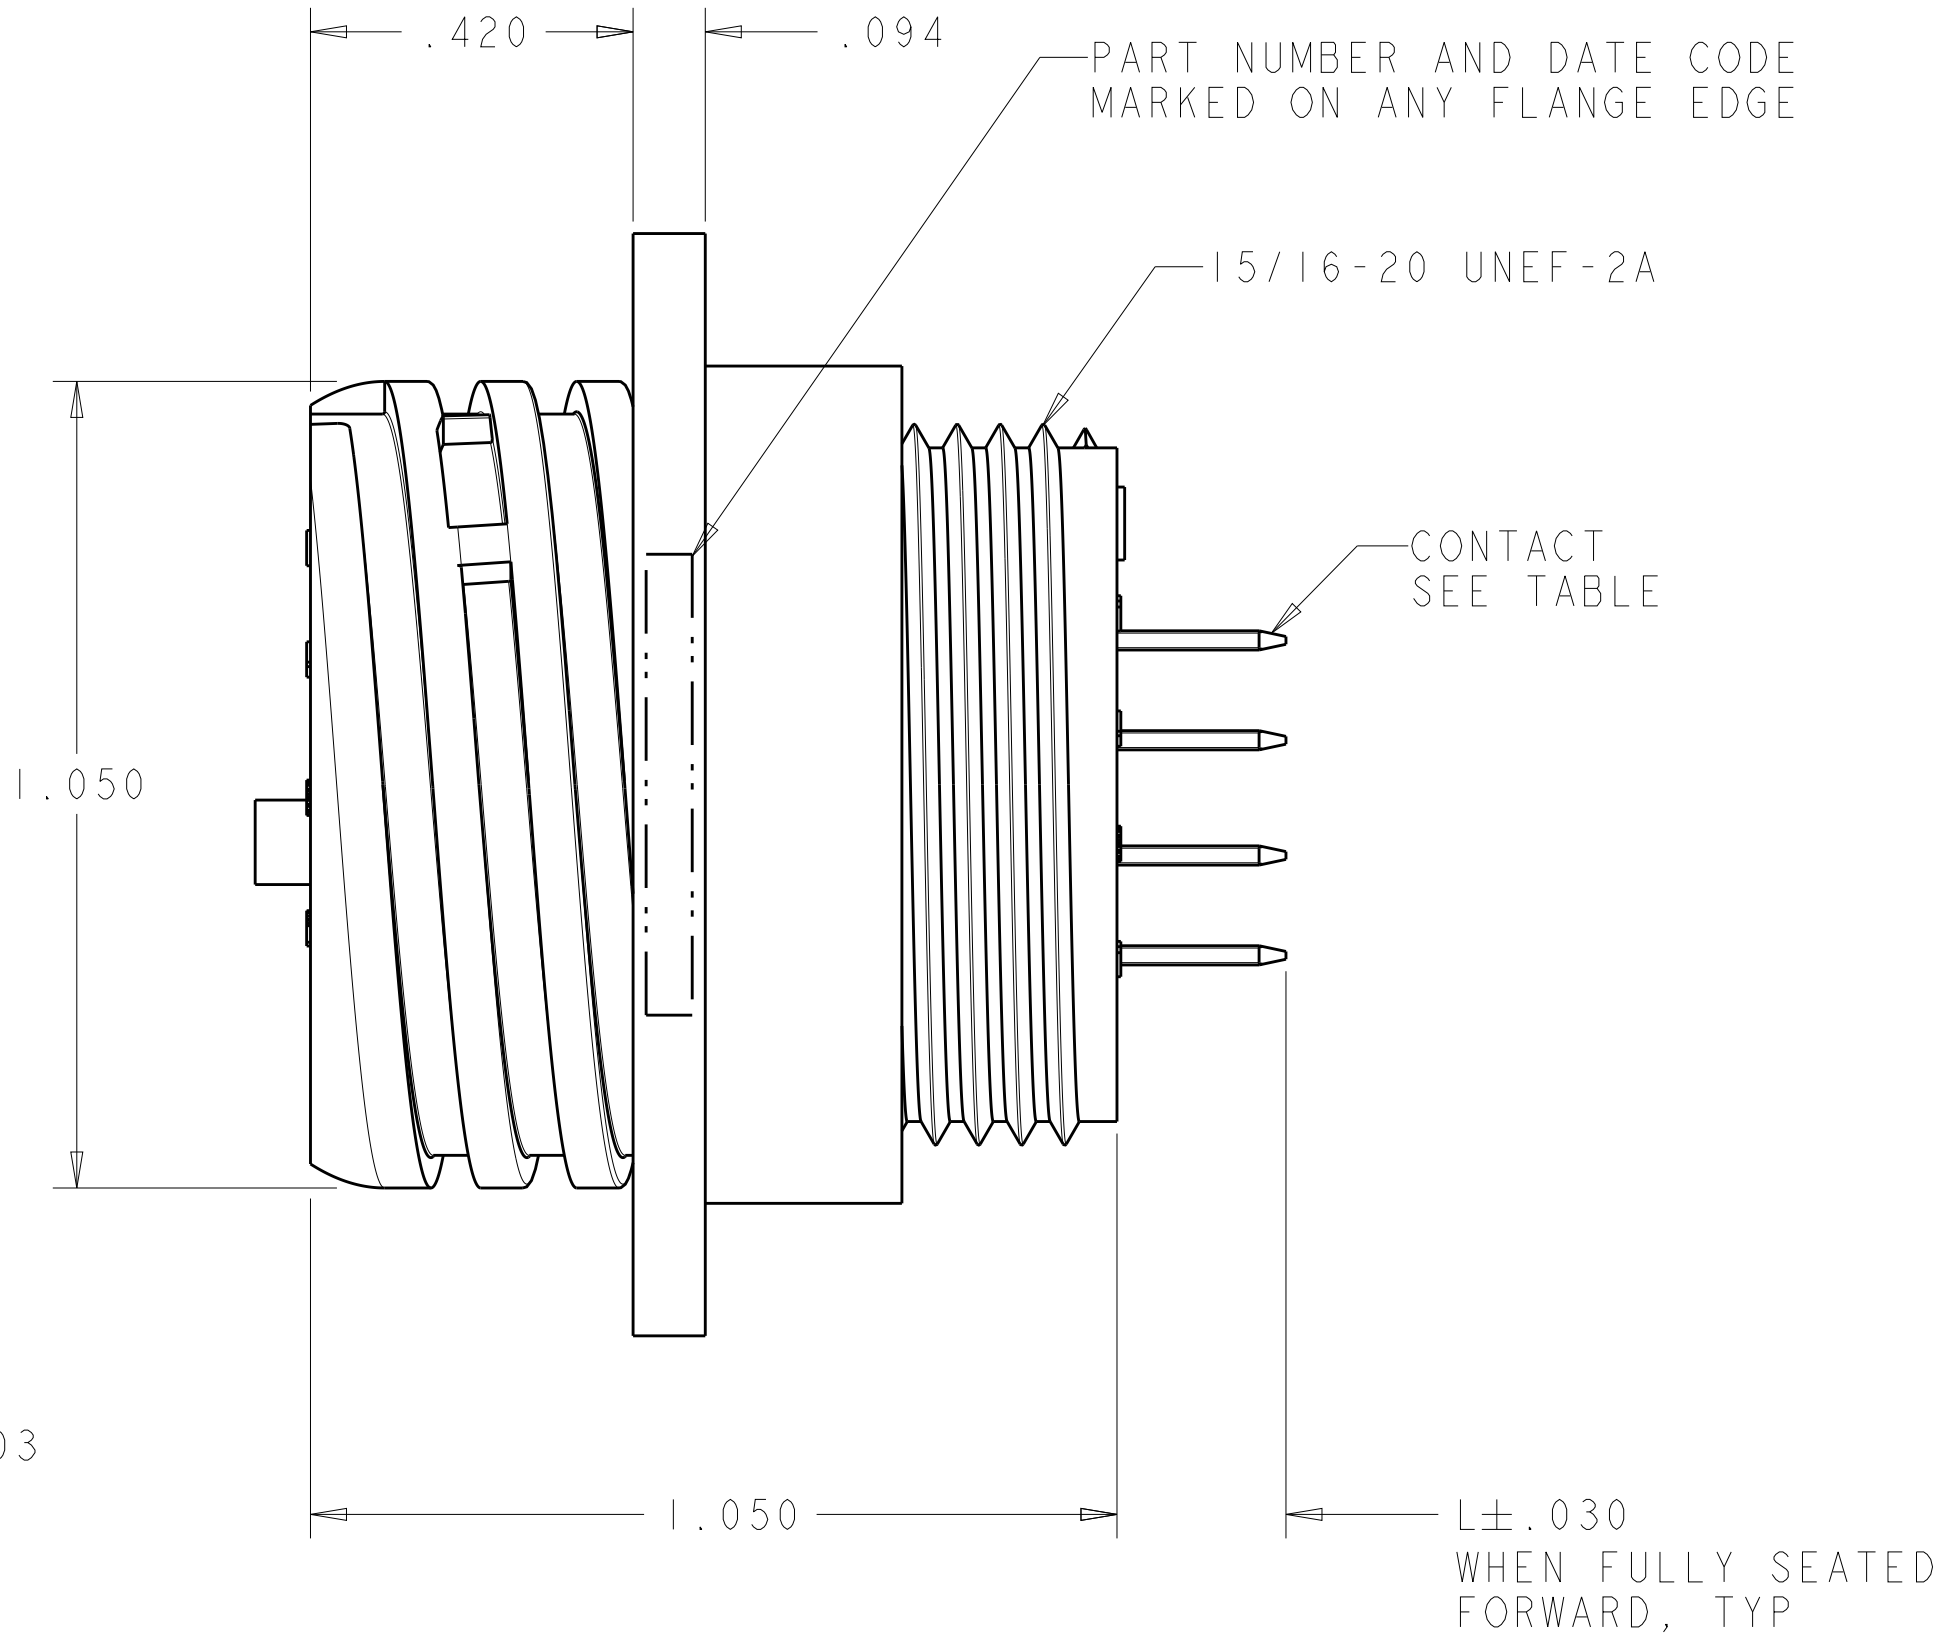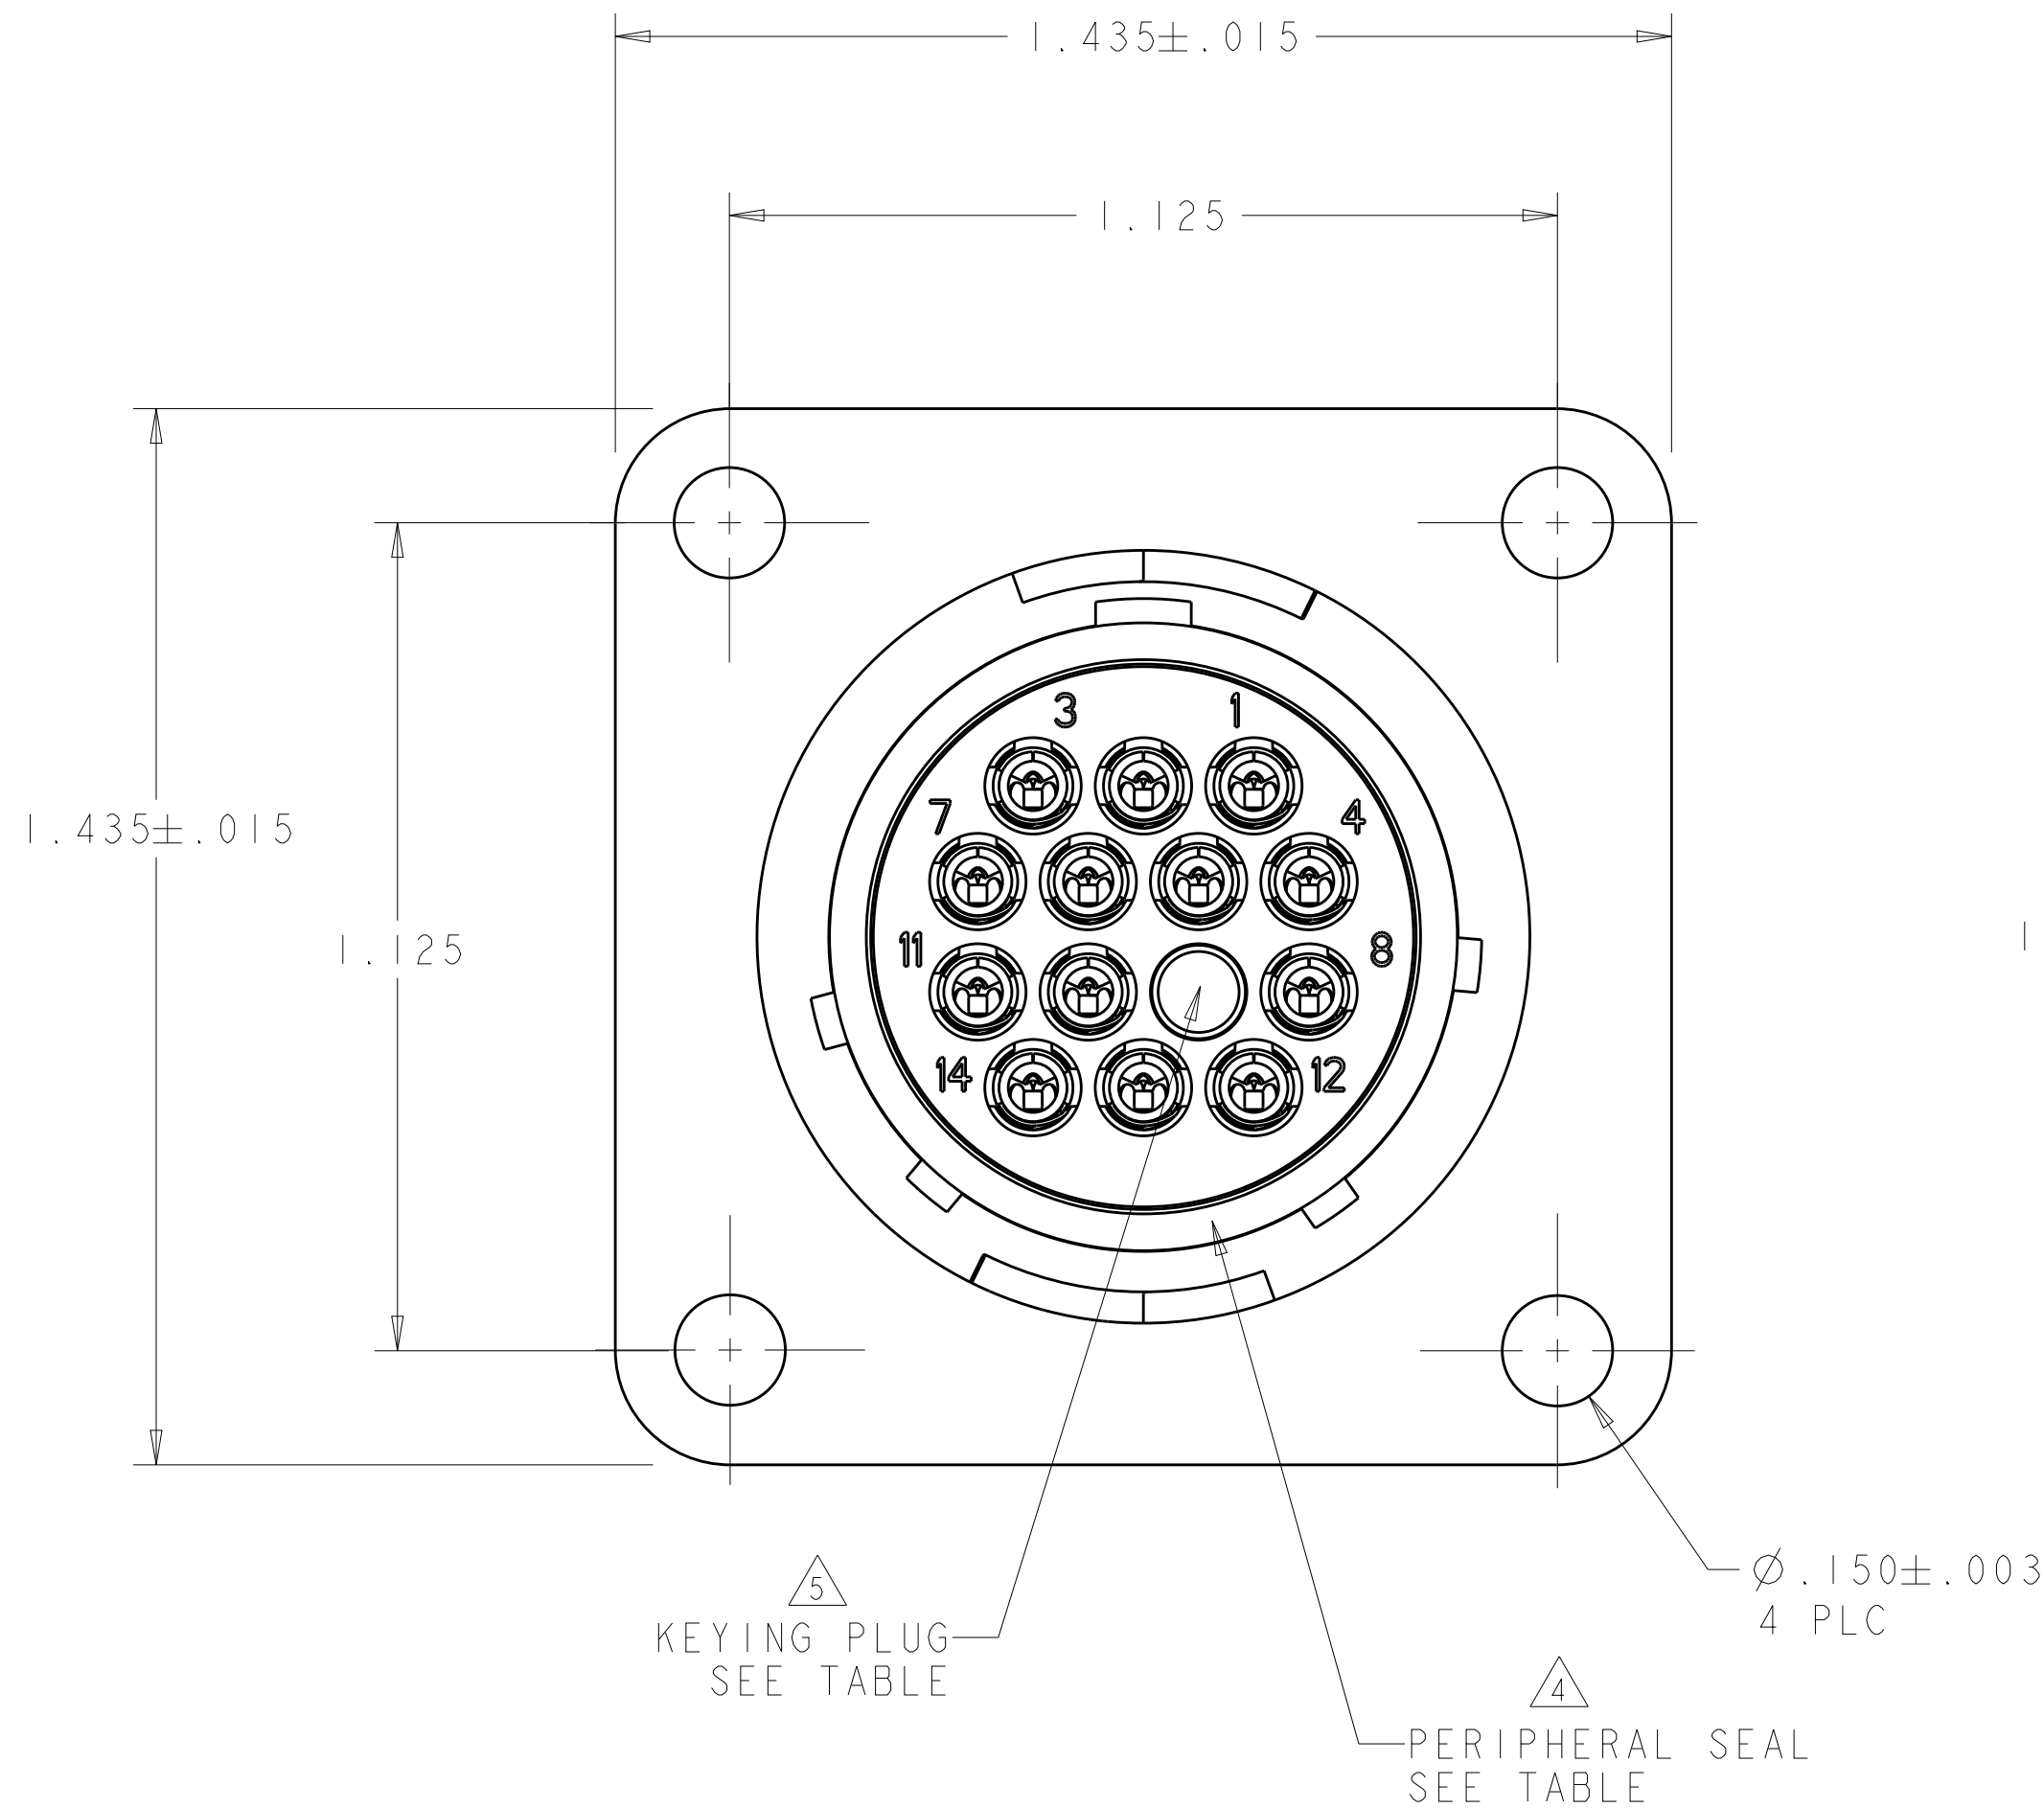

- 1 HOUSING: NYLON, UL 94 V-O RATED, BLACK.
- 2 CONTACT:
BODY - BRASS, .000100 MIN TIN-LEAD OVER .000050 MIN NICKEL.
POST - BRASS, .000100 MIN TIN-LEAD OVER .000050 MIN NICKEL.
- 3 CONTACT:
BODY - BRASS, .000100 MIN TIN OVER .000050 MIN NICKEL.
POST - BRASS, .000100 MIN TIN OVER .000050 MIN NICKEL.
- 4 PERIPHERAL SEAL: ELASTOMER, GRAY.
- 5 KEYING PLUG: NYLON, NATURAL.
- 6 .009 MAXIMUM CONTACT LEAD-IN SEAM GAP PERMISSIBLE
ON MATING FACE END.
- 7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

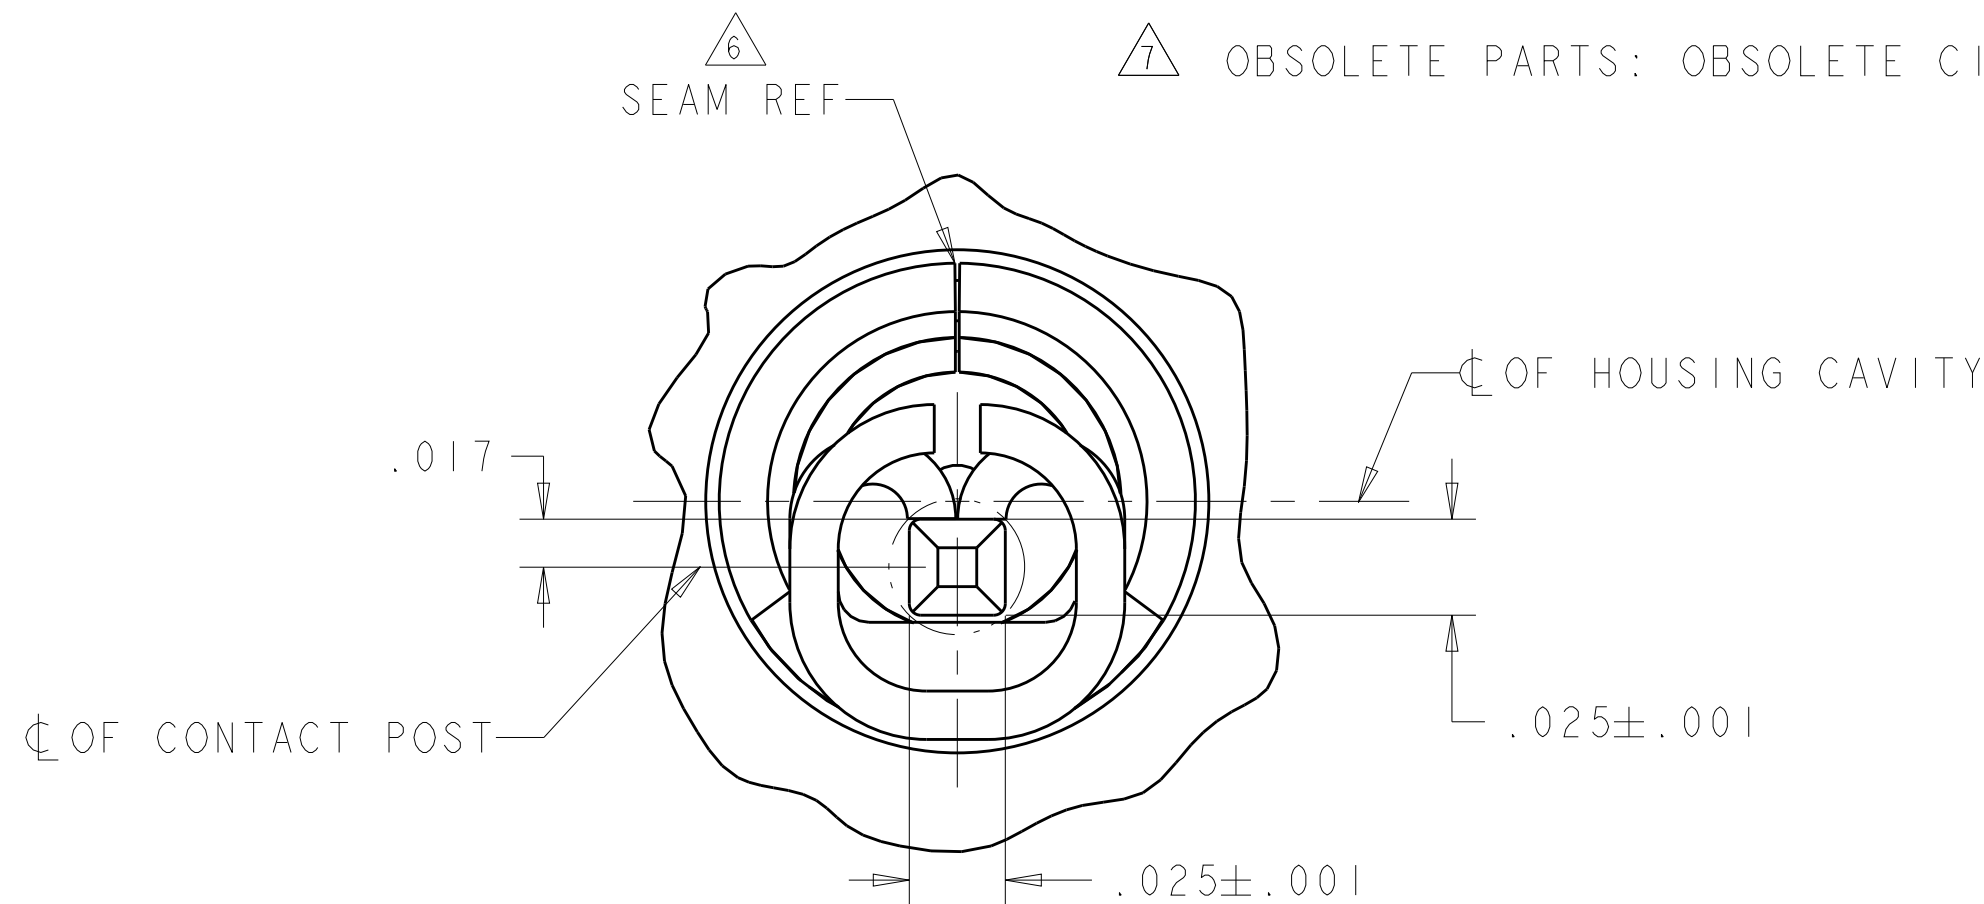

DETAIL V
SCALE 20:1

OBSOLETE		.368	-	YES	3	13	1-5,7-14	1-213825-8
		.220	-	YES	3	14	ALL	1-213825-7
OBSOLETE		.220	-	YES	3	11	1,3,4,6,8-14	1-213825-6
		.220	POSN 9	YES	3	13	1-8,10-14	1-213825-5
		.220	-	YES	3	13	1-5,7-14	1-213825-4
OBSOLETE	-	.557	-	NO	2	12	1,2,4,5,7-14	1-213825-3
		.220	POSN 9	YES	2	13	1-8,10-14	1-213825-2
7 OBSOLETE		.368	-	YES	2	13	1-5,7-14	1-213825-1
		.220	-	YES	2	13	1-5,7-14	1-213825-0
		.220	-	YES	2	11	1,3,4,6,8-14	213825-9
7 OBSOLETE		.220	POSN 9	YES	2	13	1-8,10-14	213825-5
OBSOLETE		.368	-	YES	2	13	1-5,7-14	213825-4
OBSOLETE		.220	-	YES	2	13	1-5,7-14	213825-3
7 OBSOLETE		.220	-	YES	2	11	1,3,4,6,8-14	213825-2
OBSOLETE		.220	-	YES	2	14	ALL	213825-1
STATUS		L	KEYING PLUG	PERIPHERAL SEAL	FINISH	QTY	SELECT LOAD IN POSITIONS	PART NUMBER
							CONTACTS	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES

MATERIAL

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±.0
1 PLC ±.0
2 PLC ±.0
3 PLC ±.010
4 PLC ±.0
ANGLES ±.0
FINISH

-

-

DWN S. WELDON 23MAY2003
CHK S. HEADER 23MAY2003
APVD S. HEADER 23MAY2003

PRODUCT SPEC
APPLICATION SPEC
WEIGHT

CUSTOMER DRAWING

TE Connectivity

NAME RECEPTACLE ASSEMBLY, POSTED, SERIES 1, REVERSE SEX, CPC

SIZE A100779C=213825
SCALE 4:1
SHEET 1 OF 2
REV S

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-213825-2](#)