


# Micro-D Dust Caps and Interfacial Seals



MIL-DTL-83513  
Micro-D

## MOLDED PLASTIC DUST CAPS




Anti-static Micro-D dust caps are available to fit all sizes of Metal Shell Micro-D connectors. These dust caps are injection-molded from a rugged plastic material that resists cracking and provides protection.

Material: Polypropylene, anti-static, color black.

Layout	Part Number	A Ref.	B Ref.
9P	000-01-09-162	.315 (8.0)	.184 (4.7)
9S	000-01-09-163	.385 (9.8)	.250 (6.4)
15P	000-01-15-162	.465 (11.8)	.184 (4.7)
15S	000-01-15-163	.535 (13.6)	.250 (6.4)
21P	000-01-21-162	.615 (15.6)	.184 (4.7)
21S	000-01-21-163	.685 (17.4)	.250 (6.4)
25P	000-01-25-162	.715 (18.2)	.184 (4.7)
25S	000-01-25-163	.785 (19.9)	.250 (6.4)
31P	000-01-31-162	.865 (22.0)	.184 (4.7)
31S	000-01-31-163	.935 (23.7)	.250 (6.4)
37P	000-01-37-162	1.015 (25.8)	.184 (4.7)
37S	000-01-37-163	1.085 (27.6)	.250 (6.4)
51P	000-01-51-162	.965 (24.5)	.227 (5.8)
51S	000-01-51-163	1.035 (26.3)	.292 (7.4)
100P	000-01-00-162	1.364 (34.6)	.270 (6.9)
100S	000-01-00-163	1.437 (36.5)	.338 (8.6)

## MICRO-D INTERFACIAL SEALS FOR MWDM SOCKET CONNECTORS

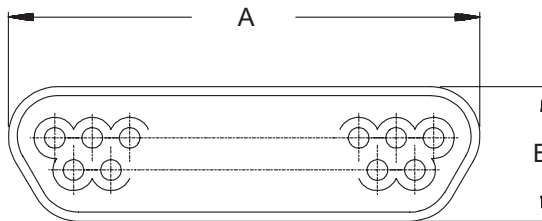

Micro-D interfacial seals are available for metal shell socket connectors. Intended for use as field replacements for damaged seals, these seals are molded from fluoroelastomer and meet NASA outgassing requirements.

Material: Blue fluoroelastomer per ZZ-R-765.

Layout	Part Number	A Ref.	B Ref.
9S	000-01-09-132	.330 (8.4)	.180 (4.6)
15S	000-01-15-132	.480 (12.2)	.180 (4.6)
21S	000-01-21-132	.630 (16.0)	.180 (4.6)
25S	000-01-25-132	.730 (18.5)	.180 (4.6)
31S	000-01-31-132	.880 (22.4)	.180 (4.6)
37S	000-01-37-132	1.030 (26.2)	.180 (4.6)
51S	000-01-51-132	.976 (24.8)	.223 (5.7)
100S	000-01-00-132	1.386 (35.2)	.270 (6.9)

Metric dimensions (mm) are indicated in parentheses.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Glenair:

[000-01-00-163](#) [000-01-00-162](#) [000-01-51-163](#) [000-01-25-163](#) [000-01-00-132](#) [000-01-09-132](#) [000-01-09-164](#) [000-01-09-165](#) [000-01-15-132](#) [000-01-15-164](#) [000-01-15-165](#) [000-01-21-132](#) [000-01-21-162](#) [000-01-21-163](#) [000-01-21-164](#) [000-01-21-165](#) [000-01-25-132](#) [000-01-25-164](#) [000-01-25-165](#) [000-01-31-132](#) [000-01-31-163](#) [000-01-31-164](#) [000-01-31-165](#) [000-01-37-132](#) [000-01-37-164](#) [000-01-37-165](#) [000-01-51-132](#) [000-01-51-164](#) [000-01-51-165](#) [000-01-15-163](#) [000-01-09-162](#) [000-01-15-162](#) [000-01-25-162](#) [000-01-31-162](#) [000-01-51-162](#) [000-01-37-162](#) [000-01-09-163](#) [000-01-37-163](#) [000-01-69-163](#)