

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION

, 19

© COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC DIST

G 14

P

F ZONE

LTR

DESCRIPTION

DATE

APPD

EC 0720-0279-93

6-21-93

SS BB

REVISIONS

AMP

WIRE RANGE


4/0 AWG

STRANDED

METRIC

DIMENSIONS LISTED IN mm [INCHES]

1. TONGUE MATERIAL THK 2.59±0.08[.102±.003] FOR 19.43[.765] MAX WIRE INS DIA

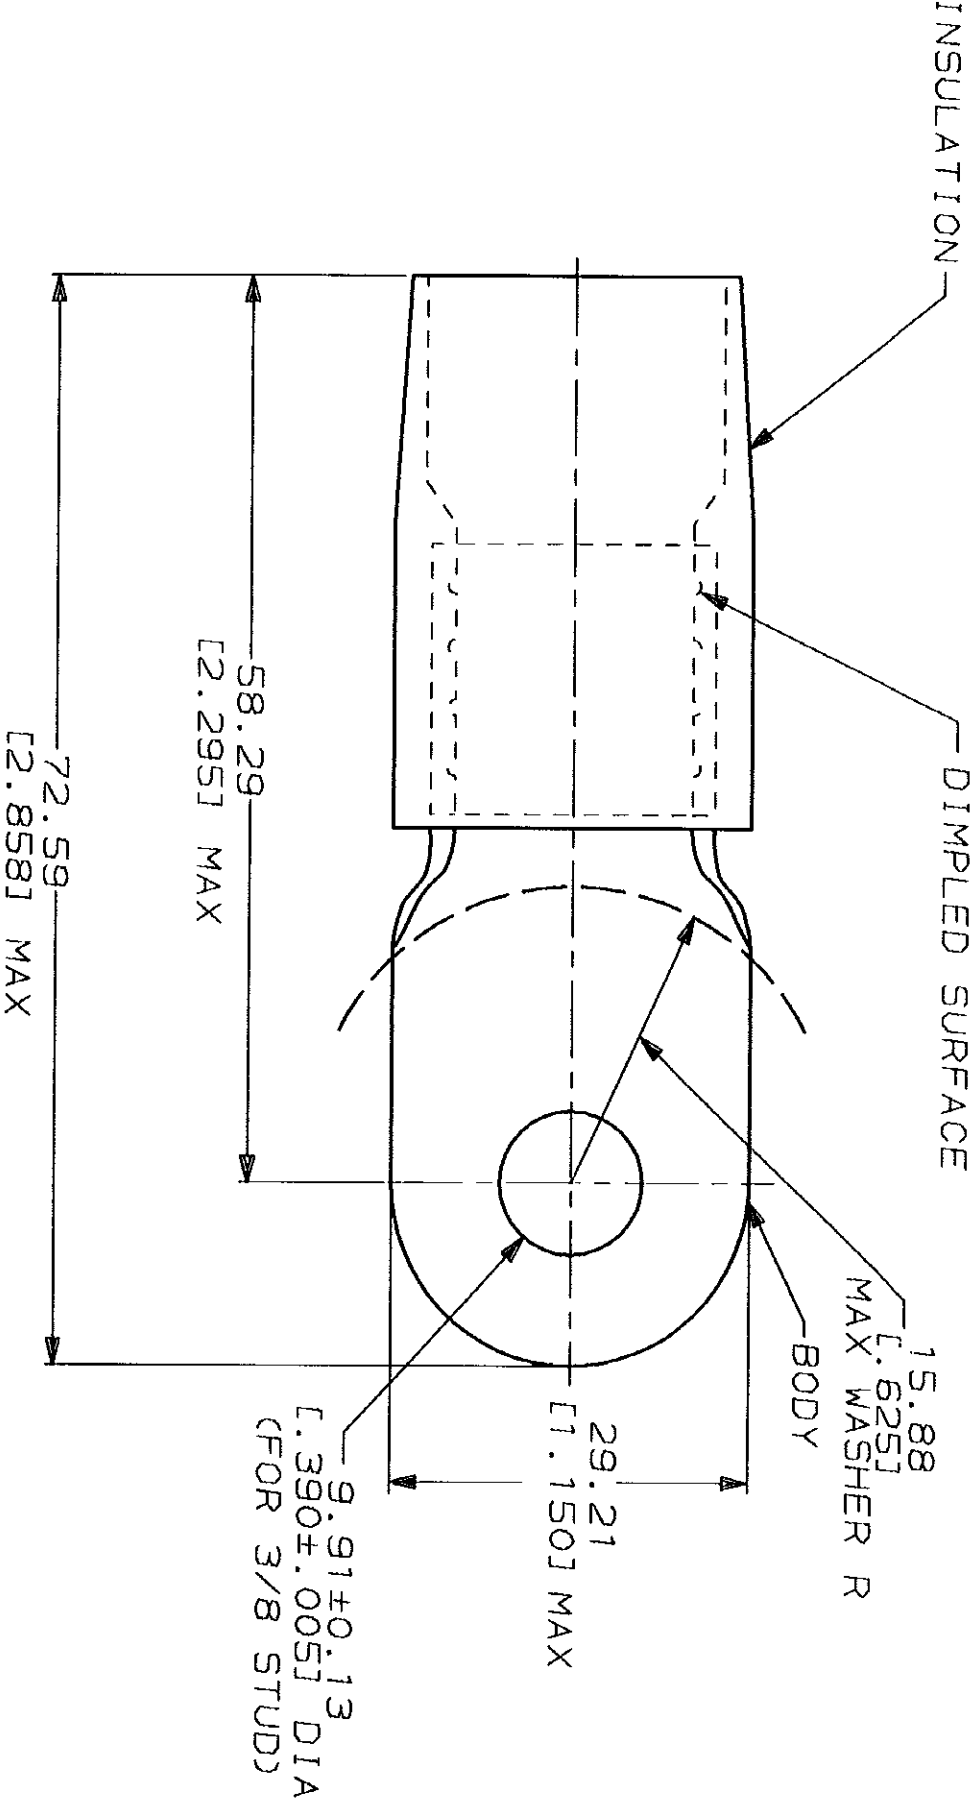

AMP INCORPORATED
CUSTOMER SERVICE SYSTEMS

MAX RECOMMENDED OPERATING
TEMPERATURE:
105°C

FOR ADDITIONAL
PRODUCT INFORMATION OR
COPIES OF DRAWINGS
AND TECHNICAL DOCUMENTS

1-800-522-6752

TOOLING ASSISTANCE CENTER

1-800-722-1111

FOR ORDER ENTRY

1-800-526-5142

THIS DRAWING IS A CONTROLLED DOCUMENT FOR
AMP INCORPORATED. IT IS SUBJECT TO CHANGE
AND THE CONTROLLING ENGINEERING ORGANIZATION
SHOULD BE CONTACTED FOR THE LATEST REVISION.

MS25036-140
CLASS 2

MILITARY P/N AND CLASS

QTY

LOOSE PC

324187

PACKAGE TYPE

PART NO

AMP

AMP Incorporated
Harrisburg, PA 17105-3608

NAME

TERMINAL, RING TONGUE, TERMINYL
WIRE SIZE: 4/0 AWG

SIZE CAGE CODE DRAWING NO

B 00779 G=324187

SCALE NTS SHEET 1 OF 1

DR 6-21-93
S.S. GOLDEN

CHK 6-21-93
R. HERSEY

APPD 6-21-93
B. BARE

APPD 6-21-93
M. ELIS

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

FINISH

MATERIAL

COPPER PER ASTM B-152

NYLON (MIL-M-20693) TYPE 1

COLOR: BLUE

DO NOT SCALE PRINT.

UNLESS SPECIFIED

2 PLG DEC ± 0.20(.008)

3 PLG DEC ±

AMP 1470-15 REV 3-92

22 JUN 1993

12:38:32

AMPT1122

<U0128A>DEPT1132>AMPT1122>U.CUSTOMINYL

CUSTOMER DRAWING

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[324187](#)