
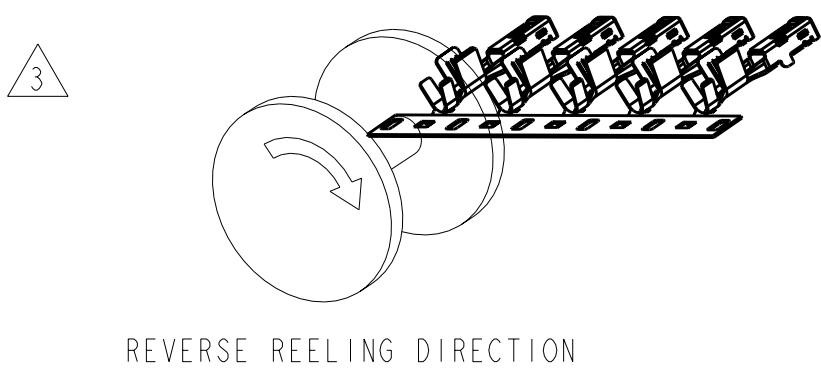



LOC		DIST		REVISIONS						
GE	00	P	LTR	DESCRIPTION			DATE	DWN	APVD	
			E1	REVISED PER ECO-11-005030			26APR2011	RK	HMR	

1 MATERIAL: 0.30 THICK COPPER ALLOY, PREPLATED WITH 0.0008 MINIMUM THICK REFLOW TIN OR BRIGHT TIN (ELV COMPLIANT).

ALTERNATE MATERIAL: 0.30 THICK COPPER ALLOY, PREPLATED WITH 0.0008 MINIMUM THICK BRIGHT TIN (ELV COMPLIANT).

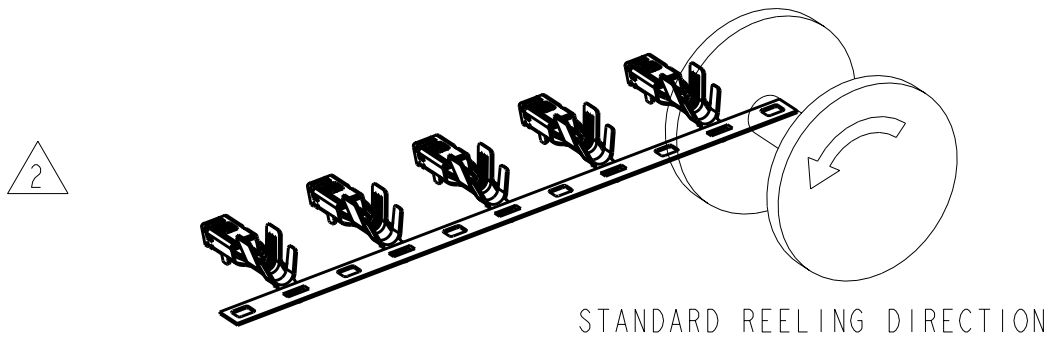

4. QUALIFICATION OF THE CRIMP APPLICATION TOOLING SHALL BE CONTROLLED BY THE REQUIREMENTS ESTABLISHED UNDER USCAR 21.
5. LOOSE END SPLICING TO BE USED.

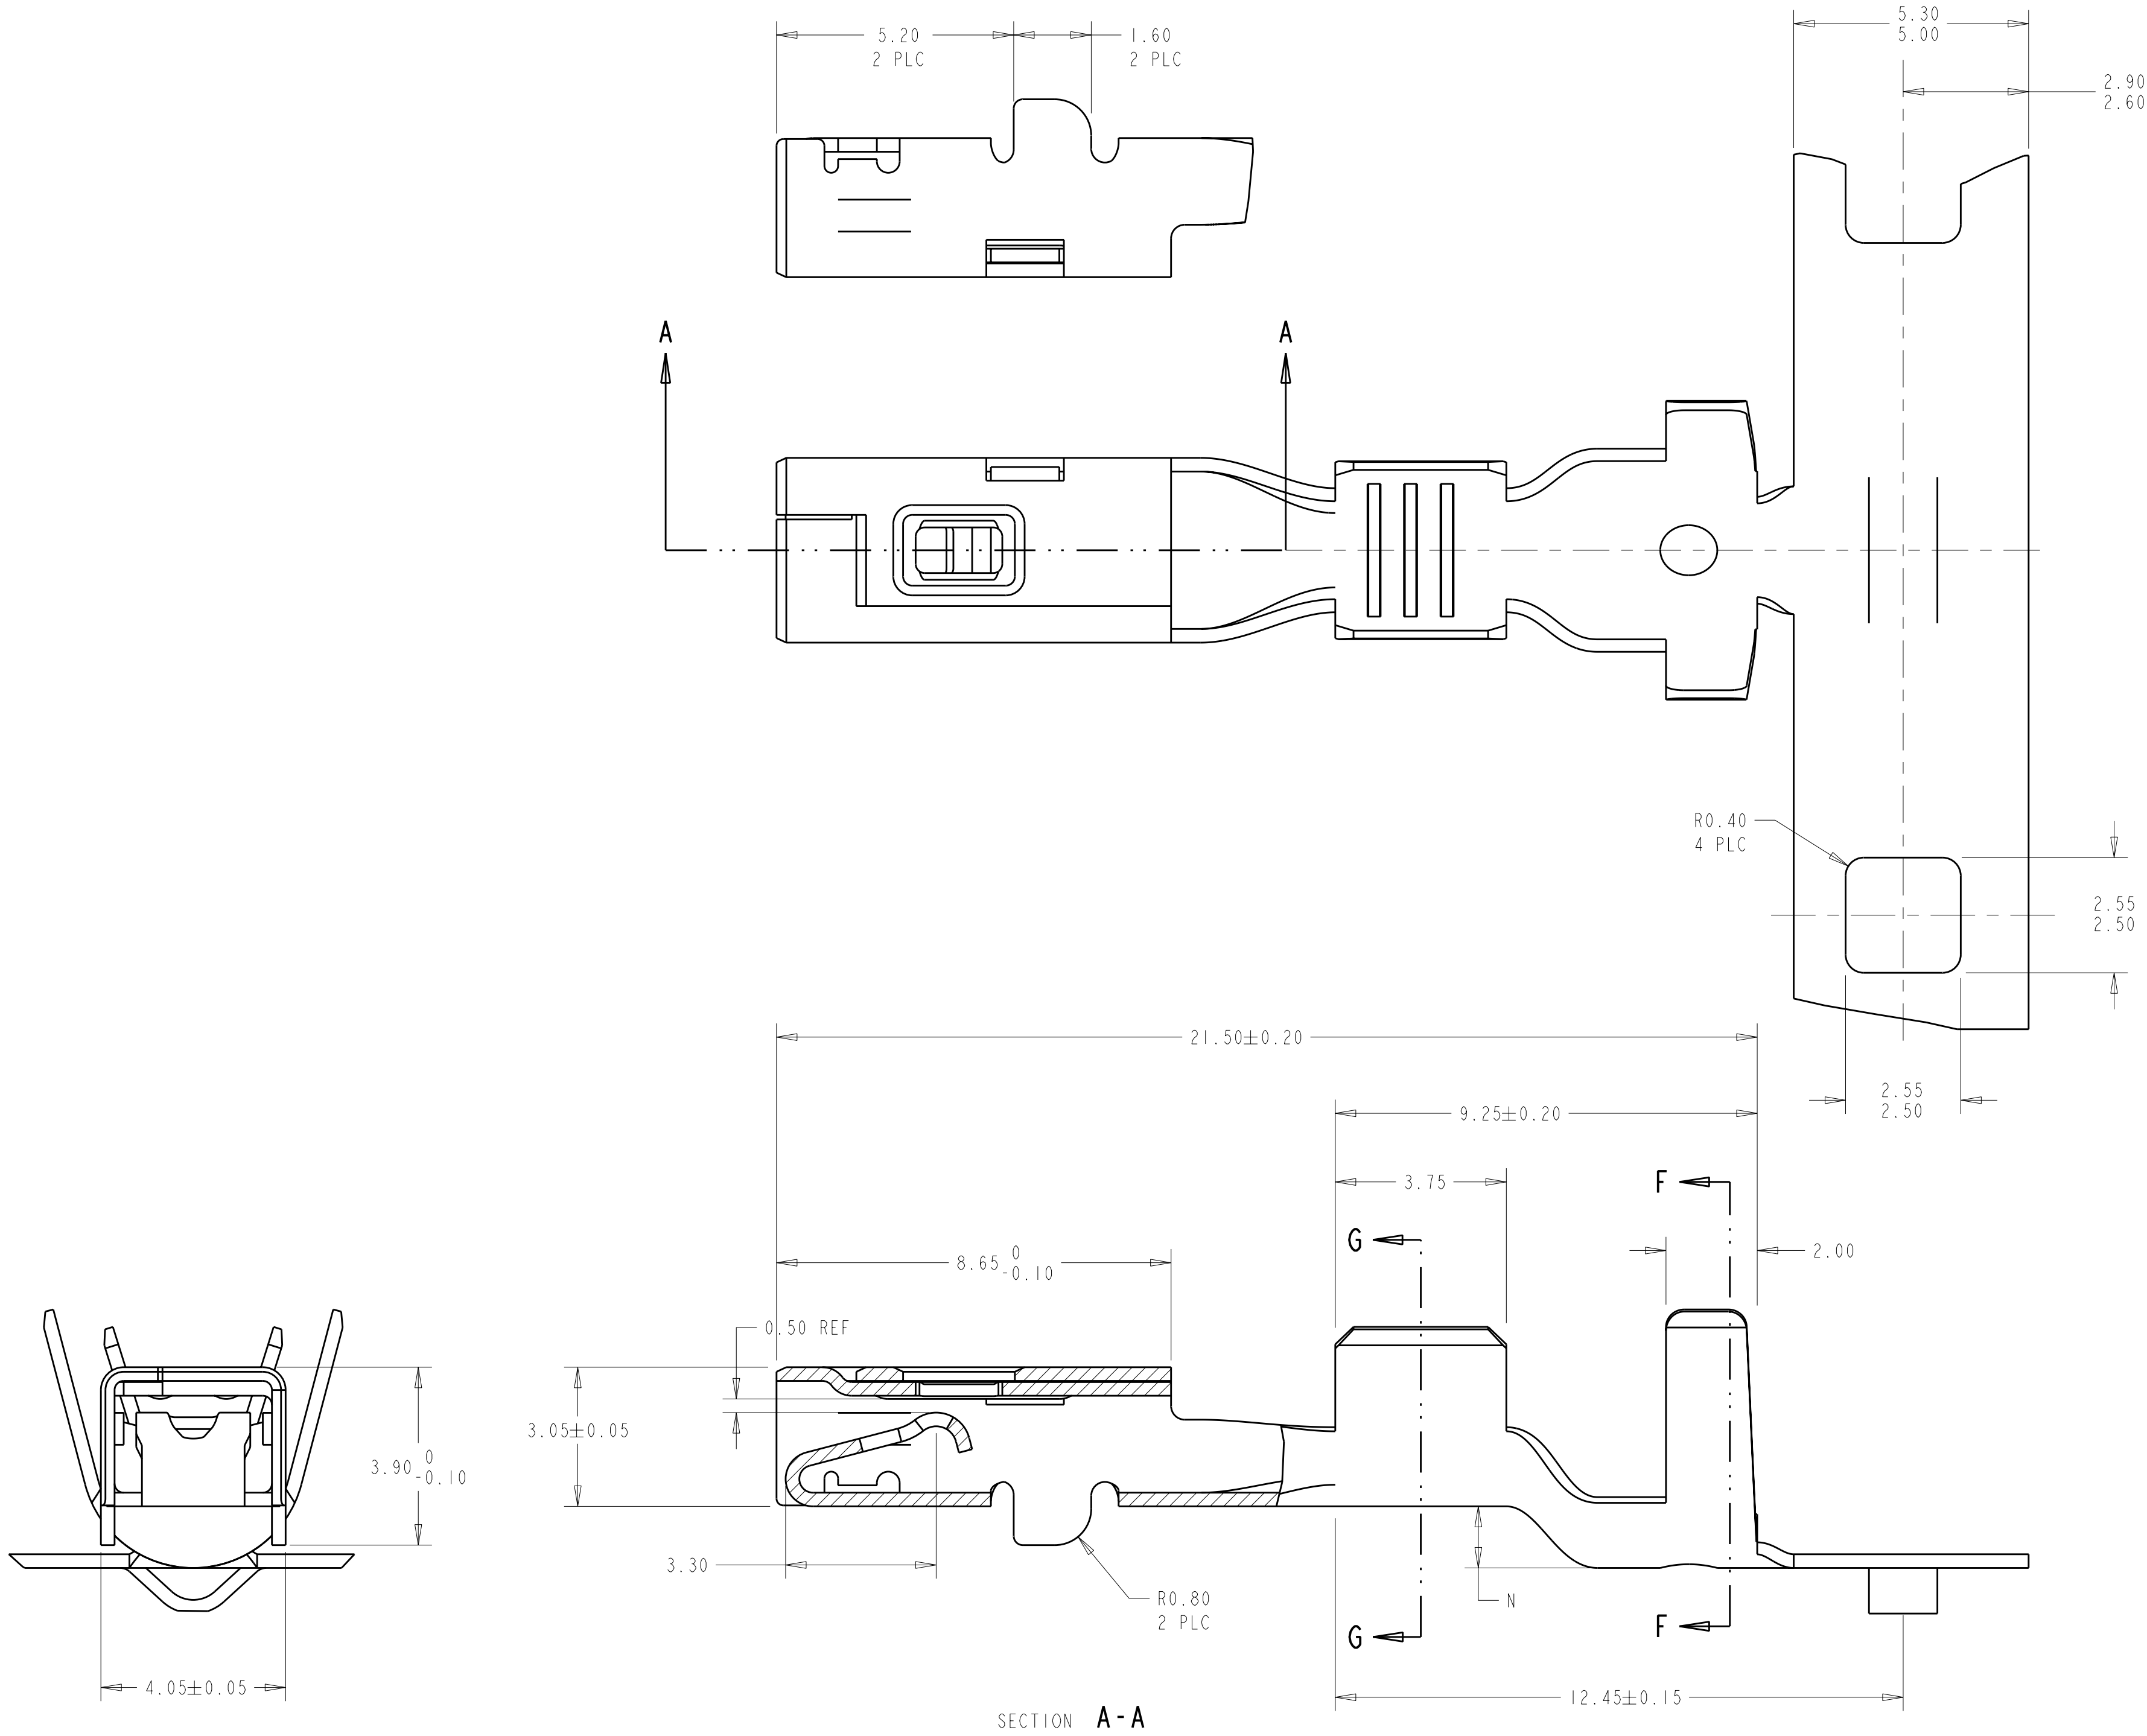

3	1326032-6 REELED FOR AMP APPLICATORS						12 AWG	I-1326032-2
	1326032-5 REELED FOR AMP APPLICATORS						14 AWG	I-1326032-1
	1326032-4 REELED FOR AMP APPLICATORS						16 AWG	I-1326032-0
	1326032-3 REELED FOR AMP APPLICATORS						18 AWG	1326032-9
	1326032-2 REELED FOR AMP APPLICATORS						20 AWG	1326032-8
2	1326032-1 REELED FOR AMP APPLICATORS						22 AWG	1326032-7
	1.35	6.8	4.30	6.09	4.7	2.70	5.25	12 AWG 1326032-6
	1.35	6.5	4.30	5.62	3.9	1.70	3.88	14 AWG 1326032-5
	1.10	5.6	3.80	4.54	3.9	1.70	3.88	16 AWG 1326032-4
	1.10	5.6	3.80	4.54	3.3	1.30	2.76	18 AWG 1326032-3
	0.90	5.0	3.40	4.11	3.3	1.30	2.76	20 AWG 1326032-2
REELING	N	L	ØK	J	H	ØF	E	WIRE SIZE PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN D. STRAUSSER 28APR99		TE Connectivity	
CHK D. BROWN 28APR99				APVD D. BROWN 28APR99		NAME	
DIMENSIONS: mm				PRODUCT SPEC		2.8mm RECEPTACLE, SEALED	
TOLERANCES UNLESS OTHERWISE SPECIFIED:				SAE/USCAR-2 8/97		SIZE CAGE CODE DRAWING NO	
9 PLC ±.3				APPLICATION SPEC		RESTRICTED TO	
1 PLC ±0.10				114-13013		A1 00779 C=1326032	
3 PLC ±.10				WEIGHT		SCALE 10:1	
5 PLC ±.10				CUSTOMER DRAWING		SHEET 1 OF 1	
4 PLC ±.10				ANGLES		REV E1	
MATERIAL				FINISH			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-1326032-0](#) [1-1326032-0 \(Mouser Reel\)](#) [1-1326032-0 \(Cut Strip\)](#)