
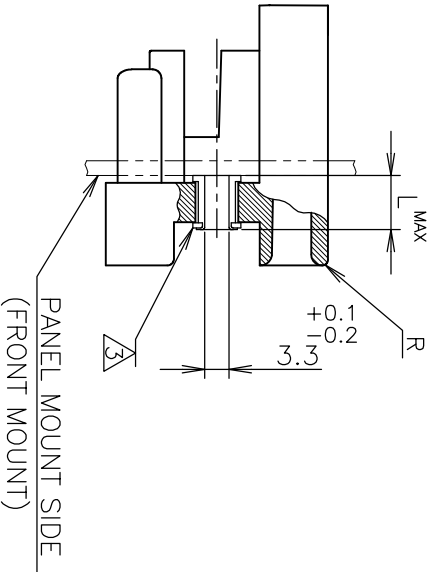
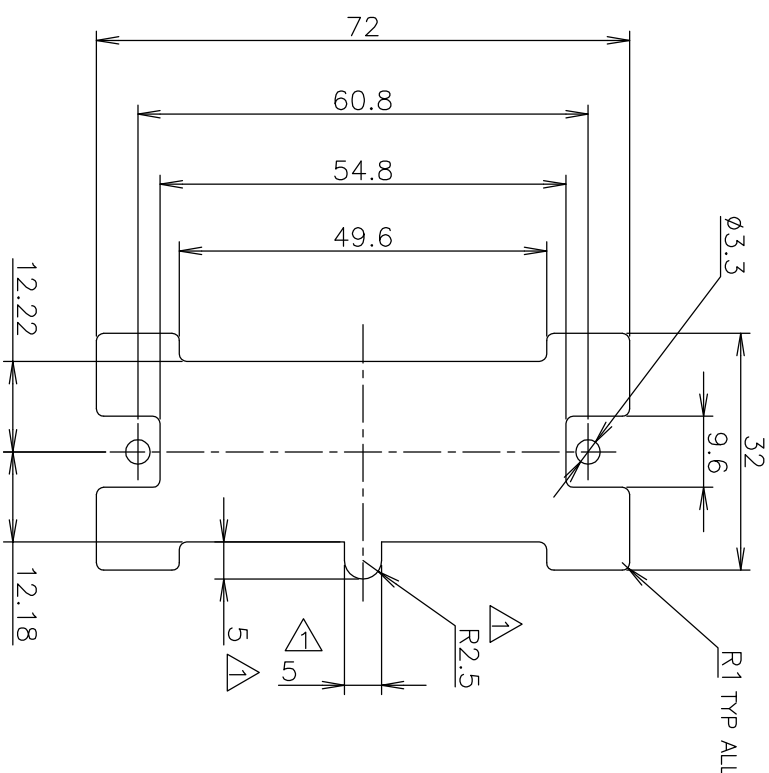
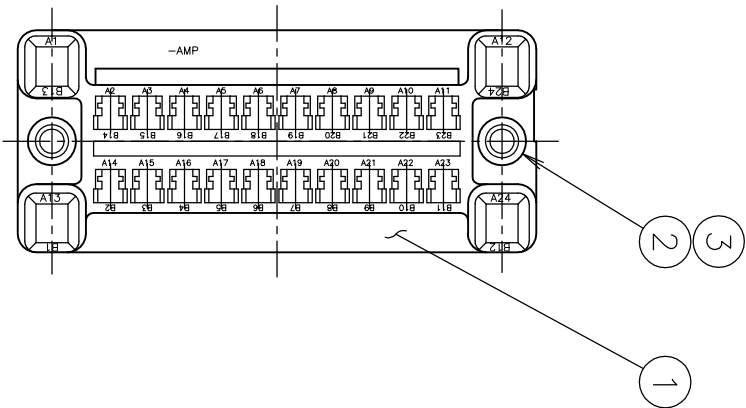
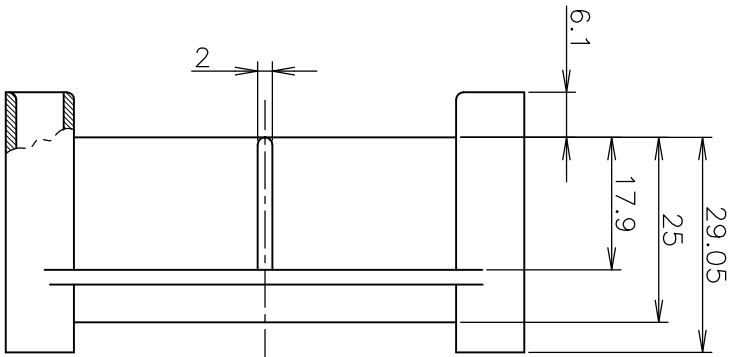


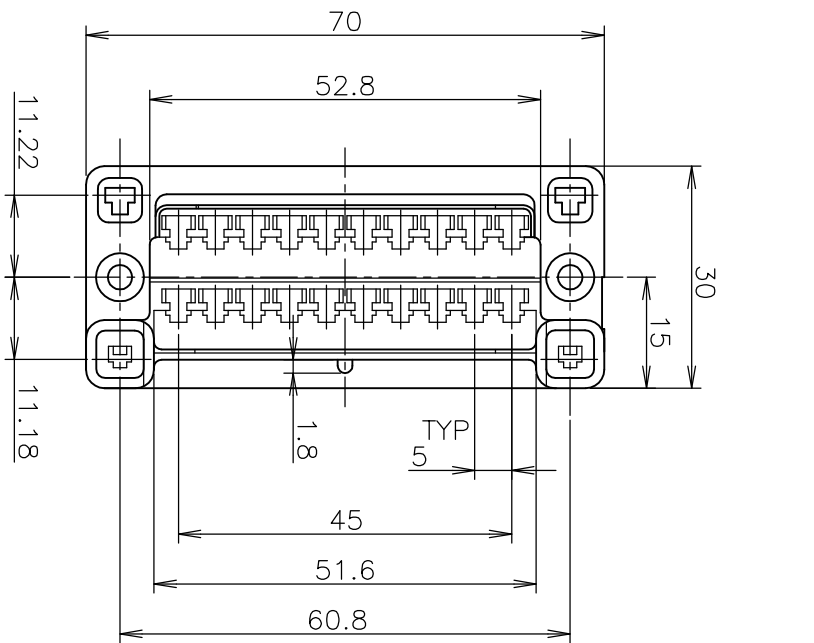

PANEL CUT DIMENSIONS
(FRONT MOUNT)

THIS DIMENSION USELESS IN CASE OF REAR MOUNTING.
2 CONTACT P/N
DRAWER CONTACT (20EA)
AWG#24~#20 P/N: 170311-1, 170313-1
AWG#20~#16 P/N: 170484-1, 170485-1
MIC CONTACT (4EA)
TAB CONTACT P/N: 170221-4, 170222-3 (Au PL: 0.76u)
RECEPTACLE CONTACT P/N: 170286-4, 170289-3 (Au PL: 0.76u)
P/N: 170286-2, 170289-2 (Au PL: 0.76u)
FLOATING ALLOWANCE TO CONTACT AXIS IS LONGITUDINAL
DIRECTION AND LATERAL DIRECTION.

2	+-	LONGITUDINAL	0.3	BUSH 5.0 DIA	7.9	BRASS (NICKEL)	③
+-	2	LATERAL	0.8	BUSH 5.66 DIA	7.4	BRASS (NICKEL)	②
1	1	LONGITUDINAL	0.05	HSG 24P HIGH CURRENT DRAWER	+-	PBT (BLUE)	①
1	1	LATERAL	0.14				
-2	-1	△	FLOATING ALLOWANCE	NAME	L MAX	MATERIAL (FINISH)	ITEM
QTY RECD PER ASSY							
THIS DRAWING IS A CONTROLLED DOCUMENT.							
PART LIST							
DWN	C.ZHU	07SEP05					
CHK	I.WANG	07SEP05					
APVD	S.YAO	07SEP05					
PRODUCT SPEC							
APPLICATION SPEC							
WEIGHT							
CUSTOMER DRAWING							
SIZE							
CAGE CODE							
DRAWING NO							
24 POSITION HIGH CURRENT DRAWER WITH BUSH							
RESTRICTED TO							
SCALE							
1:1							
SHEET							
1 OF 1							
REV							
B							

GENERAL TOLERANCE
10 ≥ : ±0.2
30 ≥ > 10: ±0.25
100 ≥ > 30: ±0.3
ANGLES: ±3°

THIS DIMENSION USELESS IN CASE OF REAR MOUNTING.
2 CONTACT P/N
DRAWER CONTACT (20EA)
AWG#24~#20 P/N: 170311-1, 170313-1
AWG#20~#16 P/N: 170484-1, 170485-1
MIC CONTACT (4EA)
TAB CONTACT P/N: 170221-4, 170222-3 (Au PL: 0.76u)
RECEPTACLE CONTACT P/N: 170286-4, 170289-3 (Au PL: 0.76u)
P/N: 170286-2, 170289-2 (Au PL: 0.76u)
FLOATING ALLOWANCE TO CONTACT AXIS IS LONGITUDINAL
DIRECTION AND LATERAL DIRECTION.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5176916-2](#)