




TOP VIEW



SIDE VIEW

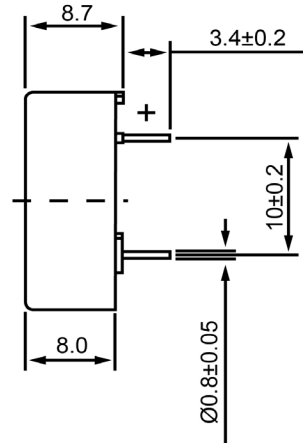

BOTTOM VIEW



Specifications

Description	Value	Unit
Shape	Round	
Resonant Frequency	1,500	(Hz)
Frequency Range	1,500 ~ 4,000	(Hz)
SPL @ 10cm	75	(dBA)
Impedance	8	(Ohm)
Cone Material	Mylar	
Nominal Power	0.3	(W)
Max Power	0.4	(W)
Mount Type	Thru Hole	
Operating Temperature	-20 ~ +60	°C
Storage Temperature	-30 ~ +60	°C
Weight	3.3	(g)

Notes

- 1) All dimensions are in mm unless otherwise noted
- 2) All parts meet RoHS



Revision History

Version	Description	Date	Approved		
1	Released from Engineering	2/8/2014	J.S.		
Drawn by	Date	Checked by	Date	Approved by	Date
G.W.	1/27/2014	C.E.	2/5/2014	J.S.	2/8/2014

Dynamic Speaker

SM231508-1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[DB Unlimited:](#)

[SM231508-1](#)