


RF ESD Protection Diodes

- ESD protection of RF antenna / interfaces or ultra high speed data lines acc. to:
IEC61000-4-2 (ESD): ± 15 KV (air / contact)
IEC61000-4-4 (EPT): 40 A (5/50 ns)
IEC61000-4-5 (surge): 5 A (8/20 μ s)
- Very low line capacitance: 0.4 pF @ 1 GHz
(0.2 pF per diode)
- Ultra low series inductance: 0.4 nH per diode
- Very low clamping voltage
- Ultra small leadless package: 1.2 x 0.8 x 0.39 mm³
- Pb-free (RoHS compliant) package



Applications in anti-parallel configuration


- For low RF signal levels without superimposed DC voltage: e.g. GPS, XM-Radio, Sirius, DVB, DMB, DAB, Remote Keyless Entry

Applications in rail-to-rail configuration

- For high RF signal levels or low RF signal levels with superimposed DC voltage: e.g. HDMI, S-ATA, Gbit Ethernet



ESD0P4RFL



Type	Package	Configuration	Marking
ESD0P4RFL	TSLP-4-7	anti-parallel	E4

Maximum Ratings at $T_A = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Value	Unit
ESD contact discharge ¹⁾	V_{ESD}	15	kV
Peak pulse current ($t_p = 8 / 20 \mu\text{s}$) ²⁾	I_{pp}	5	A
Operating temperature range	T_{op}	-55...150	$^\circ\text{C}$
Storage temperature	T_{stg}	-65...150	

Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
Characteristics -					
Reverse working voltage ³⁾	V _{RWM}	-	-	50	V
Reverse current ³⁾ V _R = 50 V	I _R	-	20	100	nA
Forward clamping voltage ²⁾ I _{PP} = 5 A	V _{FC}	-	6	9	V
Diode capacitance ⁴⁾ V _R = 0 V, f = 1 GHz	C _T	-	0.4	-	pF
Series inductance per diode	L _S	-	0.4	-	nH

¹⁾ V_{ESD} according to IEC61000-4-2, only valid in anti-parallel or rail-to-rail connection.

Please refer to the application examples.

²⁾ I_{pp} according to IEC61000-4-5, only valid in anti-parallel or rail-to-rail connection.


Please refer to the application examples.

³⁾Only valid in rail-to-rail configuration with $V_{\text{CC}} \leq V_{\text{RWM}}$

⁴⁾Total capacitance line to ground (2 diodes in parallel)

Forward clamping voltage $V_{FC} = f(I_{PP})$


$t_p = 8 / 20 \mu s$

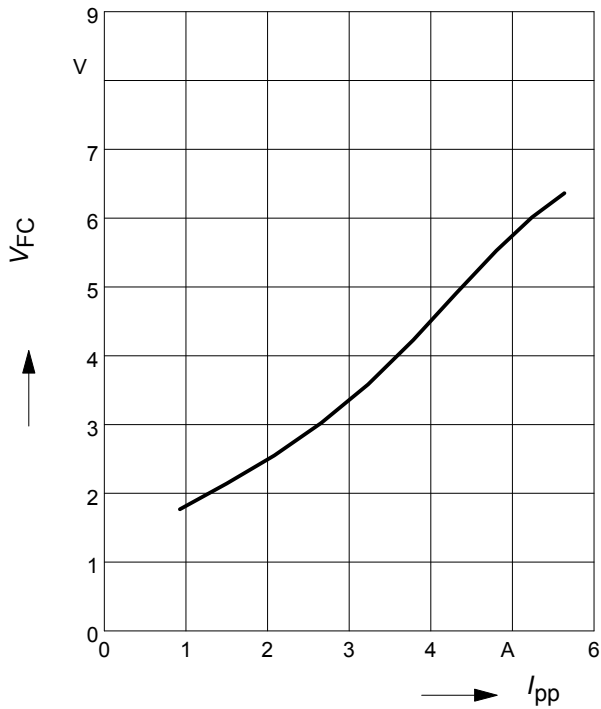

Reverse current $I_R = f(V_R)$


$T_A = \text{Parameter}$

leakage in rail-to-rail configuration

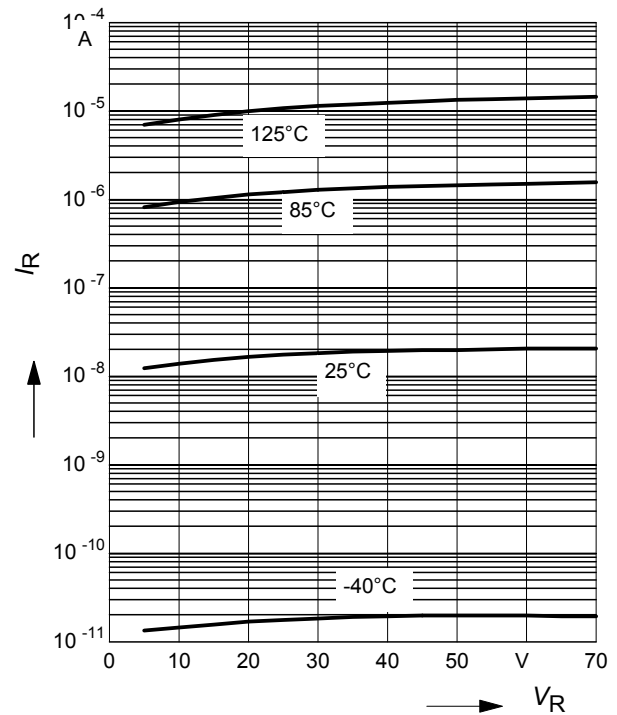


Forward current $I_F = f(V_F)$

leakage in anti-parallel configuration

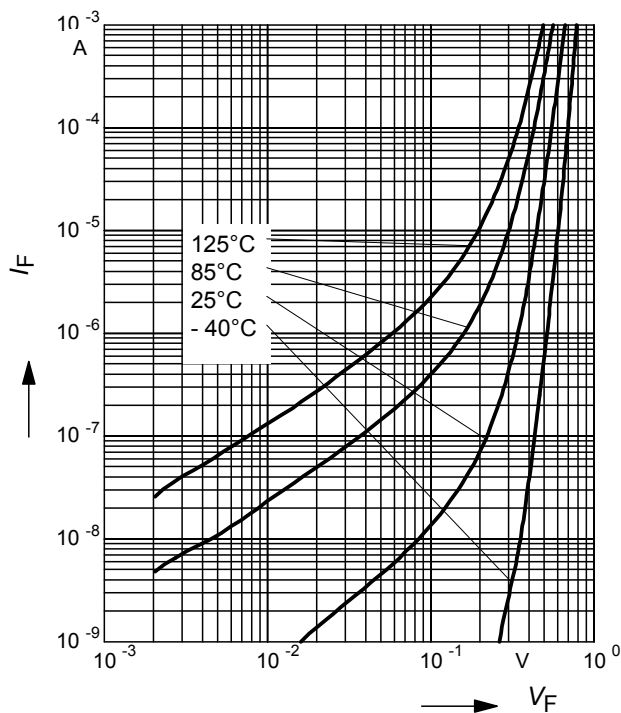


Line capacitance $C_T = f(f)$

$V_R = 0 V$

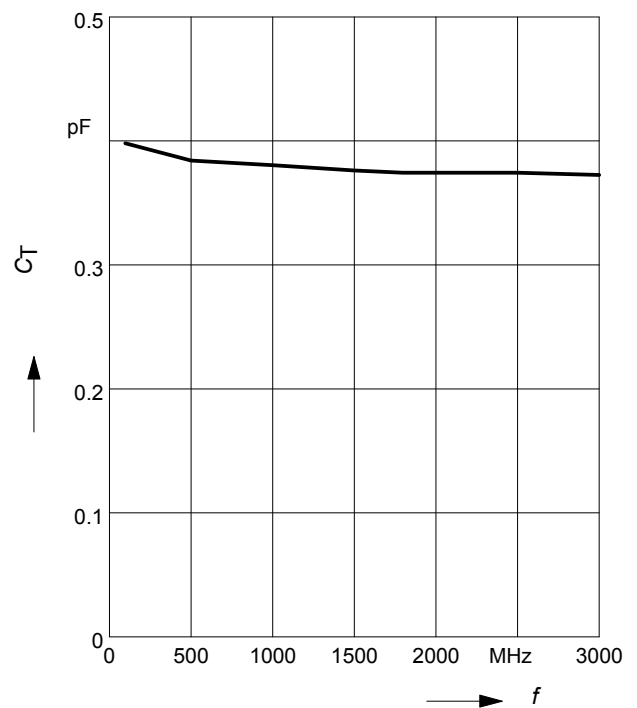


Insertion loss $I_L = -|S_{21}|^2 = f(f)$

$V_R = 0 \text{ V}$, $Z = 50 \Omega$

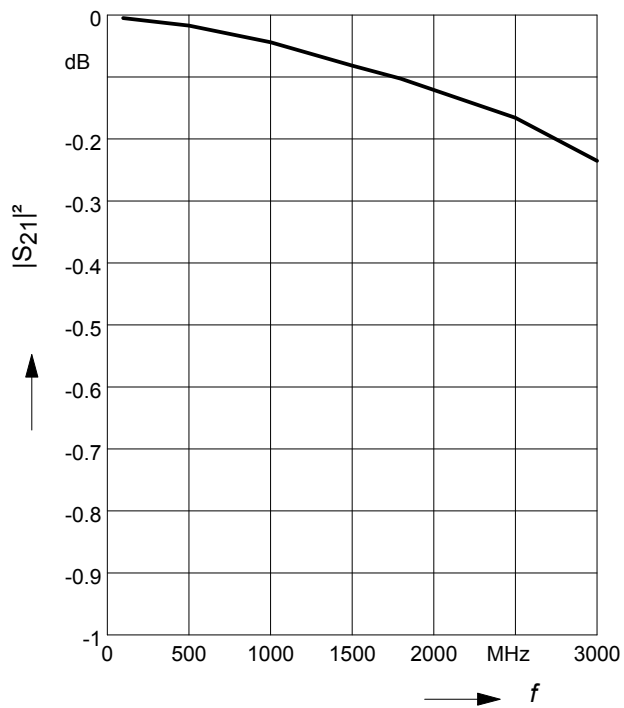


1. Application example ESD0P4RFL

1 RF signal channel, anti-parallel configuration

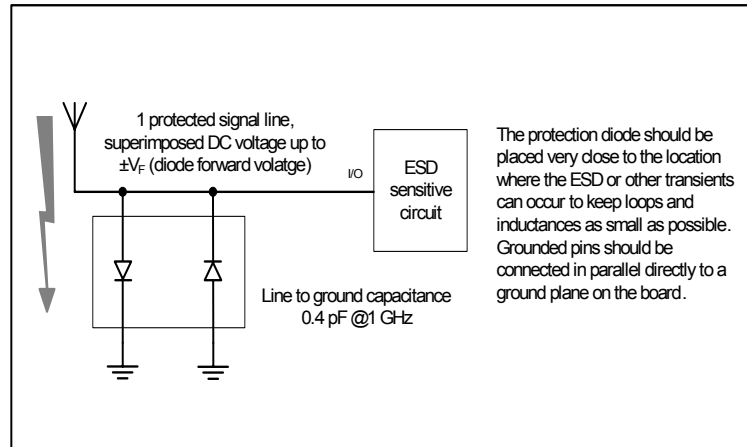

2. Application example ESD0P4RFL

1 RF signal channel, rail-to-rail configuration

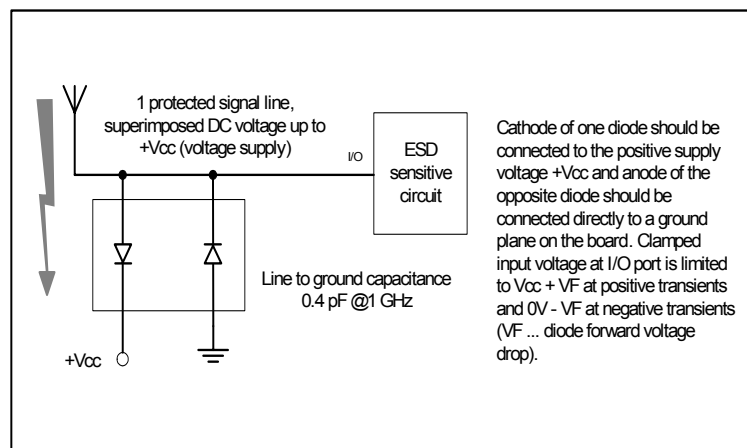

Technical drawing of a 2x2 grid of holes. The drawing includes the following dimensions and labels:

- Top horizontal dimension: 0.8 ± 0.05
- Left horizontal dimension: $4 \times 0.25 \pm 0.035$ with a superscript 1)
- Right vertical dimension: $4 \times 0.35 \pm 0.035$ with a superscript 1)
- Bottom horizontal dimension: 0.45 ± 0.05
- Left vertical dimension: 0.75 ± 0.05
- Right vertical dimension: 1.2 ± 0.05
- Labels 1, 2, 3, and 4 are placed near the holes.

 Stencil apertures

Diagram illustrating the pin 1 marking and type code for the BAR90-07LRH connector. The diagram shows a rectangular connector housing with a circular pin 1 marking and a 'T' symbol. The labels are:

- BAR90-07LRH
Type code
- Pin 1 marking
Laser marking

Pin 1 marking

Edition 2009-11-16

**Published by
Infineon Technologies AG
81726 Munich, Germany**

**© 2009 Infineon Technologies AG
All Rights Reserved.**

Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office ([<www.infineon.com>](http://www.infineon.com)).

Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Infineon:](#)

[ESD0P4RFL E6327](#)