#### Piezo Switch N.O.







PSE 30 RI red

PSE 30 RI green

PSE 30 RI

#### See below:

#### **Approvals and Compliances**

#### **Description**

- Available in version Standard, lettered, with Point Illumination or Ring Illumination
- RGB, RGY: flexible input voltage from 5 28 VDC at constant brightness
- With color combination RGB and RGY
- 7 possible colors with RGB configuration
- 3 possible colors with RGY configuration Assembly by mounting with nut
- Pins, Wire, Crimp Terminal male or Cable with Faston

#### **Unique Selling Proposition**

- Variety of design options regarding size, colour, shape, connection or
- High reliability, long lifetime with more than 20 mill. actuations
- With RGB or RGY ring illumination

#### **Characteristics**

- Housing material types: aluminum or stainless steel, ring illuminated version additionally made of polyamide
- For use in harsh environments, both indoors and outdoors (see technical data)

# Other versions on request

- switch for longer switching signal duration, type: PSE IV
- Switch for explosion proof applications, type: PSE EX
- Switch with enhanced vandal proof protection, type: PSE HI

Alternative: switch vandal improved: PSE HI 22

Alternative: switch for EX proved applications: PSE EX 16; PSE EX 19; PSE EX 22

Alternative: Other diameter PSE NO 16; PSE NO 19; PSE NO 22; PSE NO 24; PSE NO 27

Alternative: switch with prolonged signal: PSE AE 16; PSE AE 30

pdf data sheet, html datasheet, General Product Information, CAD-Drawings, Product News, Detailed request for product, Microsite

# **Technical Data**

Electrical Data	
Switching Function	momentary
Supply Voltage	12 / 24 VDC Ring Illumination 24
	VDC Point Illumination
	5 VDC and 12 VDC variants on request (MOQ 500 pieces)
Supply Voltage RGB	5 - 28 VDC
Switching Voltage	max. 42 / 60 VAC/DC
Switching Current	max. 100 mA
Electrical Rating	1 W
Lifetime	20 million actuations at Rated Switching
	Capacity
Switch Resistance OFF	> 10 MΩ
Switch Resistance ON	$< 20 \Omega$ actuated (Ta = 25°C)
Capacity	5 nF
N.O. Closing Impulse Duration	. 0
	force, time and speed
Contact Configuration	free polarity
RGB Illumination	
Current Consumtion (max per	16.5 mA @ 5 VDC
color)	
	8.2 mA @ 12 VDC
	5.5 mA @ 24 VDC
	4.8 mA @ 28 VDC

Mechanical Data	
Actuating Force	≤ 3 N at ambient temperature
Actuating Travel	0.002 mm
Shock Protection	IK 02
Mounting screw torque	2.5 Nm
Climatical Data	
Operating Temperature	-40 to 85 °C
Storage Temperature	-40 to 85 °C
IP-Protection	IP67 acc. to IEC 60529, IP69K acc. to DIN 40050-9
Environmental Assessment	+55°C / 93% r.h. acc. to DIN EN 60068-2-30
Salt Spray Test (acc. to DIN 50021-SS)	24 h / 48 h / 96 h Residence Time
Material	
Housing (depending on type)	Stainless Steel, Aluminum anodized
Actuating Area / Insert (with Ring Illumination)	Stainless Steel, Aluminum anodized
Illuminated Ring (Ring Illumination)	Polyamide

#### **Approvals and Compliances**

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in Details about Approvals

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

#### **Application standards**

Application standards where the product can be used

Organization	Design	Standard	Description
<u>IEC</u>	Designed for applications acc.	IEC/UL 62368-1	IEC 62368-1 includes the basic requirements for safety of audio, video, information technology and office equipment.


#### **Compliances**

The product complies with following Guide Lines


Identification	Details	Initiator	Description
RoHS	RoHS	SCHURTER AG	Directive RoHS 2011/65/EU, Amendment (EU) 2015/863
REACH	REACH	SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.

# Dimension [mm]

PSE 30 RI

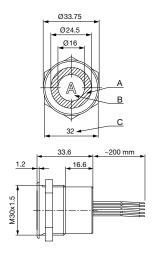

# Design actuating area

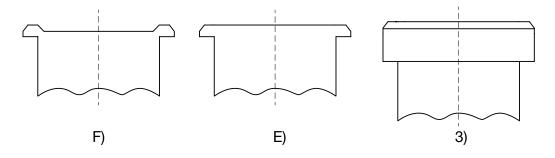

Legend: A = Illumination Area

B = Actuating Area C = Width Across Flats

I = Crimp Terminal male 6.3 x 0.8 PI = Point Illumination


RI = Ring Illumination

- Lettering:
   either with/without lettering
   position of the connections with respect to the position of the lettering is not defined

- F) with finger guidance E) without finger guidance 3) elevated front design: M19 (standard, others on request)

# Dimension


# PSE M30




Drilling diagram

# **Diagrams**


# PSE M24 RI / PSE M27 RI / PSE M30 RI, 12/24 V





- A) Cable 1 (color of the LEDs), Supply voltage first LED group B) Cable 3 (color of the LEDs), Supply voltage second LED group
- C) Cable 2 (black), Common mass of both LED groups
- D) Cable 4 and 5 (white), Input and output PSE switch


# PSE M22 / M30 RI RGY






- A) Cable (color of the LED), Supply voltage
- B) Cable (color of the LED), Supply voltage
- C) Cable (color of the LED), Supply voltage
- D) Cable (black), Common mass
- E) Cable (white), Input and output MCS switch
- F) Cable (white), Input and output MCS switch


# PSE M22 / M24 / M27 / M30 RI RGB






- A) Cable 1 (color of the LED), Supply voltage
- B) Cable 2 (color of the LED), Supply voltage
- C) Cable 3 (color of the LED), Supply voltage
- D) Cable 4 (black), Common mass
- E) Cable 5/6 (white), Input and output PSE switch
- F) Cable 5/6 (white), Input and output PSE switch

#### PSE M24 RI / PSE M27 RI / PSE M30 RI, 5 V





- A) Cable 1 (color of the LEDs), Supply voltage first LED group B) Cable 2 (black), Common mass of both LED groups
- C) Cable 3 (color of the LEDs), Supply voltage second LED group
- D) Cable 4 and 5 (white), Input and output PSE switch

#### Illumination options for RGY


Lighting type	Active terminal A)	Active terminal B)	Active terminal C)	Resulting Color
Multicolor Singlecolor	Α			Red 🛑
Multicolor Singlecolor		В		Green 🛑
Multicolor Singlecolor			С	Yellow —

# Illumination options for RGB

Lighting type	Active terminal A)	Active terminal B)	Active terminal C)	Resulting Color
Multicolor Singlecolor	А			Red 🛑
Multicolor Singlecolor		В		Green 🛑
Multicolor Singlecolor			С	Blue
Multicolor RGB Additive 2	Α	В		Yellow —
Multicolor RGB Additive 2	Α		С	Magenta 🛑
Multicolor RGB Additive 2		В	С	Cyan 🔵
Multicolor RGB Additive 3	Α	В	С	White 🔘

#### Lettering



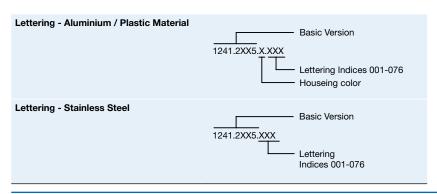

# **Lettering Colour of Laser Lettering**

Material	Lettering Colour		
Stainless Steel	black	Filled letters	
Aluminum natural anodized	light grey	Filled letters	(only after customer approval)
Aluminum coloured anodized	light grey	Filled letters	

# **Order Index Lettering**

Laser Marking         001 =A       021 =U       041 =÷       061 =EIN         002 =B       022 =V       042 = *       062 =AUS         003 =C       023 =W       043 ==       063 =AUF         004 =D       024 =X       044 = #       064 =AB         005 =E       025 =Y       045 = +       065 =ON         006 =F       026 =Z       046 = ‡       066 =OFF         007 =G       027 =0       047 = →       067 =UP         008 =H       028 =1       048 = ←       068 =DOWN         009 =I       029 =2       049 = ↓       069 =HIGH         010 =J       030 =3       050 = †       070 =LOW         011 =K       031 =4       051 = %       071 =ON/OFF         012 =L       032 =5       052 = √       072 =START         013 =M       033 =6       053 =CTRL       073 =RESET         014 =N       034 =7       054 =RETURN       074 = ᠿ         015 =O       035 =8       055 =SHIFT       075 = ☆         016 =P       036 =9       056 =LOCK       076 = 戶         017 =Q       037 =+       057 =STOP       077 = ⊕         018 =R       038 =-       059 =BACK		•		
002 = B	Laser Marking			
003 = C	001 = <b>A</b>	021 = <b>U</b>	041 =÷	061 = <b>EIN</b>
004 = D 024 = X 044 = # 064 = AB 005 = E 025 = Y 045 = ↔ 065 = ON 006 = F 026 = Z 046 = ‡ 066 = OFF 007 = G 027 = O 047 = → 067 = UP 008 = H 028 = 1 048 = ← 068 = DOWN 009 = I 029 = 2 049 = ↓ 069 = HIGH 010 = J 030 = 3 050 = ↑ 070 = LOW 011 = K 031 = 4 051 = % 071 = ON/OFF 012 = L 032 = 5 052 = √ 072 = START 013 = M 033 = 6 053 = CTRL 073 = RESET 014 = N 034 = 7 054 = RETURN 074 = Ů 015 = O 035 = 8 055 = SHIFT 075 = ∜ 016 = P 036 = 9 056 = LOCK 076 = △ 017 = Q 037 = + 057 = STOP 077 = ① 018 = R 038 = 059 = BACK	002 = <b>B</b>	022 = <b>V</b>	042 = *	062 = <b>AUS</b>
005 = E	003 = <b>C</b>	023 = <b>W</b>	043 = <b>=</b>	063 = <b>AUF</b>
006 = F	004 = <b>D</b>	024 = <b>X</b>	044 = #	064 = <b>AB</b>
007 = G	005 = <b>E</b>	025 = <b>Y</b>	045 = ↔	065 = <b>ON</b>
008 = H 028 = 1 048 = ← 068 = DOWN 009 = I 029 = 2 049 = ↓ 069 = HIGH 010 = J 030 = 3 050 = ↑ 070 = LOW 011 = K 031 = 4 051 = % 071 = ON/OFF 012 = L 032 = 5 052 = √ 072 = START 013 = M 033 = 6 053 = CTRL 073 = RESET 014 = N 034 = 7 054 = RETURN 074 = $\bigcirc$ 075 = $\bigcirc$ 076 = $\bigcirc$ 015 = O 035 = 8 055 = SHIFT 075 = $\bigcirc$ 076 = $\bigcirc$ 017 = Q 037 = + 057 = STOP 077 = $\bigcirc$ 077 = $\bigcirc$ 018 = R 038 = - 058 = ENTER 019 = S 039 = .	006 = <b>F</b>	026 = <b>Z</b>	046 = \$	066 = <b>OFF</b>
009 =I 029 =2 049 = ↓ 069 =HIGH  010 =J 030 =3 050 = ↑ 070 =LOW  011 =K 031 =4 051 = % 071 =ON/OFF  012 =L 032 =5 052 = √ 072 =START  013 =M 033 =6 053 =CTRL 073 =RESET  014 =N 034 =7 054 =RETURN 074 = $\bigcirc$ 075 = $\bigcirc$ 076 = $\bigcirc$ 015 =O 035 =8 055 =SHIFT 075 = $\bigcirc$ 076 = $\bigcirc$ 017 =Q 037 =+ 057 =STOP 077 = $\bigcirc$ 077 = $\bigcirc$ 018 =R 038 =- 058 =ENTER  019 =S 030 =3 050 = $\bigcirc$ 059 =BACK	007 = <b>G</b>	027 = <b>0</b>	047 = →	067 = <b>UP</b>
010 = J       030 = 3       050 = ↑       070 = LOW         011 = K       031 = 4       051 = %       071 = ON/OFF         012 = L       032 = 5       052 = $\sqrt{}$ 072 = START         013 = M       033 = 6       053 = CTRL       073 = RESET         014 = N       034 = 7       054 = RETURN       074 = $\sqrt{}$ 015 = O       035 = 8       055 = SHIFT       075 = $\sqrt[3]{}$ 016 = P       036 = 9       056 = LOCK       076 = $\sqrt[3]{}$ 017 = Q       037 = +       057 = STOP       077 = $$ 018 = R       038 = -       058 = ENTER         019 = S       039 = .       059 = BACK	008 = <b>H</b>	028 = <b>1</b>	048 = ←	068 = <b>DOWN</b>
011 = K 031 = 4 051 = % 071 = ON/OFF 012 = L 032 = 5 052 = $\sqrt{}$ 072 = START 013 = M 033 = 6 053 = CTRL 073 = RESET 014 = N 034 = 7 054 = RETURN 074 = $\sqrt{}$ 075 = $\sqrt{}$ 015 = O 035 = 8 055 = SHIFT 075 = $\sqrt{}$ 016 = P 036 = 9 056 = LOCK 076 = $\sqrt{}$ 017 = Q 037 = + 057 = STOP 077 = $\sqrt{}$ 018 = R 038 = 059 = BACK	009 = <b>I</b>	029 = <b>2</b>	049 = ↓	069 = <b>HIGH</b>
012 = L 032 = 5 052 = $$ 072 = START 013 = M 033 = 6 053 = CTRL 073 = RESET 014 = N 034 = 7 054 = RETURN 074 = $$ 075 = $$ 015 = O 035 = 8 055 = SHIFT 075 = $$ 016 = P 036 = 9 056 = LOCK 076 = $$ 017 = Q 037 = + 057 = STOP 077 = $$ 018 = R 038 = 058 = ENTER 019 = S 039 = .	010 = <b>J</b>	030 = <b>3</b>	050 = ↑	070 = <b>LOW</b>
013 = M 033 = 6 053 = CTRL 073 = RESET  014 = N 034 = 7 054 = RETURN 074 = ()  015 = O 035 = 8 055 = SHIFT 075 = ◇  016 = P 036 = 9 056 = LOCK 076 = △  017 = Q 037 = + 057 = STOP 077 = ①  018 = R 038 = 058 = ENTER  019 = S 039 = 059 = BACK	011 = <b>K</b>	031 = <b>4</b>	051 = %	071 = <b>ON/OFF</b>
014 = N 034 = 7 054 = RETURN 074 = Û 015 = O 035 = 8 055 = SHIFT 075 = ❖ 016 = P 036 = 9 056 = LOCK 076 = △ 017 = Q 037 = + 057 = STOP 077 = Û 018 = R 038 = - 058 = ENTER 019 = S 039 = . 059 = BACK	012 = <b>L</b>	032 = <b>5</b>	052 = √	072 = <b>START</b>
015 = <b>O</b> 035 = <b>8</b> 055 = <b>SHIFT</b> 075 = ♦ ♦ 016 = <b>P</b> 036 = <b>9</b> 056 = <b>LOCK</b> 076 = ♠ 017 = <b>Q</b> 037 = + 057 = <b>STOP</b> 077 = ♠ 018 = <b>R</b> 038 = - 058 = <b>ENTER</b> 019 = <b>S</b> 039 = . 059 = <b>BACK</b>	013 = <b>M</b>	033 = <b>6</b>	053 = CTRL	073 = <b>RESET</b>
016 = P 036 = 9 056 = LOCK 076 = △ 017 = Q 037 = + 057 = STOP 077 = ① 018 = R 038 = - 058 = ENTER 019 = S 039 = . 059 = BACK	014 = <b>N</b>	034 = <b>7</b>	054 = <b>RETURN</b>	074 = (1)
017 = <b>Q</b> 037 = + 057 = <b>STOP</b> 077 = <b>①</b> 018 = <b>R</b> 038 = - 058 = <b>ENTER</b> 019 = <b>S</b> 039 = . 059 = <b>BACK</b>	015 = <b>O</b>	035 = <b>8</b>	055 = <b>SHIFT</b>	075 =☆
018 = <b>R</b> 038 = - 058 = <b>ENTER</b> 019 = <b>S</b> 039 = . 059 = <b>BACK</b>	016 = <b>P</b>	036 = <b>9</b>	056 = <b>LOCK</b>	076 =△
019 = <b>S</b> 039 = <b>.</b> 059 = <b>BACK</b>	017 = <b>Q</b>	037 =+	057 = <b>STOP</b>	077 =
	018 = <b>R</b>	038 =-	058 = <b>ENTER</b>	
020 = T $040 = x$ $060 = LINE$	019 = <b>S</b>	039 =.	059 = <b>BACK</b>	
	020 = <b>T</b>	040 = x	060 = <b>LINE</b>	

#### **All Variants**

Mounting Diameter	Terminal	Housing Material, Torsion Protection	Colour of Housing	Actuator area	Illumination, LED	Config. Code	Order Number
30	Flexible wire	Aluminum ,no	Alu natural	F	RI dotted, blue, 24 VDC	PSE M 30 NO RI	1241.3189
30	Flexible wire	Aluminum ,no	Alu natural	F	RI dotted, red / green, 24 VDC	PSE M 30 NO RI	1241.3012
30	Flexible wire	Stainless Steel ,no	-	E	RI dotted, blue, 24 VDC	PSE M 30 NO RI	1241.3237
30	Flexible wire	Stainless Steel ,no	-	F	RI dotted, blue, 24 VDC	PSE M 30 NO RI	1241.3548
30	Flexible wire	Stainless Steel ,no	-	F	RI dotted, red / green, 24 VDC	PSE M 30 NO RI	1241.3057

Mounting Diameter	Terminal	Housing Material, Torsion Protection	Colour of Housing	Actuator area	Illumination, LED	Config. Code	Order Number	
30	Flexible wire	Aluminum ,no	Alu natural	F	RI homogeneous, RGB, 5 - 28 VDC	PSE M 30 NO RI	1241.3667	
30	Flexible wire	Aluminum ,no	Alu natural	F	RI homogeneous, RGY, 5 - 28 VDC	PSE M 30 NO RI	1241.3668	
30	Flexible wire	Stainless Steel ,no	-	E	RI homogeneous, RGB, 5 - 28 VDC	PSE M 30 NO RI	1241.3670	

Nut with gasket are enclosed in the box.

Other mounting diameters, materials, colors, connections, supply voltages possible available on request. Special materials e.g. Marine grade stainless steel for use in salt and chlorinated environment on request.

The MOQ for standard laser lettering on standard variants is 10 pieces.

5 VDC and 12 VDC variants on request (MOQ 500 pieces)

Most Popular.

Availability for all products can be searched real-time:https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER

Legend:

Type: PSE

NO = normaly open

IV = prolonged signal

RU = PI = Point Illumination

RI = Ring Illumination

LE = Lettered

K = Plastics

Alu = Aluminium

ES = Stainless steel

F = Finger guidance

E = without finger guidance

#### Packaging unit

10 in box with insert or packed in air cushion bags





- Actuating elements in ESD safe packaging
- Screw nuts and sealing rings in a bag (enclosd in the box)

#### **Accessories**

#### Description



Connecting Terminal PSE Connecting Terminal



Power Supply Power Supply IP42 for LED- and Illumination applications indoor 90~264 VAC => 24 VDC 0.34 A 8 W

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

# Schurter:

<u>1241.3012</u> <u>1241.3057</u> <u>1241.3189</u> <u>1241.3197</u> <u>1241.3034.M</u> <u>1241.3237</u> <u>1241.3033.M</u> <u>1241.3667</u> <u>1241.3668</u> 1241.3670