


REV	ECN NO	REVISIONS	DRN	CKD	APP	DATE
Α		NEW RELEASE	TWC			


* DENOTES CRITICAL DIMENSION OR SPECIFICATION




DETAIL A SCALE 4.000



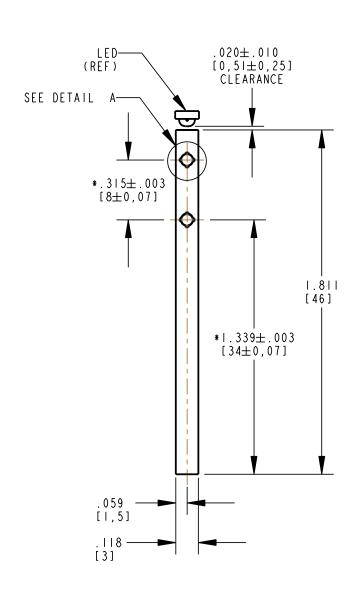

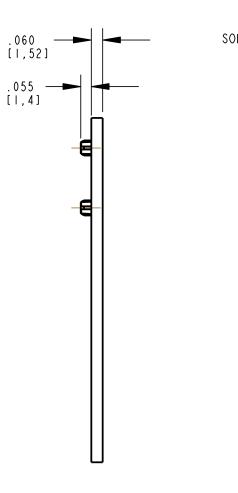

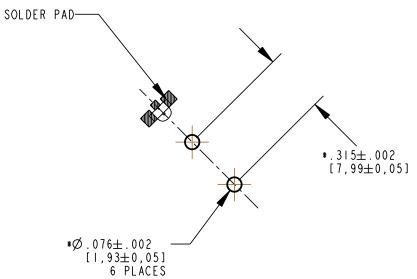

RECOMMENDED HOLE PATTERN LAYOUT FOR I POSITION STRAIGHT LIGHTPIPE 515-1154F

RoHS Compliant 515-1154F Lightpipe


83330

FSCM

Part Numbers with the "F" suffix ending are RoHS Compliant. Packaging is marked with "RoHS Compliant" label or equivalent markings.

SHEET

- I. COMPONENT MOLDED IN A CLEAR TRANMISSIVE POLYCARBONATE, UL 94V-0 GRADE.
- 2. COMPONENT DESIGNED TO BE PRESSED INTO P.C. BOARD.
- 3. DIALIGHT LIGHTPIPE PART NUMBER: 515-1154F
- 4. RECOMMENDED LIGHT SOURCE:RT.ANGLE 1208 PKG (.120 X .080 X .040" HIGH)
 5. 597-2751-602F FOR 20 PC SAMPLE STRIP, -607F FOR FULL REEL R/G BI-COLOR
 597-2712-602F FOR 20 PC SAMPLE STRIP, -607F FOR FULL REEL R/G/B TRI-COLOR
- 6. ALL SURFACES ARE POLISHED WITH EXCEPTION OF PRESS FIT PINS.

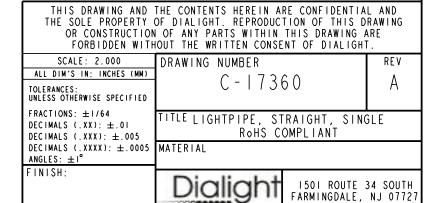

I OF I FAMILY TABLE:

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

<u>Dialight:</u> 515-1154F