
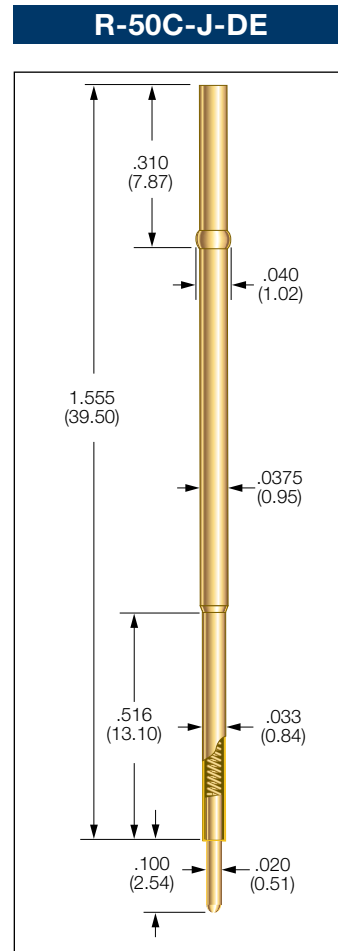
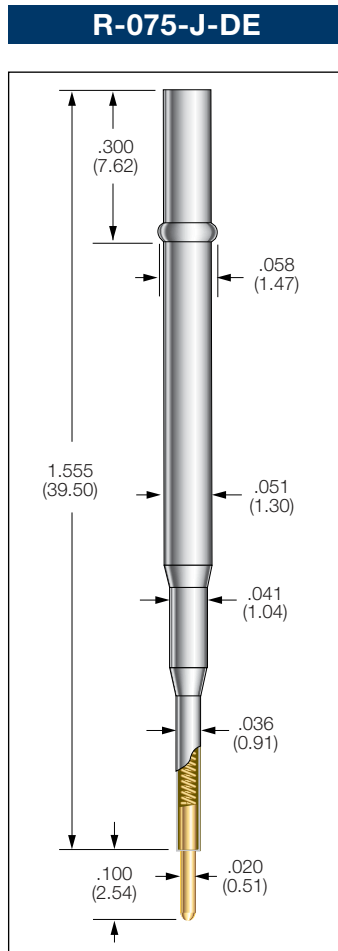
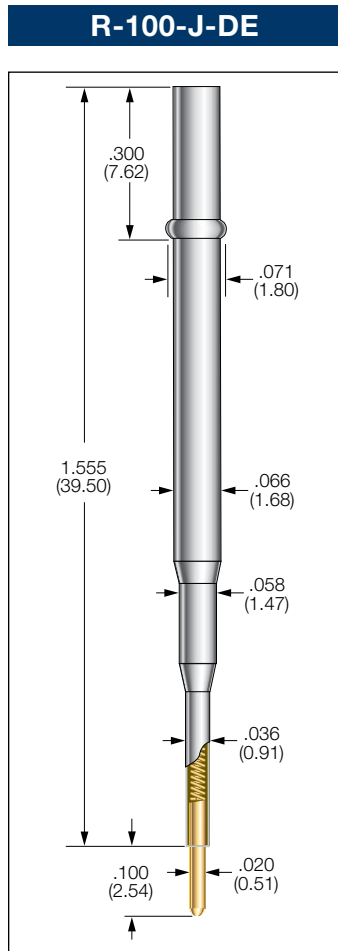


Wireless Receptacles

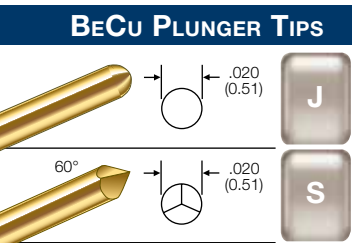

PROBE SPECIFICATIONS

Minimum Centers: .100 (2.54)
Drill Size: #50
Mounting Hole Size: .068/.070 (1.73/1.78)
Spring Force: 2.7 oz. (77g)
 @ .070 (1.77) travel

MATERIALS

Receptacle: Nickel/silver, gold lined inside
Spring: Music wire, gold plated
Plunger: Beryllium copper, gold plated over nickel
R-100-DE: Uses ICT-100, S-100 or ICT-L100 probe

PROBE SPECIFICATIONS

Minimum Centers: .075 (1.91)
Drill Size: 1.45mm
Mounting Hole Size: .055/.057 (1.40/1.45)
Spring Force: 2.7 oz. (77g)
 @ .070 (1.77) travel

MATERIALS

Receptacle: Nickel/silver, gold lined inside
Spring: Music wire, gold plated
Plunger: Beryllium copper, gold plated over nickel
R-075-DE: Uses ICT-075, S-075 or ICT-L075 probe

PROBE SPECIFICATIONS

Minimum Centers: .050 (1.27)
Drill Size: #61
Mounting Hole Size: .0385/.0390 (0.98/0.99)
Spring Force: 2.7 oz. (77g)
 @ .070 (1.77) travel

MATERIALS

Receptacle: Beryllium copper, gold plated
Spring: Music wire, gold plated
Plunger: Beryllium copper, gold plated over nickel
R-50C-DE: Uses ICT-50C or S-50C probe

HOW TO ORDER:			
R	100	J	DE
SERIES	SIZE	TIP STYLE	TERMINATION

HOW TO ORDER:			
R	075	J	DE
SERIES	SIZE	TIP STYLE	TERMINATION

HOW TO ORDER:			
R	50C	J	DE
SERIES	SIZE	TIP STYLE	TERMINATION

Specifications subject to change without notice. Dimensions in inches (millimeters)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Smiths Interconnect:

[R-100-J-DE](#) [R-075-B-DE](#) [R-075-S-DE](#) [R-075-U-DE](#) [R-50C-B-DE](#) [R-50C-S-DE](#) [R-50C-U-DE](#) [R-075-J-DE](#) [R-50C-J-](#)
[DE](#) [R-100-S-DE](#) [R-100-B-DE](#) [R-100-U-DE](#) [R-50C-WW-025](#) [R-50C-WW-016](#) [R-50C-SC](#)