
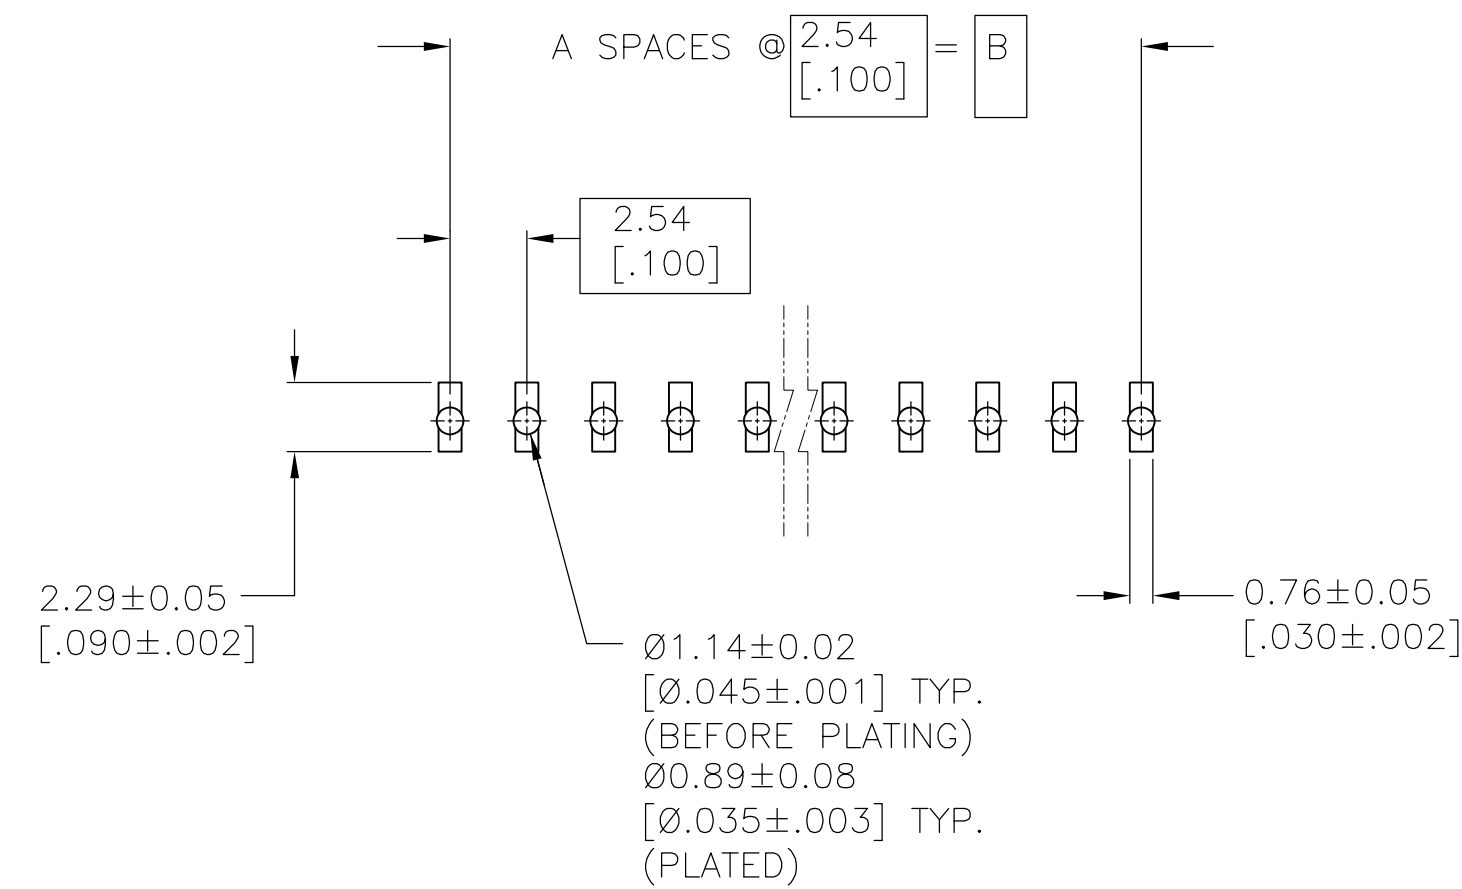



- 1 ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS.
- 2 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN,
THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD.
- 3 0.00254-0.00504 [.000100-.000200] MATTE TIN-LEAD ON SOLDER TAIL,
ALL OVER 0.00127 [.000050] NICKEL.
- 4 HOUSING: LCP, COLOR-BLACK.
POSTS: COPPER ALLOY.
- 5 0.00254-0.00504 [.000100-.000200] MATTE TIN ON SOLDER TAIL,
ALL OVER 0.00127 [.000050] NICKEL.
- 6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI.

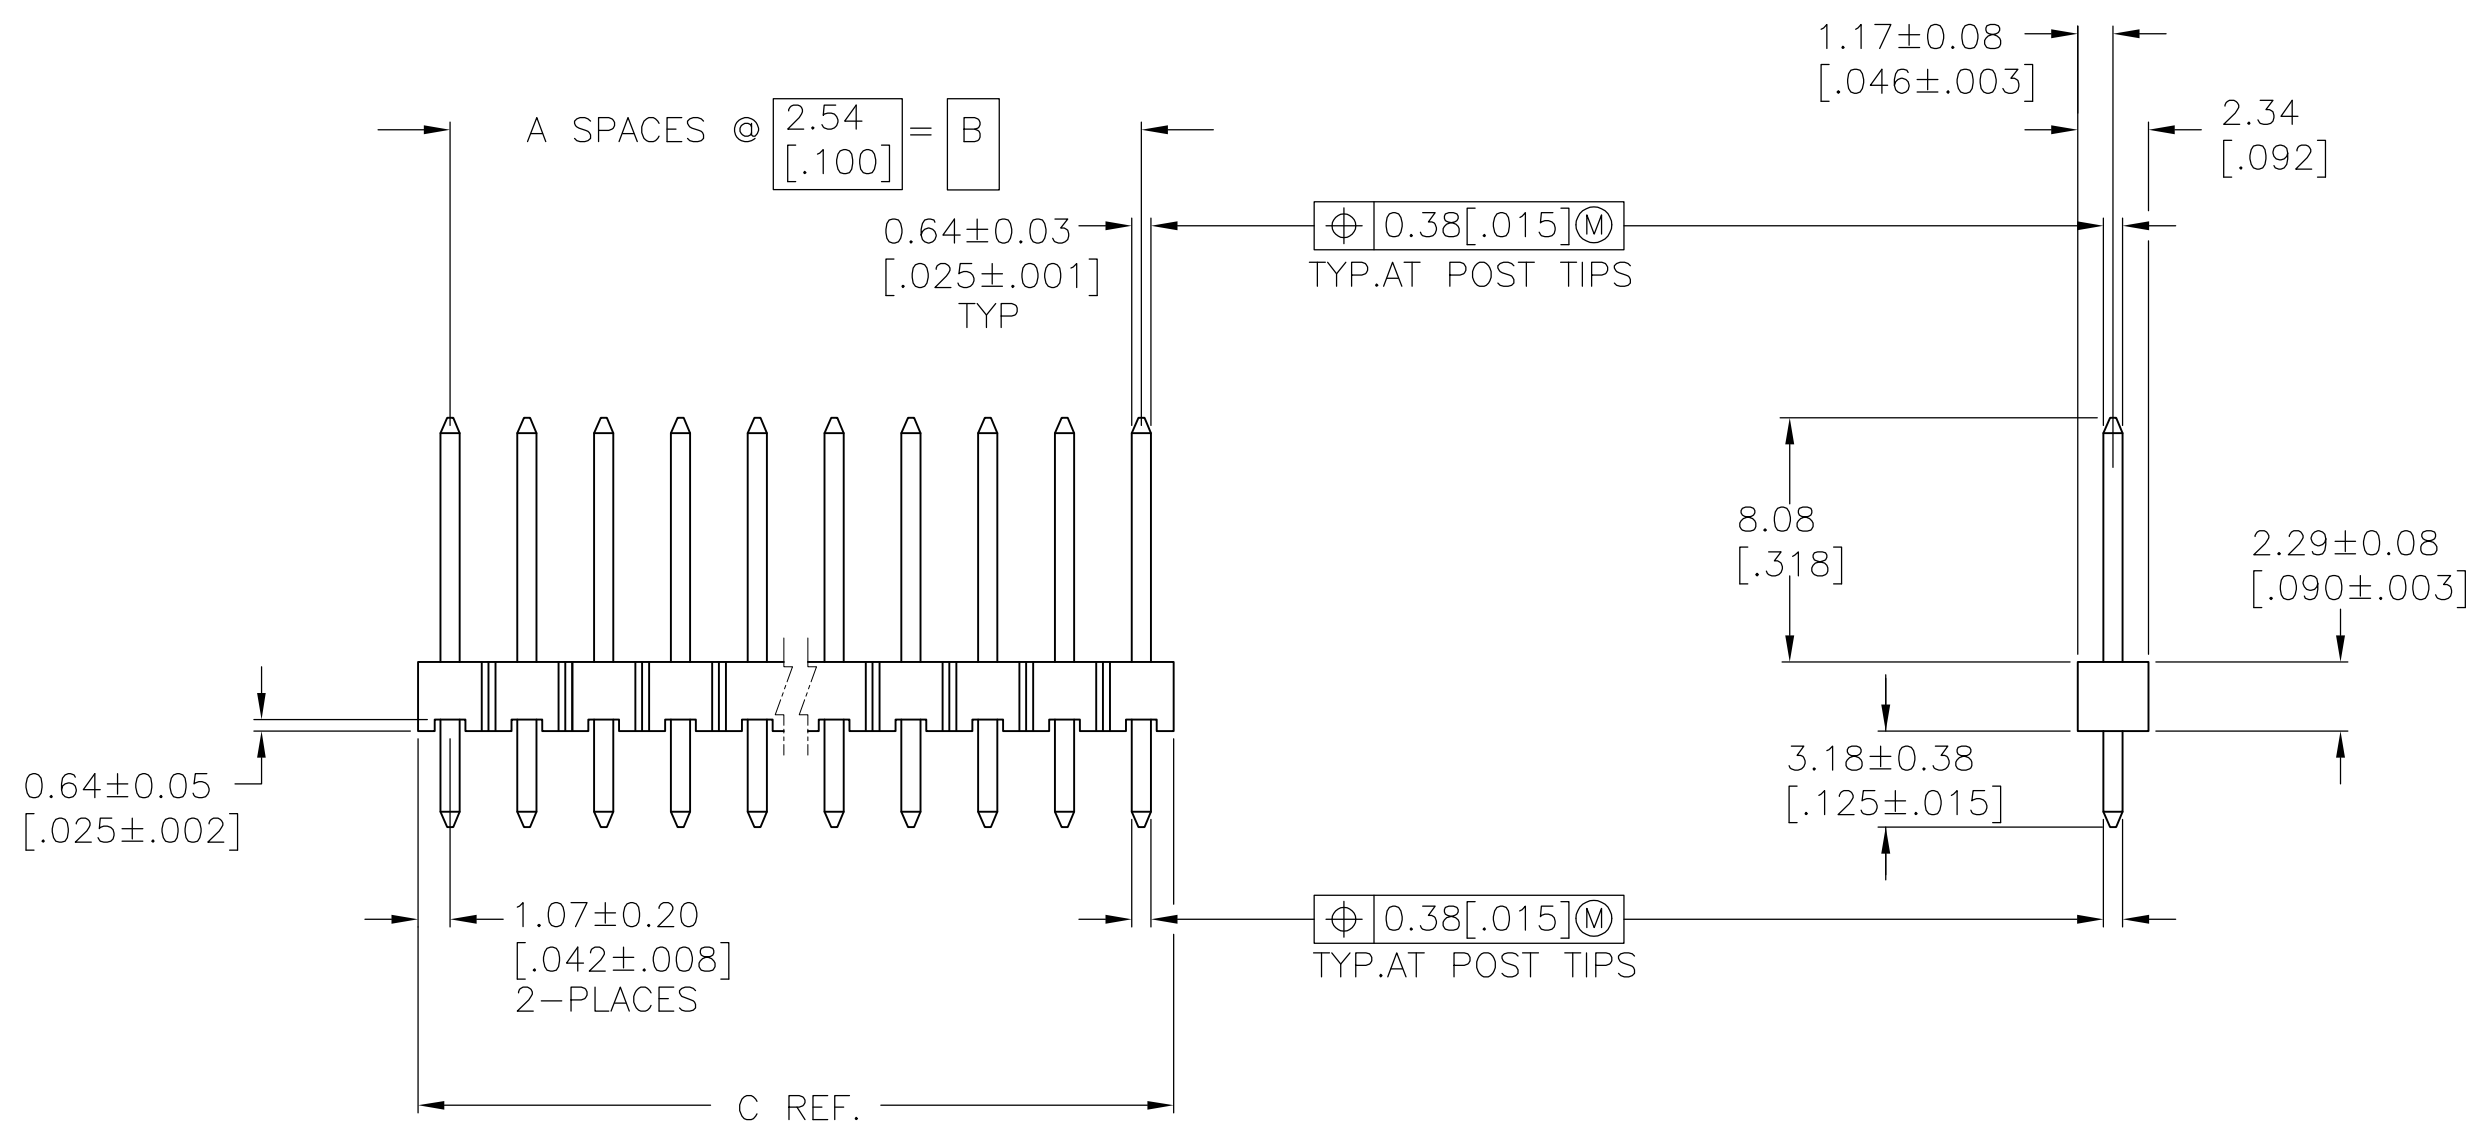

RECOMMENDED PC BOARD MOUNTING DIMENSIONS
FOR .063 [1.60] THICK PC BOARD AND
.012 [.305] STENCIL THICK.

			101.19 [3.984]	99.06 [3.900]	39	40	9-146274-0
OBSOLETE			98.65 [3.884]	96.52 [3.800]	38	39	8-146274-9
			96.11 [3.784]	93.98 [3.700]	37	38	8-146274-8
			93.57 [3.684]	91.44 [3.600]	36	37	8-146274-7
OBSOLETE			91.03 [3.584]	88.90 [3.500]	35	36	8-146274-6
			88.49 [3.484]	86.36 [3.400]	34	35	8-146274-5
			85.95 [3.384]	83.82 [3.300]	33	34	8-146274-4
			83.41 [3.284]	81.28 [3.200]	32	33	8-146274-3
			80.87 [3.184]	78.74 [3.100]	31	32	8-146274-2
			78.33 [3.084]	76.20 [3.000]	30	31	8-146274-1
			75.79 [2.984]	73.66 [2.900]	29	30	8-146274-0
			73.25 [2.884]	71.12 [2.800]	28	29	7-146274-9
			70.71 [2.784]	68.58 [2.700]	27	28	7-146274-8
	OBSOLETE			68.17 [2.684]	66.04 [2.600]	26	27
			65.63 [2.584]	63.5 [2.500]	25	26	7-146274-6
			63.09 [2.484]	60.96 [2.400]	24	25	7-146274-5
OBSOLETE			60.55 [2.384]	58.42 [2.300]	23	24	7-146274-4
			58.01 [2.284]	55.88 [2.200]	22	23	7-146274-3
			55.47 [2.184]	53.34 [2.100]	21	22	7-146274-2
OBSOLETE			52.93 [2.084]	50.80 [2.000]	20	21	7-146274-1
			50.39 [1.984]	48.26 [1.900]	19	20	7-146274-0
	OBSOLETE	△5	47.85 [1.884]	45.72 [1.800]	18	19	6-146274-9
45.31 [1.784]			43.18 [1.700]	17	18	6-146274-8	
42.77 [1.684]			40.64 [1.600]	16	17	6-146274-7	
40.23 [1.584]			38.10 [1.500]	15	16	6-146274-6	
37.69 [1.484]			35.56 [1.400]	14	15	6-146274-5	
35.15 [1.384]			33.02 [1.300]	13	14	6-146274-4	
32.61 [1.284]			30.48 [1.200]	12	13	6-146274-3	
30.07 [1.184]			27.94 [1.100]	11	12	6-146274-2	
27.53 [1.084]			25.40 [1.000]	10	11	6-146274-1	
				24.99 [.984]	22.86 [.900]	9	10
OBSOLETE			22.45 [.884]	20.32 [.800]	8	9	5-146274-9
			19.91 [.784]	17.78 [.700]	7	8	5-146274-8
			17.37 [.684]	15.24 [.600]	6	7	5-146274-7
			14.83 [.584]	12.70 [.500]	5	6	5-146274-6
			12.29 [.484]	10.16 [.400]	4	5	5-146274-5
			9.75 [.384]	7.62 [.300]	3	4	5-146274-4
			7.21 [.284]	5.08 [.200]	2	3	5-146274-3
			4.67 [.184]	2.54 [.100]	1	2	5-146274-2
			2.13 [.084]	- [-]	0	1	5-146274-1
	PLATING	C	B	A	NO. OF POSITIONS	PART NUMBER	

[illegible]

THIS DRAWING IS A CONTROLLED DOCUMENT.						DWN G. HOFFMAN		6/12/95		 TE Connectivity	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK G. DUBNICZKI		6/29/95		NAME		HEADER ASSEMBLY, MOD II, BREAKAWAY, SINGLE ROW, HIGH TEMPERATURE, VERTICAL	
		0 P/LC ± — 1 P/LC ± — 2 P/LC ± 0.51[.02] 3 P/LC ± 0.127[.005] ANGLES ± 0.5°[.1°] (0.005) FINISH		APPROV G. DUBNICZKI		6/29/95		PRODUCT SPEC			
		APPLICATION SPEC									
MATERIAL		SEE TABLE		WEIGHT	—	SIZE	A1	CAGE CODE	00779	DRAWING NO	C-146274
				CUSTOMER DRAWING				RESTRICTED TO —			
				SCALE				4:1 SHEET 1 OF 1 REV H			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-146274-6](#)