


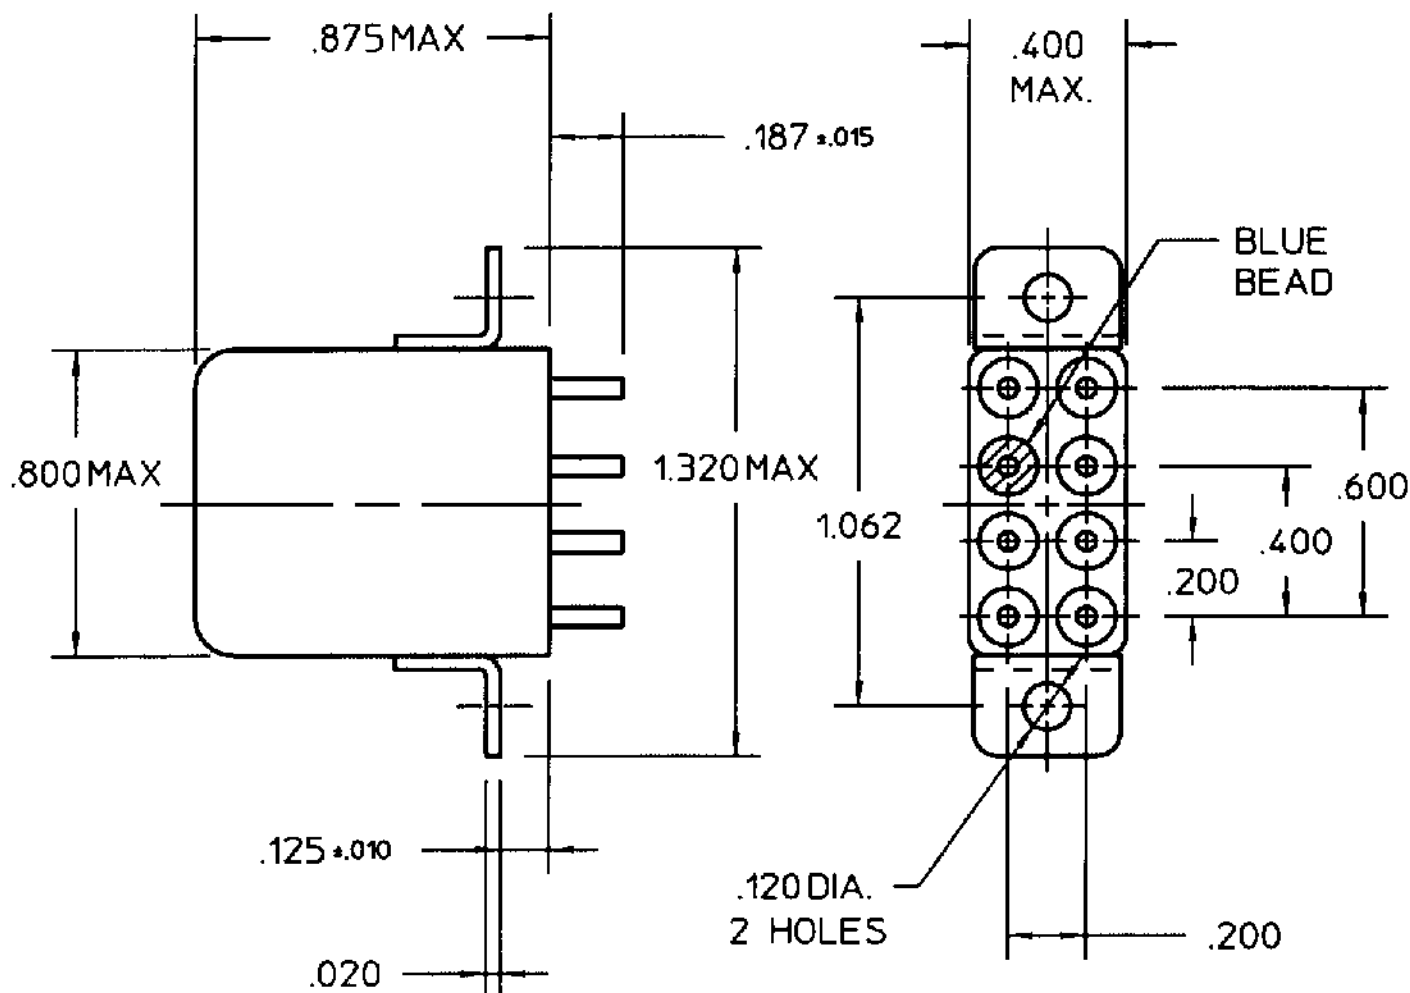


COIL: @ 25°C
 RESISTANCE 675 OHMS ± 10%
 NOMINAL VOLTAGE 26.5 VDC
 MUST OPERATE 13.5 VDC
 MUST RELEASE 1.47 VDC

ENVIRONMENT:
 VIBRATION 10 CPS TO 2000 CPS @ 20 g's
 SHOCK 100 g's 6 ± 1 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES:

CUSTOMER DATA SHEET

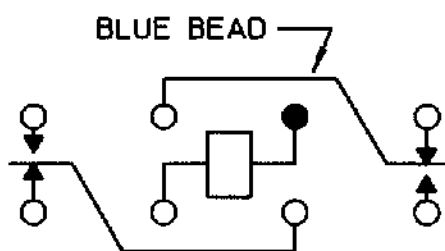

CONTACT RATING: 5 AMPS 28 VDC
 RESISTIVE 100,000 OPERATIONS

DR. R.B. 11/11/93 CK. V/1/23 JAB

COMMUNICATIONS
INSTRUMENTS, INC.

CUST. C. I. I. STD.
 CUST. NO.

TYPE 'FW' RELAY

FW5A1220G00

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[FW5A1220E00](#) [FW5A1220G00](#)