

FEATURES

- Patent Protected
- UL 60950 Recognised
- Footprint over pins 0.69cm²
- Single & dual isolated output
- 1kVDC Isolation “Hi Pot Test”
- Efficiency up to 85% (Typ.)
- MSL Level 1
- Power density 3.403W/cm³
- 3.3V, 5V, 12V & 24V Input
- 5V, 12V & 24V single & dual outputs
- Custom solutions available
- Multi-layer ceramic capacitors

PRODUCT OVERVIEW

The MTU2 series is a new range of miniature surface mount, high performance 2W DC-DC converters. With a footprint reduction of over 50% from the previous generations of 2W SMD DC-DC, the MTU2 series offers 2W of available output power over a wide temperature range. The MTU2 series is more efficient and offers improved regulation performance for applications where a wide output voltage variation can not be tolerated. The MTU2 series is pin compatible with the MTU2 series.

The devices are suitable for all applications where high volume production is envisaged.

SELECTION GUIDE

Order Code ¹	Nominal Input Voltage	Output Voltage	Output Current	Load Regulation (Typ.)	Load Regulation (Max)	Ripple & Noise (Typ.) ³	Ripple & Noise (Max.) ³	Input Current at Full Load	Efficiency (Min.)	Efficiency (Typ.)	Isolation Capacitance	MTTF ²
	V	V	mA	%	%	mVp-p	mVp-p	mA	%	%	pF	kHrs
MTU2S0305MC	3.3	5	400	12.5	15	53	75	740	74	79	15	2650
MTU2S0505MC	5	5	400	9.5	12	47	65	480	78	82	17	2763
MTU2S0524MC	5	24	83	9	11	14	30	460	79	85	18	3060
MTU2S1205MC	12	5	400	7.5	10	40	60	200	72	80	20	2207
MTU2S2405MC	24	5	400	8	10	30	50	100	73	80	21	2314
MTU2D0505MC	5	±5	±200	10.5	13	30	55	480	77	82	19	2898
MTU2D0512MC	5	±12	±83	8.5	11	15	35	460	79	85	19	2697
MTU2D1212MC	12	±12	±83	6.5	8	15	35	190	77	83	24	2452

INPUT CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Voltage range	Continuous operation, 3.3V input types	2.97	3.3	3.63	V
	Continuous operation, 5V input types	4.5	5.0	5.5	
	Continuous operation, 12V input types	10.8	12.0	13.2	
	Continuous operation, 24V input types	21.6	24	26.4	
Reflected ripple current	All variants		10		mA p-p

ISOLATION CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation voltage	Flash tested for 1 minute	1000			VDC
Resistance	Viso= 1000VDC	10			GΩ

OUTPUT CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Rated power	T _A =-40°C to 85°C			2.0	W
Voltage set point accuracy	See tolerance envelope				
Line regulation	High V _{in} to low V _{in}		1.0	1.3	%/%
			1.0	1.2	

GENERAL CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Switching frequency	MTU2D0505MC		50		kHz
	All other variants		70		

ABSOLUTE MAXIMUM RATINGS

Input voltage V _{in} , MTU2S03 types	5.5V
Input voltage V _{in} , MTU2S05 types	7V
Input voltage V _{in} , MTU2S12 types	15V
Input voltage V _{in} , MTU2S24 types	28V



For full details go to www.murata-ps.com/rohs



1. If components are required in tape and reel format suffix order code with -R, e.g. MTU20505MC-R.
 2. Calculated using MIL-HDBK-217 FN2 calculation model with nominal input voltage at full load.
 3. See ripple & noise characterisation method.
- All specifications typical at T_A=25°C, nominal input voltage and rated output current unless otherwise specified.

TEMPERATURE CHARACTERISTICS					
Parameter	Conditions	Min.	Typ.	Max.	Units
Specification	All output types	-40		85	°C
Storage		-50		125	
Case temperature rise above ambient ¹	0305, 1205, 2405		30	45	
	All other variants		25	35	
Cooling	Free air convection				

1 . Measured after 1 hour continuous operation at nominal V_{IN} full load at the center of each PCB.

APPLICATION NOTES

Minimum load


The minimum load to meet datasheet specification is 10% of the full rated load across the specified input voltage range. Lower than 10% minimum loading will result in an increase in output voltage, which may rise to typically double the specified output voltage if the output load falls to less than 5%.

Capacitive loading and start up

Typical start up times for this series, with a typical input voltage rise time of 2.2µs and output capacitance of 10µF, are shown in the table below. The product series will start into a capacitance of 47µF with an increased start time, however, the maximum recommended output capacitance is 10µF.

	Start-up time	
	µs	
MTU2S0305MC	225	
MTU2S0505MC	165	
MTU2S0524MC	3900	
MTU2S1205MC	90	
MTU2S2405MC	90	
MTU2D0505MC	200	
MTU2D0512MC	880	
MTU2D1212MC	390	

Typical Start-Up Wave Form

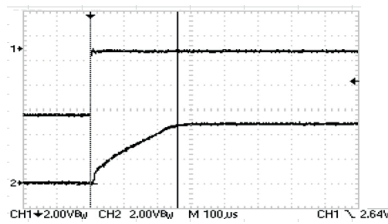


Ripple & Noise Characterisation Method

Ripple and noise measurements are performed with the following test configuration.

C1	1µF X7R multilayer ceramic capacitor, voltage rating to be a minimum of 3 times the output voltage of the DC-DC converter
C2	10µF tantalum capacitor, voltage rating to be a minimum of 1.5 times the output voltage of the DC-DC converter with an ESR of less than 100mΩ at 100 kHz
C3	100nF multilayer ceramic capacitor, general purpose
R1	450Ω resistor, carbon film, ±1% tolerance
R2	50Ω BNC termination
T1	3T of the coax cable through a ferrite toroid
RLOAD	Resistive load to the maximum power rating of the DC-DC converter. Connections should be made via twisted wires
Measured values are multiplied by 10 to ot	

Differential Mode Noise Test Schematic

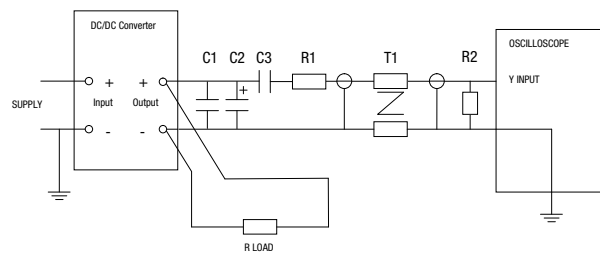

APPLICATION NOTES CONTINUED

Output Ripple Reduction


By using the values of inductance and capacitance stated, the output ripple at the rated load is lowered to 5mV p-p max.

Component selection

Capacitor: It is required that the ESR (Equivalent Series Resistance) should be as low as possible, ceramic types are recommended. The voltage rating should be at least twice (except for 15V output), the rated output voltage of the DC-DC converter.

Inductor: The rated current of the inductor should not be less than that of the output of the DC-DC converter. At the rated current, the DC resistance of the inductor should be such that the voltage drop across the inductor is <2% of the rated voltage of the DC-DC converter. The SRF (Self Resonant Frequency) should be >20MHz.


	Inductor			Capacitor
	L, μ H	SMD	Through Hole	C, μ F
MTU2S0305MC	4.7	82472C	11R472C	22
MTU2S0505MC	4.7	82472C	11R472C	22
MTU2S0524MC	47	82473C	11R473C	4.7
MTU2S1205MC	4.7	82472C	11R472C	22
MTU2S2405MC	4.7	82472C	11R472C	10
MTU2D0505MC	4.7	82472C	11R472C	22
MTU2D0512MC	47	82473C	11R473C	4.7
MTU2D1212MC	47	82473C	11R473C	4.7

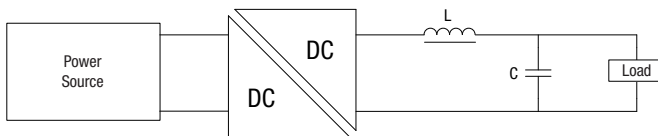


TOLERANCE ENVELOPES

The voltage tolerance envelopes show typical load regulation characteristics for this product series. The tolerance envelope is the maximum output voltage variation due to changes in output loading and set point accuracy.


MTU2D1212MC, MTU2S2405MC & MTU2D0512MC

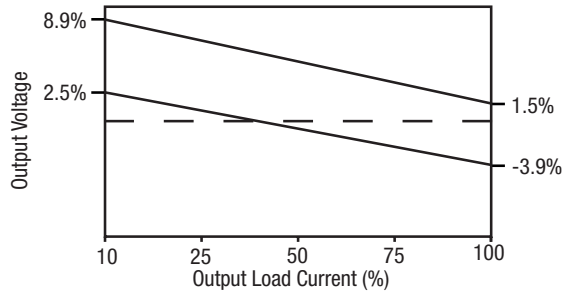


MTU2D0505MC, MTU2S0505MC & MTU2S1205MC

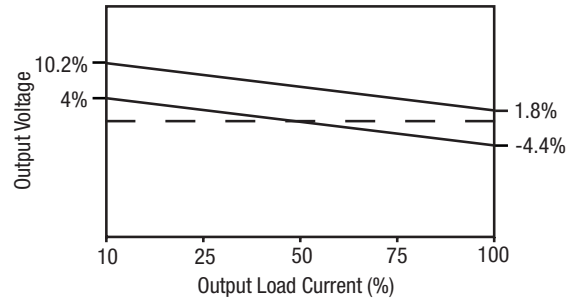

MTU2S0305MC

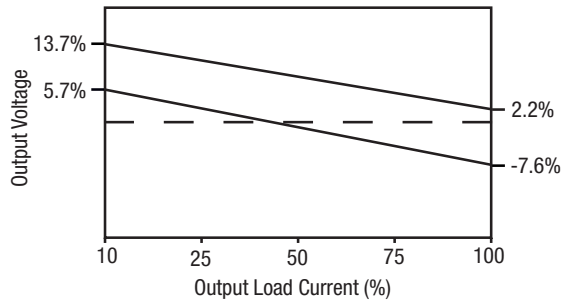


MTU2S0524MC

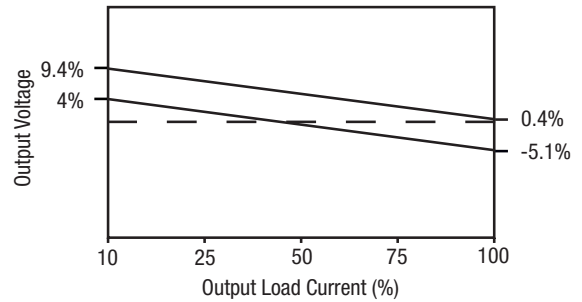


EFFICIENCY VS LOAD


3.3V INPUT

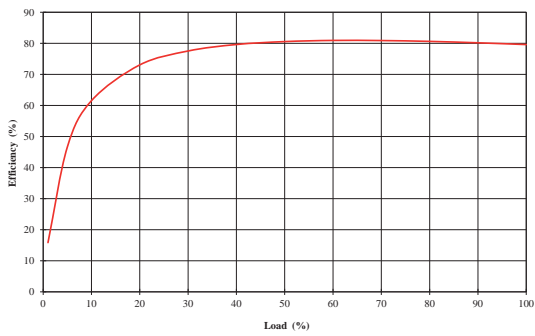


5V INPUT

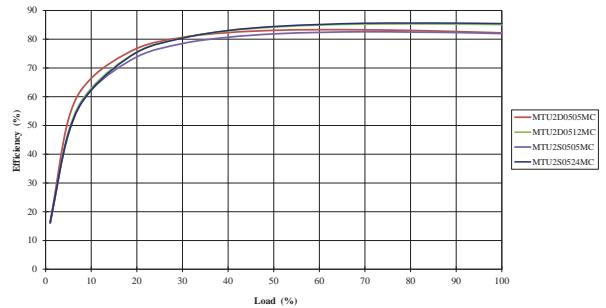

12V INPUT

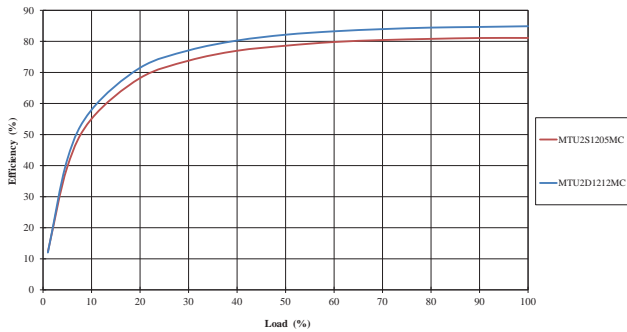


24V INPUT

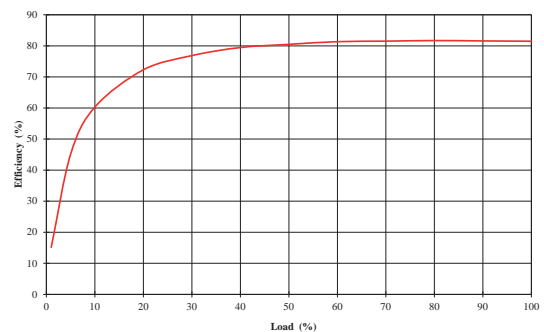


TEMPERATURE DERATING


MTU2S0305MC

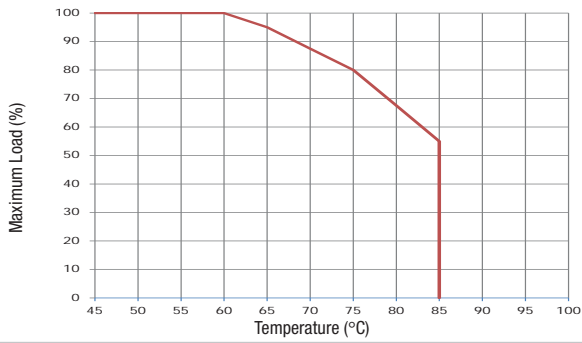


MTU2S0505MC

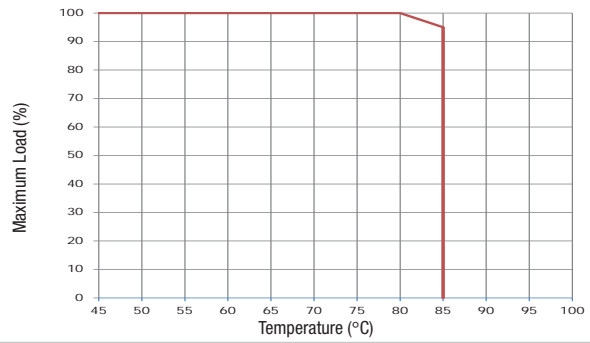


MTU2S0524MC

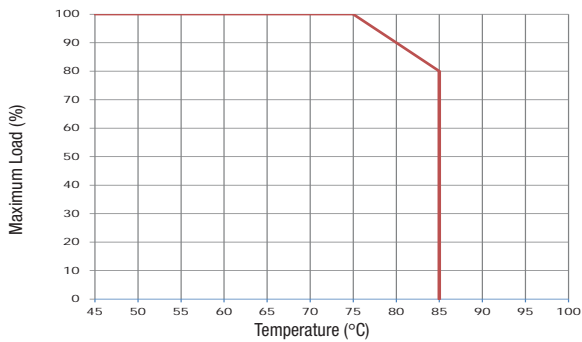


MTU2S1205MC

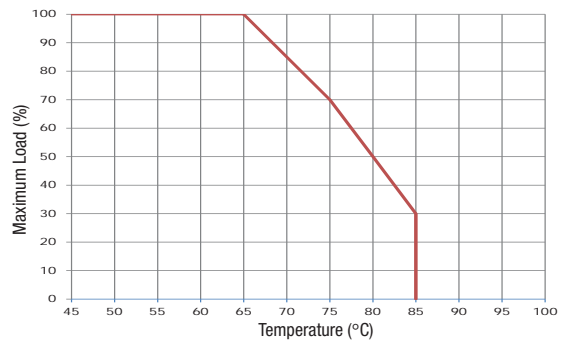


MTU2S2405MC

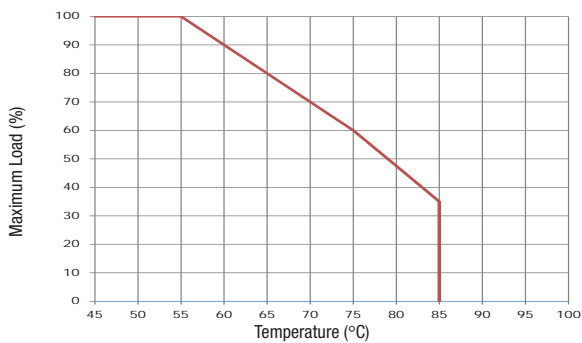


MTU2D0505MC

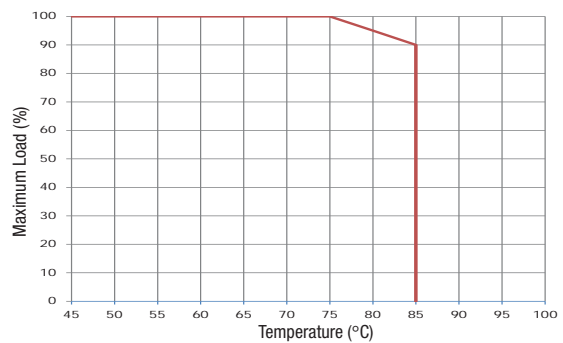

MTU2D0512MC

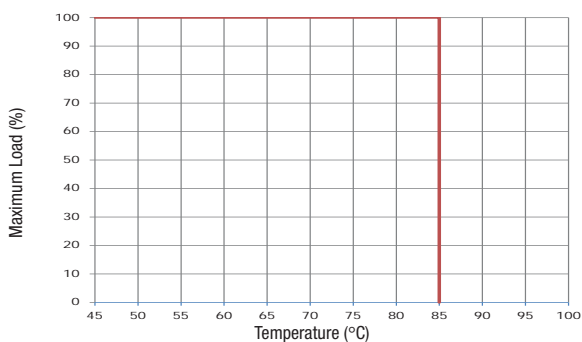


MTU2D1212MC

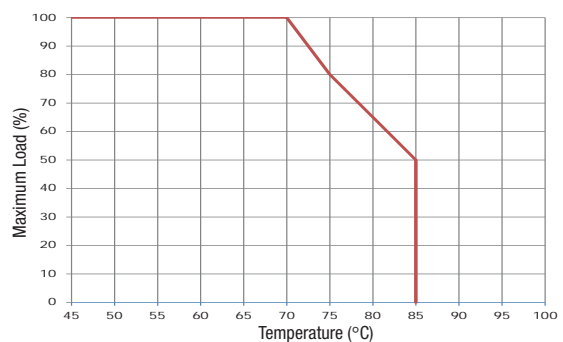

PACKAGE SPECIFICATIONS

MECHANICAL DIMENSIONS

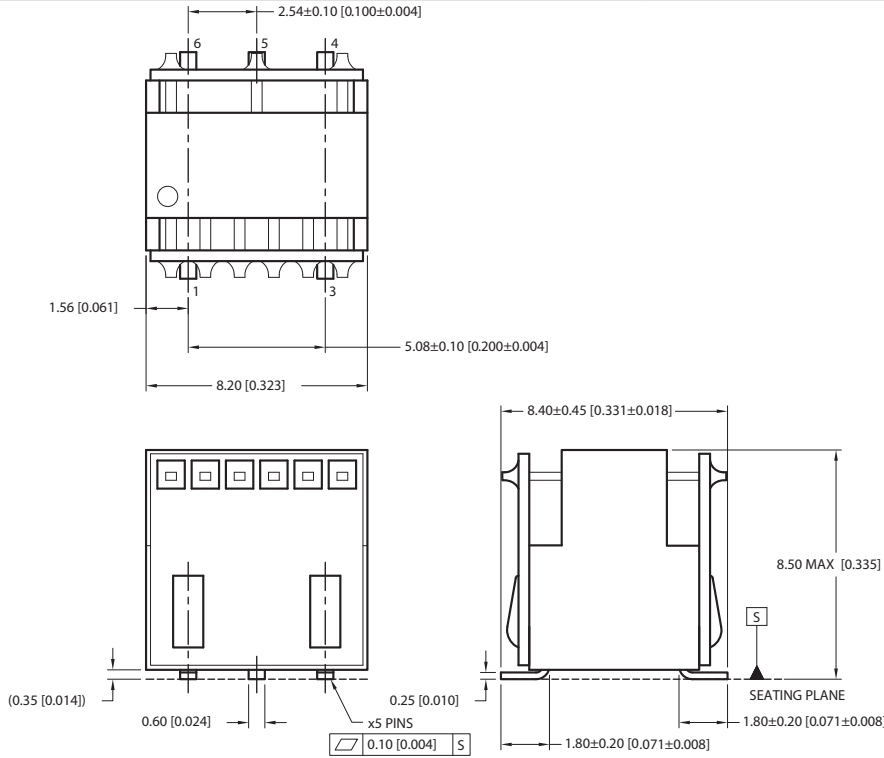


All dimensions in mm (inches) ±0.05mm (0.002"). Controlling dimension is mm. All pins on a 2.54mm (0.100") pitch. Weight: 0.79g, typ.

PIN CONNECTIONS


Single Output Types	
Pin	Function
1	+V _{IN}
3	-V _{IN}
4	NC
5	OV
6	+V _{OUT}

Dual Output Types	
Pin	Function
1	+V _{IN}
3	-V _{IN}
4	-V _{OUT}
5	OV
6	+V _{OUT}

RECOMMENDED FOOTPRINT DETAILS

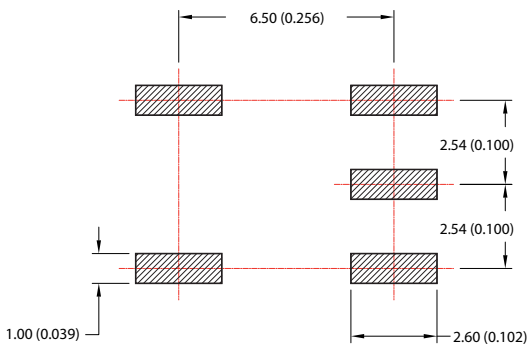

TUBE OUTLINE DIMENSIONS

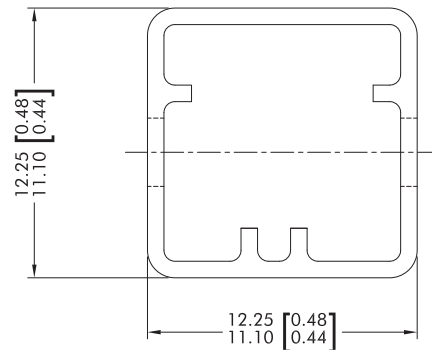


Unless otherwise stated all dimensions in mm (inches).
Tube length: 520mm (20.472) ±2.00 (0.079).


Tube Quantity: 60

TAPE & REEL SPECIFICATIONS


REEL OUTLINE DIMENSIONS

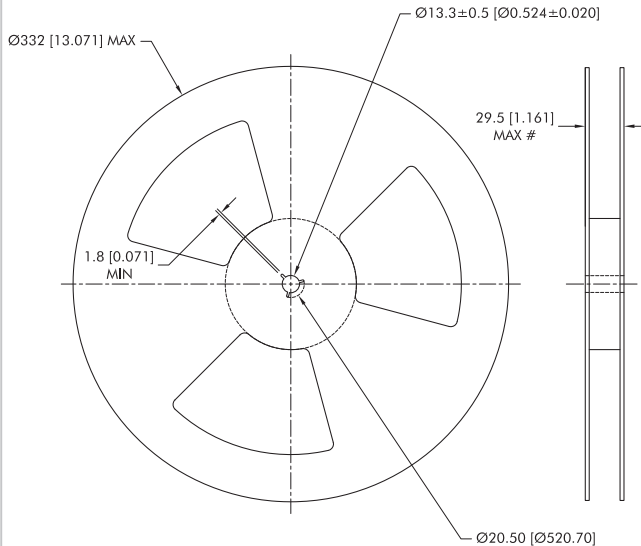

REEL PACKAGING DETAILS

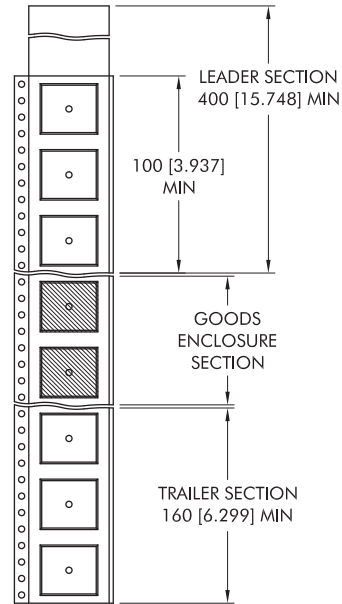

TAPE OUTLINE DIMENSIONS

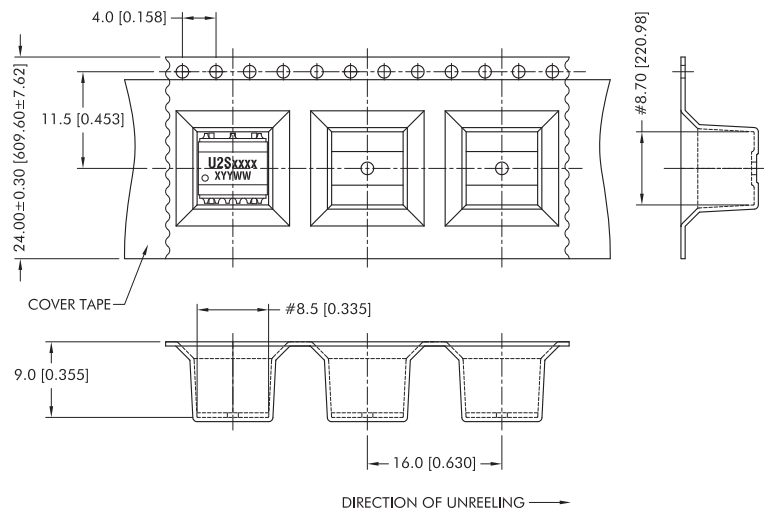

Unless otherwise stated all dimensions in mm (inches).
Controlling dimension is mm.
Components shall be orientated within the carrier tape as indicated.

Reel Quantity: 400 pcs.



This product is subject to the following **operating requirements** and the **Life and Safety Critical Application Sales Policy**:
Refer to: <http://www.murata-ps.com/requirements/>

Murata Power Solutions, Inc. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice.
© 2019 Murata Power Solutions, Inc.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Murata:

[MTU2D0505MC](#) [MTU2D0512MC](#) [MTU2D1212MC](#) [MTU2S0305MC](#) [MTU2S0505MC](#) [MTU2S0524MC](#)
[MTU2S1205MC](#) [MTU2S2405MC](#) [MTU2D0505MC-R](#) [MTU2D0512MC-R](#) [MTU2D1212MC-R](#) [MTU2S0305MC-R](#)
[MTU2S0505MC-R](#) [MTU2S0524MC-R](#) [MTU2S1205MC-R](#) [MTU2S2405MC-R](#)