

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0759107636](#)
Status: **Active**
Overview: GbX I-Trac™ Backplane Connector System
Description: GbX I-Trac™ Right-Angle Header Module, 1.85mm by 3.70mm Pitch, Left Guided Inverted, Right Wall, 11 Rows, 6 Columns, 132 Circuits, Staggered Mating Pin Length 4.70mm & 5.70mm


Documents:
[3D Model](#)
[Drawing \(PDF\)](#)
[Packaging Specification PK-70873-585 \(PDF\)](#)
[RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification
UL E29179

General
Product Family Backplane Connectors
Series [75910](#)
Application Coplanar, Daughtercard
Component Type Right Angle Male
Overview [GbX I-Trac™ Backplane Connector System](#)
Product Name GbX I-Trac™
UPC 756054932902

Physical
Circuits (Loaded) 132
Circuits (maximum) 132
Color - Resin Black
Durability (mating cycles max) 200
First Mate / Last Break No
Flammability 94V-0
Guide to Mating Part Yes
Keying to Mating Part None
Material - Metal High Performance Alloy (HPA)
Material - Plating Mating Gold
Material - Plating Termination Tin
Material - Resin High Temperature Thermoplastic
Net Weight 26.240/g
Number of Columns 6
Number of Pairs 6, Open Pin Field
Number of Rows 11
Orientation Right Angle
PC Tail Length 2.00mm
PCB Locator Yes
PCB Retention Yes
PCB Thickness - Recommended 1.60mm
Packaging Type Tray
Pitch - Mating Interface 1.85mm, 3.70mm
Pitch - Termination Interface 1.00mm, 2.70mm
Plating min - Mating 0.762µm
Plating min - Termination 0.762µm
Polarized to PCB Yes
Stackable No
Surface Mount Compatible (SMC) Yes
Temperature Range - Operating -55°C to +80°C
Termination Interface: Style Through Hole - Compliant Pin

Electrical

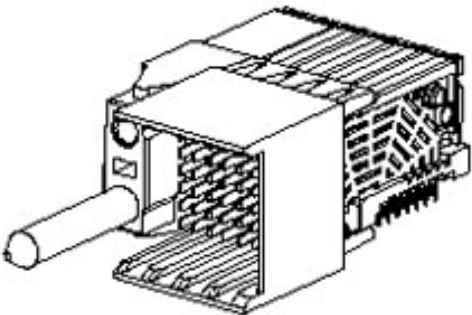

Series image - Reference only

EU ELV
Not Relevant

EU RoHS **China RoHS**
Compliant
REACH SVHC
Not Contained Per -
ED/21/2016 (20 June
2016)
Halogen-Free
Status
Low-Halogen

Need more information on product environmental compliance?

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS Green Image
ELV Not Relevant

Search Parts in this Series
[75910](#) Series

Mates With
[75710](#) GbX I-Trac™ Right Angle Receptacle Module

Use With
[78235](#) GbX I-Trac™ Right-Angle Power Receptacle

Application Tooling | FAQ
Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global
Description **Product #**
Press-In Tool [0622018605](#)
for Right Angle

Current - Maximum per Contact	1.0A	Receptacle and Header 11-Row, 6-Column
Data Rate	12.0 Gbps	
Shield Type	N/A	
Shielded	No	
Voltage - Maximum	120V AC (RMS)/DC	
Solder Process Data		
Lead-freeProcess Capability	N/A	
Material Info		
Reference - Drawing Numbers		
Packaging Specification	PK-70873-585	
Sales Drawing	SD-75910-002	

This document was generated on 07/19/2016

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

75910-7636