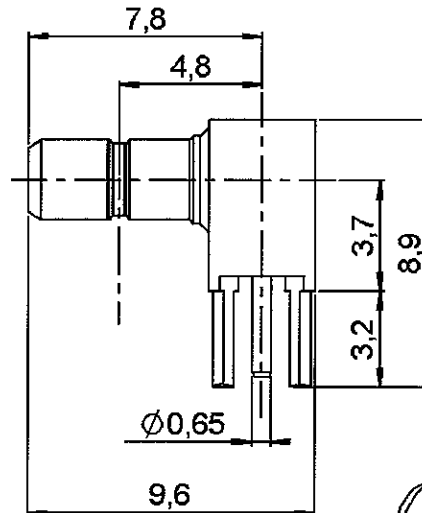
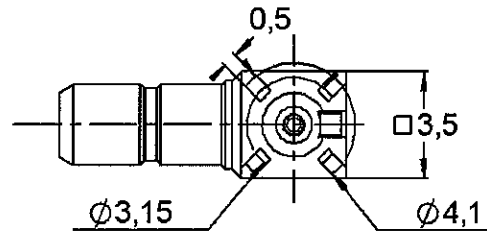



## RIGHT ANGLE JACK RECEPTACLE FOR PCB


## SOLDER LEGS

**R203.665.000**


Series : SSMB


**PANEL CUT OUT**



	mm	
	Maxi	mini
A	1.29	1.25
B	0.85	0.75
C	2.56	2.52



Scale : 1/1



All dimensions are in mm.



COMPONENTS	MATERIALS	PLATING (µm)
BODY	BRASS	GOLD 0.5 OVER NICKEL 2
CENTER CONTACT	BERYLLIUM COPPER	GOLD 1.3 OVER NICKEL 2
OUTER CONTACT	BRASS	GOLD .
INSULATOR	PTFE	
GASKET	-	-
OTHERS PARTS	-	-
-	-	-
-	-	-

Issue : 0529 F

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



**RIGHT ANGLE JACK RECEPTACLE FOR PCB****R203.665.000****SOLDER LEGS**

Series : SSMB

**PACKAGING**

Standard	Unit	Other
100	'W' option	Contact us

**SPECIFICATION****ELECTRICAL CHARACTERISTICS**

Impedance		50 $\Omega$
Frequency		0-4 GHz
VSWR	NA +	0.000 x F(GHz) Maxi
Insertion loss		NA $\sqrt{F}$ (GHz) dB Maxi
RF leakage	-(	NA - F(GHz)) dB Maxi
Voltage rating		175 Veff Maxi
Dielectric withstanding voltage		500 Veff mini
Insulation resistance		1000 M $\Omega$ mini

**ENVIRONMENTAL**

Operating temperature	-65/+165 °C
Hermetic seal	NA Atm.cm3/s
Panel leakage	NA

**OTHER CHARACTERISTICS**

Assembly instruction NA

Others :  
-**MECHANICAL CHARACTERISTICS**

Center contact retention	
Axial force – Mating end	8 N mini
Axial force – Opposite end	8 N mini
Torque	NA N.cm mini
Recommended torque	
Mating	NA N.cm
Panel nut	NA N.cm
Mating life	500 Cycles mini
Weight	0.000 g

Issue : 0529 F

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

**RADIALL®**

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Radial:

R203665000