




**FineAdjust
Applicator**

**Application Tooling
Specification Sheet**



Order No. 63902-9200

FEATURES

- Quick punch removal with the push of a button for fast and easy tooling change
- Applicator designed to industry standard mounting and shut height 135.80mm (5.346")
- Quick set-up time; plus the crimp height, track and feed adjustments can be set without removing the applicator from the press
- Fine adjustment allows users to achieve target with little effort by adjusting in increments of .015mm (.0006") for conductor crimp height and .063mm (.0025") for insulation height
- Independent adjustment rings allow users to quickly adjust the conductor or insulation crimp height without affecting each other
- Directly adapts to most automatic wire processing machines


SCOPE

Products: 1.5 W/B Receptacle Terminals, 30 AWG UL1061 and 32 AWG UL1571 wires.

| Terminal Series No. | Terminal Order No. | Wire Size | | ★ Insulation Diameter | | Strip Length | |
|---------------------|--------------------|-----------|-----------------|-----------------------|-----------|--------------|-----------|
| | | AWG | mm ² | mm | In. | mm | In. |
| 504052 | 504052-0298 | 30-32 | - | 0.54-0.80 | .021-.032 | 1.50-1.90 | .059-.075 |

★ Insulation crimp to meet IPC/WHMA-A-620 Class 2 compliance.

DEFINITION OF TERMS

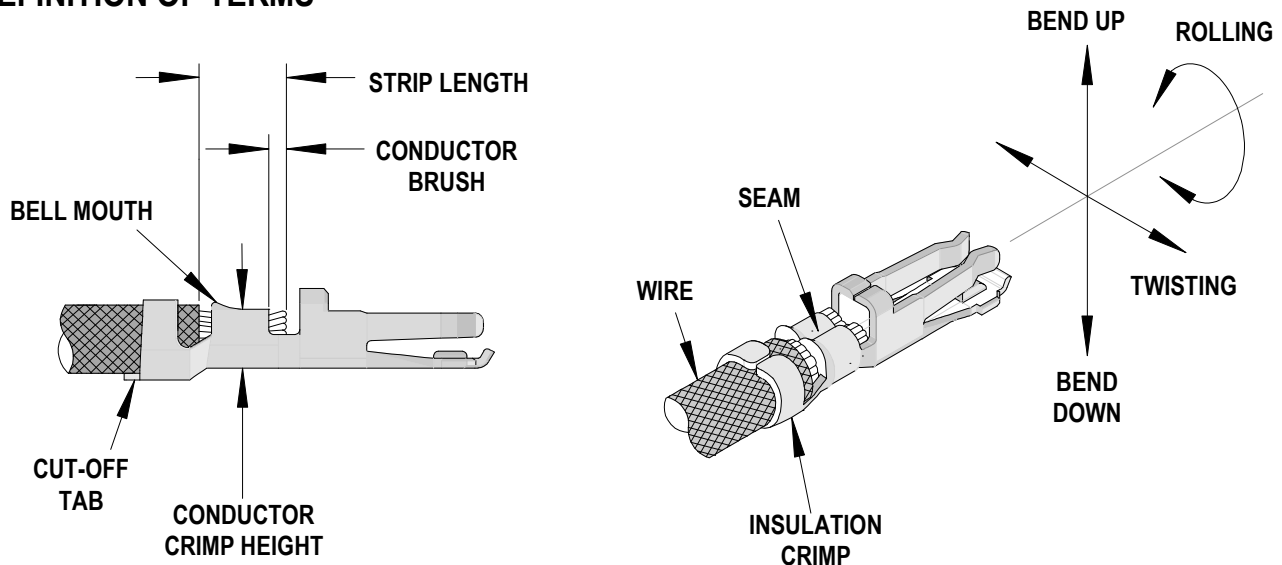

CRIMP SPECIFICATION

| Terminal Series No. | Bell mouth | | Cut-off Tab Maximum | | Conductor Brush | |
|---------------------|------------|-----------|---------------------|------|-----------------|-----------|
| | mm | In. | mm | In. | mm | In. |
| 504052 | 0.10-0.40 | .004-.016 | 0.10 | .004 | 0.10-0.60 | .004-.024 |

| Terminal Series No. | Bend up | Bend down | Twist Roll | | Punch Width (Ref) | | | | Seam Seam shall not be open and no wire allowed out of the crimping area |
|---------------------|-------------|-----------|-------------|----|-------------------|------|------------|------|---|
| | Degree Max. | | Degree Max. | | Conductor | | Insulation | | |
| | mm | In | mm | In | mm | In | mm | In | |
| 504052 | 3 | 2 | 3 | 6 | 0.85 | .033 | 1.00 | .039 | |

After crimping, the crimp profiles should measure the following:

| Terminal Series No. | Wire Size | | Conductor | | | | Insulation | | | | Pull Force Minimum | |
|---------------------|-----------|-----------------|--------------|-----------|-------------------|------|---------------------|------|--------------------|------|--------------------|------|
| | | | Crimp Height | | Crimp Width (Ref) | | Crimp Height (Ref.) | | Crimp Width (Ref.) | | | |
| | AWG | mm ² | mm | In. | mm | In. | mm | In. | mm | In. | N | Lb. |
| 504052 | 30 | - | 0.42-0.46 | .016-.018 | 0.85 | .033 | 1.20 | .047 | 1.00 | .039 | 4.9 | 1.10 |
| | 32 | - | 0.40-0.44 | .015-.017 | 0.85 | .033 | 1.10 | .043 | 1.00 | .039 | 2.9 | 0.66 |

■ Tool Qualification Notes:

1. Pull Force should be measured with no influence from the insulation crimp.
2. The above specifications are guidelines to an optimum crimp.

PARTS LIST

| FineAdjust Applicator 63902-9200 | | | | |
|--|-----------------|------------------------|------------------------------------|-----------------|
| Item | Order No | Engineering No. | Description | Quantity |
| Perishable Tooling | | | | |
| | 63902-9270 | 63902-9270 | Tool Kit (All "Y" Items) | REF |
| 1 | 63457-0096 | 63457-0096 | Conductor Punch | 1 Y |
| 2 | 63455-0123 | 63455-0123 | Conductor Anvil | 1 Y |
| 3 | 63454-0140 | 63454-0140 | Insulation Punch | 1 Y |
| 4 | 63445-1008 | 63445-1008 | Insulation Anvil | 1 Y |
| 5 | 63443-0005 | 63443-0005 | Cut-Off Plunger | 1 Y |
| 6 | 63443-0012 | 63443-0012 | Front Plunger Retainer | 1 Y |
| Other Components | | | | |
| 7 | 11-18-4083 | 60707-8 | Feed Guide | 1 |
| 8 | 11-24-1067 | 4996-4 | Cut-off Plunger Spring | 1 |
| 9 | 63443-0009 | 63443-0009 | Scrap Chute | 1 |
| 10 | 63443-0024 | 63443-0024 | Key | 1 |
| 11 | 63443-0090 | 63443-0090 | Wire Stop | 1 |
| 12 | 63443-1719 | 63443-1719 | Height Spacer (18.90mm) | 1 |
| 13 | 63443-2217 | 63443-2217 | Coarse Spacer (17.00mm) | 1 |
| 14 | 63443-2301 | 63443-2301 | Fine Spacer (3.05mm) | 1 |
| 15 | 63443-2805 | 63443-2805 | Front Plunger Striker | 1 |
| 16 | 63443-2905 | 63443-2905 | Wire Hold-Down Plunger | 1 |
| 17 | 63443-6108 | 63443-6108 | Rear Cover | 1 |
| 18 | 63600-0021 | 63600-0021 | Striker Plunger Spring | 1 |
| Frame | | | | |
| 19 | 63800-4901 | 63800-4901 | Top | 1 |
| 20 | 63801-3281 | 63801-3281 | Base | 1 |
| 21 | 63801-4650 | 63801-4650 | Track | 1 |
| Hardware | | | | |
| 22 | N/A | N/A | M3 by 6 Long SHCS | 2** |
| 23 | N/A | N/A | M3 by 6 Long FHCS | 1** |
| 24 | N/A | N/A | M4 by 6 Long SHCS | 2** |
| 25 | N/A | N/A | M4 by 12 Long BHCS | 2** |
| 26 | N/A | N/A | M4 by 50 Long SHCS | 2** |
| 27 | N/A | N/A | M5 by 12 Long SHCS | 1** |
| 28 | N/A | N/A | #10-32 by 3/8" Long Flat Point SSS | 1** |
| 29 | N/A | N/A | #10-32 Hex Jam Nut | 1** |
| ** Available from an industrial supply company such as MSC (1-800-645-7270). | | | | |

Assembly Drawing

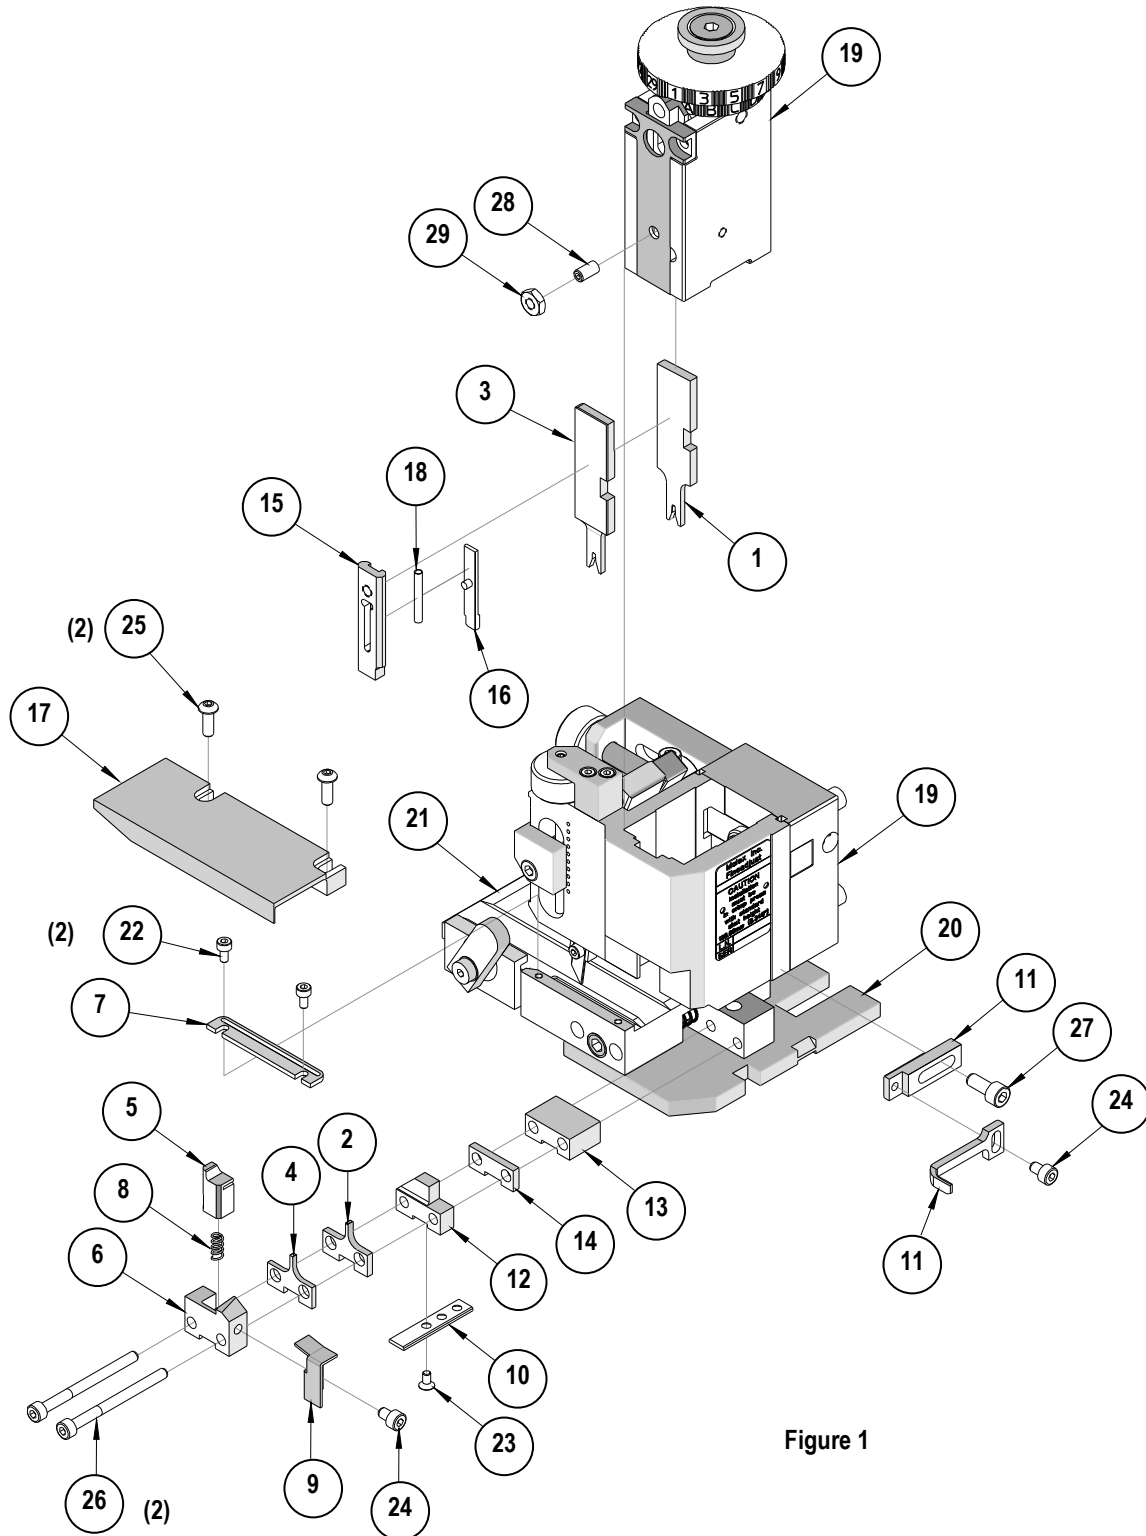


Figure 1

NOTES

1. Molex recommends an extra perishable tooling kit be maintained at your facility.
2. Verify tooling alignment by manually cycling the press and Applicator before crimping under power. Check that all screws are tight.
3. Slugs, Terminals, Dirt and Oil should be kept clear of work area.
4. Wear safety glasses at all times.
5. For recommended maintenance refer to the FineAdjust Manual.

CAUTION: This applicator should only be used in a press with a shut height of 135.80 mm (5.346"). Tooling damage could result at a lower setting.

CAUTION: To prevent injury never operate this Applicator without the guards supplied with the press or wire-processing machine in place. Reference the press or wire processing manufacturer's instruction manual.

CAUTION: Molex crimp specifications are valid only when used with Molex terminals, applicators and tooling.

Visit our Web site at <http://www.molex.com>

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[63455-0123](#) [63445-1008](#) [63454-0140](#)