


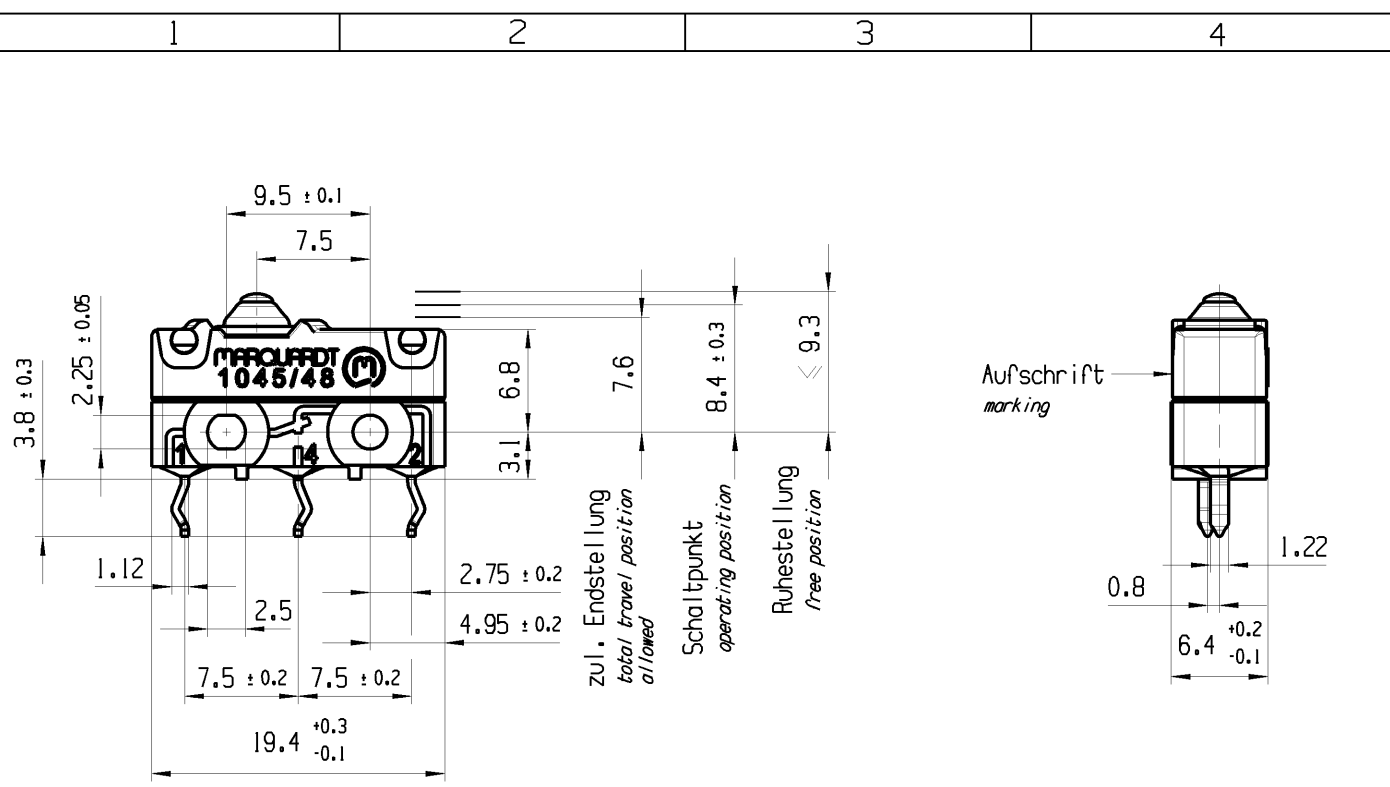


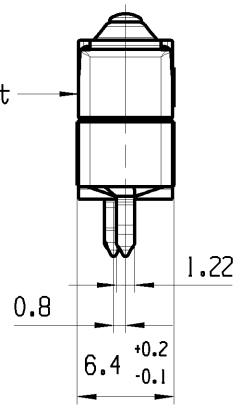

Aufschrift
marking

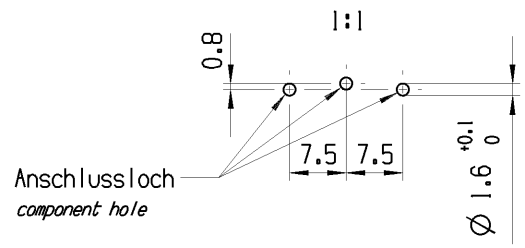


Empfohlenes Lochbild Bestueckungsseite
Toleranzen nach DIN IEC 326 Teil 3 sehr fein
Recommended hole pattern component side
tolerances acc. to DIN IEC 326 item 3 very fine



Anschlussloch
component hole

Aufschrift
Marking



NC NO
2 4

Wechsler 1-polig
single pole changeover

Schaltbetaetigungskraft
actuating force ≤ 2.6 N

Rueckschaltkraft
release force ≥ 0.7 N

Differenzweg
movement differential ≤ 0.2 mm

IP Schutzklasse nach EN 60529 IP 67
protection class acc to EN 60529 IP 67

G: Konform nach IEC 60335-1:2001 Kap. 30
G: matching IEC 60335-1:2001 clause 30

fuer Form und Lage FOR SHAPE AND LOC.	⊙ =	0.1	Allgemeintoleranzen UNTOLERANCED DIMENSIONS					Pause COPY	Blatt SHEET 01		TYP K	Zeichn./DRAWING NO. 10452702	Index c	
			PROJEKTION	Abmasse und Nennmassbereiche Angaben in mm	0-6 ± 0.1 >6-15 ± 0.15 >15-30 ± 0.2 >30-70 ± 0.3 >70-120 ± 0.4 >120 ± 0.8	Laenge LENGTH	Radien RADII		Original Din A4	Massstab SCALE 2:1				
fuer Winkel FOR ANGLE ± 2	+0.25 10 +0.1 -0.25			ALL DIMENSIONS ARE IN MILLIMETRES					0 10 20 30mm		SCHNAPPSCHALTER			
c	83090	11.03.13	BRC					CAD: NX V6.0	Snap action switch					
b	78489	26.04.12	BRC					gez./DRAWN BY 30.05.11 BRC	MARQUARDT					
a	77237	06.02.12	BRC					gepr./CHECKED BY						
	73556	06.07.11	LM					Ersatz fuer/REPLACEMENT OF						
Ausg. ISSUE	Aenderung REVISION	gez. DRAWN BY		Ausg. ISSUE	Aenderung REVISION	gez. DRAWN BY								

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Marquardt:](#)

[1045.2702](#)