

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC

	DIST
--	------

REVISIONS

	F
--	---

LTR

DESCRIPTION

DATE _____

DWN

	APVD
--	------



C

REVISÉ ECR-12-021182

10DEC12

J.J

S.Y

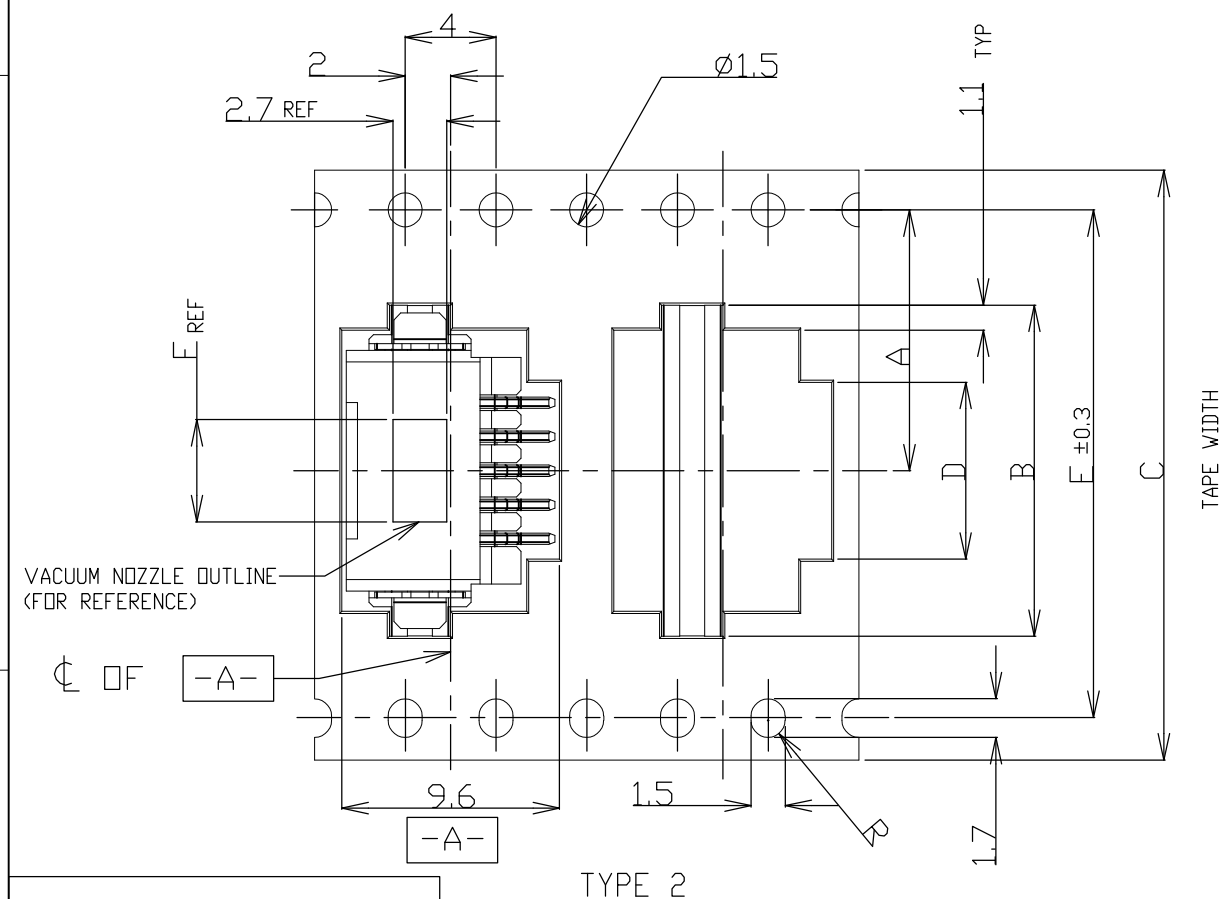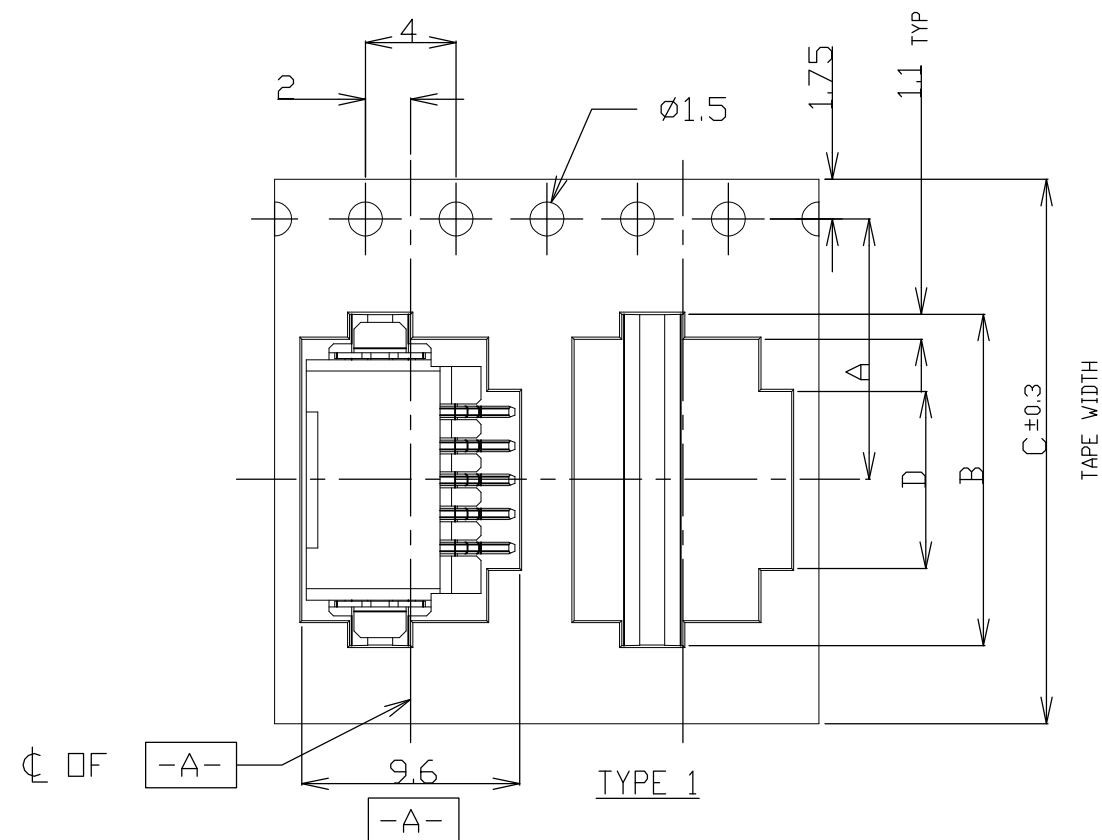


TOLERANCES UNLESS
OTHERWISE SPECIFIED:

```
10>_      : ±0,2
30>_* >10 : ±0,25
100>_* >30 : ±0,3
ANGLE      : ±3°
```

NOTE:

1. PEELING STRENGTH: 0.20-0.69N(20-70gf)
PEELING ANGLE: 165-180°
PEELING SPEED: 300mm/MINUTE.

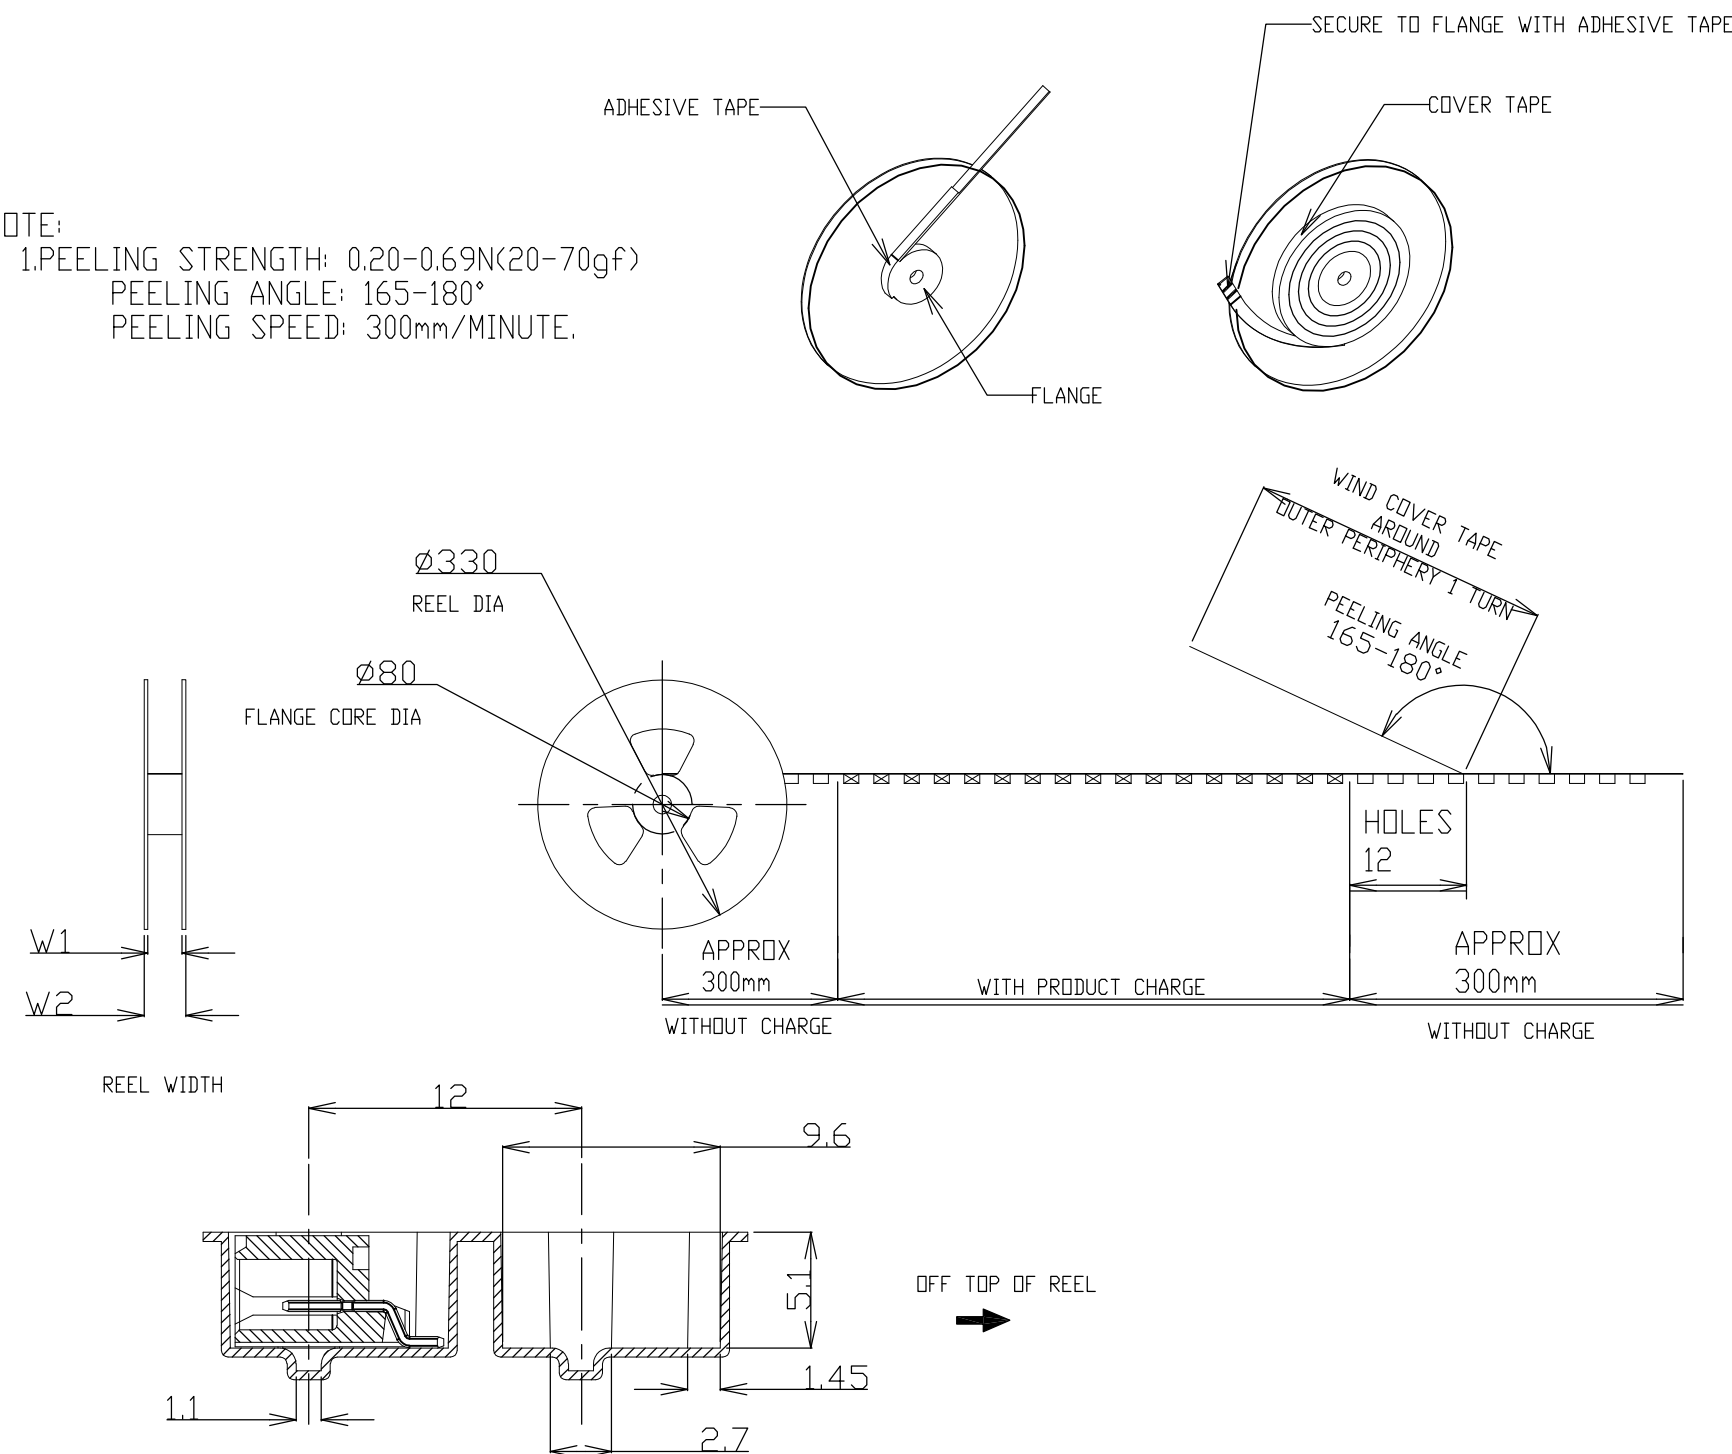

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	31JAN0
-----	--------

CHK	31JAN0
-----	--------

S. YAU
ABVD 31 JAN 2000

T.SASAKI
PRODUCT CREO

108-60018

APPLICATION SPEC

114-5223



TE Connectivity

3	NAME
---	------

AMP Mini CT Connector 1.5mm PITCH
SINGLE ROW POST HDR ASS'Y (H)
T TYPE WITH BOSS, EMBOSS TAPE PACKAGED

	SIZE
--	------

CAGE CODE	
-----------	--

E	DRAWING NO
---	------------

RESTRICTED TO

A3 00779 C-292227

SCALE NTS

SHEET 1 OF 4

REV	C1
-----	----

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC
ES

DIST
00

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD

-

SEE SHEET 1

-

-

-

TYPE 2

61.5

57.5

6.2

52.4

30.5

56

37.1

±0.15

700

20

BLACK

7-292227-0

61.5

57.5

6.2

52.4

29.0

56

35.6

26.2

700

19

6-292227-9

49.5

45.5

6.2

40.4

27.5

44

34.1

20.2 ±0.15

700

18

6-292227-8

49.5

45.5

6.2

40.4

26.0

44

32.6

700

17

6-292227-7

49.5

45.5

6.2

40.4

24.5

44

31.1

700

16

6-292227-6

49.5

45.5

6.2

40.4

23.0

44

29.6

700

15

6-292227-5

49.5

45.5

6.2

40.4

21.5

44

28.1

700

14

6-292227-4

49.5

45.5

6.2

40.4

20.0

44

26.6

700

13

6-292227-3

49.5

45.5

6.2

40.4

18.5

44

25.1

700

12

6-292227-2

49.5

45.5

6.2

40.4

17.0

44

23.6

20.2

700

11

6-292227-1

37.5

33.5

6.2

28.4

15.5

32

22.1

14.2

700

10

6-292227-0

37.5

33.5

6.2

28.4

14.0

32

20.6

14.2

700

9

5-292227-9

37.5

33.5

6.2

28.4

12.5

32

19.1

14.2

700

8

5-292227-8

37.5

33.5

6.2

28.4

11.0

32

17.6

14.2

700

7

5-292227-7

29.5

25.5

6.2

-

9.5

24

16.1

11.5

700

6

5-292227-6

29.5

25.5

6.2

-

8.0

24

14.6

11.5

700

5

5-292227-5

29.5

25.5

6.2

-

6.5

24

13.1

11.5

700

4

5-292227-4

29.5

25.5

4.7

-

5.0

24

11.6

11.5

700

3

5-292227-3

29.5

25.5

2.8

-

3.5

24

10.1

11.5

700

2

5-292227-2

TAPE TYPE

W2

W1

F

E

D

C

B

A

QTY/REEL

POS

COLOR

ON TAPE P/N

DIMENSIONS

TYPE 2

61.5

57.5

6.2

52.4

30.5

56

37.1

±0.15

700

20

BEIGE

2-292227-0

61.5

57.5

6.2

52.4

29.0

56

35.6

26.2

700

19

1-292227-9

49.5

45.5

6.2

40.4

27.5

44

34.1

20.2 ±0.15

700

18

1-292227-8

49.5

45.5

6.2

40.4

26.0

44

32.6

700

17

1-292227-7

49.5

45.5

6.2

40.4

24.5

44

31.1

700

16

1-292227-6

49.5

45.5

6.2

40.4

23.0

44

29.6

700

15

1-292227-5

49.5

45.5

6.2

40.4

21.5

44

28.1

700

14

1-292227-4

49.5

45.5

6.2

40.4

20.0

44

26.6

700

13

1-292227-3

49.5

45.5

6.2

40.4

18.5

44

25.1

700

12

1-292227-2

49.5

45.5

6.2

40.4

17.0

44

23.6

20.2

700

11

1-292227-1

37.5

33.5

6.2

28.4

15.5

32

22.1

14.2

700

10

1-292227-0

37.5

33.5

6.2

28.4

14.0

32

20.6

14.2

700

9

292227-9

37.5

33.5

6.2

28.4

12.5

32

19.1

14.2

700

8

292227-8

37.5

33.5

6.2

28.4

11.0

32

17.6

14.2

700

7

292227-7

29.5

25.5

6.2

-

9.5

24

16.1

11.5

700

6

292227-6

29.5

25.5

6.2

-

8.0

24

14.6

11.5

700

5

292227-5

29.5

25.5

6.2

-

6.5

24

13.1

11.5

700

4

292227-4

29.5

25.5

4.7

-

5.0

24

11.6

11.5

700

3

292227-3

29.5

25.5

2.8

-

3.5

24

10.1

11.5

700

2

292227-2

TAPE TYPE

W2

W1

F

E

D

C

B

A

QTY/REEL

POS


COLOR

ON TAPE P/N

DIMENSIONS

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm



TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -

1 PLC ± -

2 PLC ± -

3 PLC ± -

4 PLC ± -

ANGLES ± -

FINISH -

MATERIAL

-

DWN
S.XU
31JAN03

CHK
S.YAO
31JAN03

APVD
T.SASAKI
31JAN03

PRODUCT SPEC
108-60018

APPLICATION SPEC
114-5223

WEIGHT
-

CUSTOMER DRAWING

TE Connectivity

NAME
AMP Mini CT Connector 1.5mm PITCH
SINGLE ROW POST HDR ASS'Y (H)
SMT TYPE WITH BOSS, EMBOSS TAPE PACKAGED

SIZE
A3

CAGE CODE
00779

DRAWING NO
C-292227



RESTRICTED TO
-

SCALE
NTS

SHEET
2 OF 4

REV
C1

1470-19 (3/11)

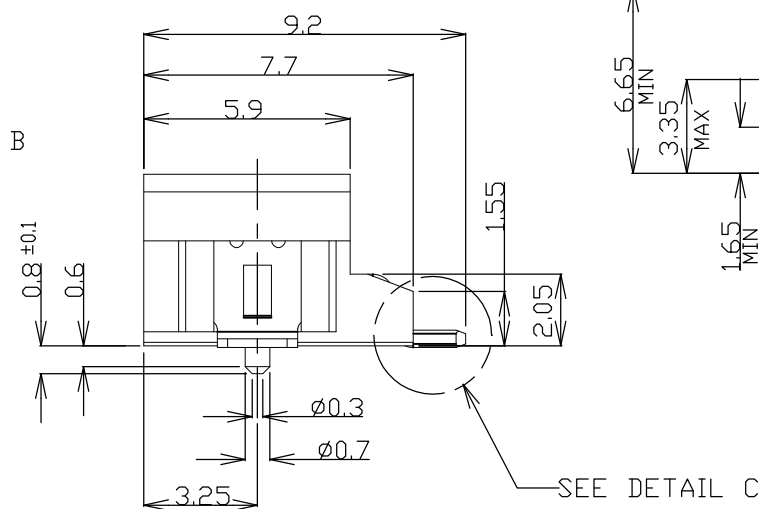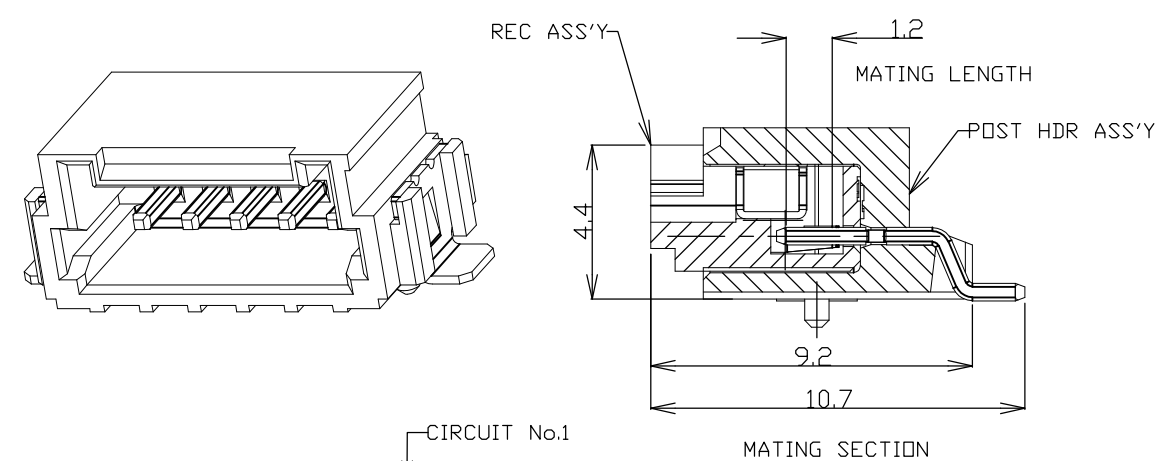


LOC	DIST	REVISIONS				
ES	00	P	LTR	DESCRIPTION	DATE	APVD
			-	SEE SHEET 1	-	-

1.079	36.5	31.5	34.5	30.6	28.5	20	7-292227-0	2-292227-0
1.034	35.0	30.0	33.0	29.1	27.0	19	6-292227-9	1-292227-9
0.989	33.5	28.5	31.5	27.6	25.5	18	6-292227-8	1-292227-8
0.943	32.0	27.0	30.0	26.1	24.0	17	6-292227-7	1-292227-7
0.897	30.5	25.5	28.5	24.6	22.5	16	6-292227-6	1-292227-6
0.851	29.0	24.0	27.0	23.1	21.0	15	6-292227-5	1-292227-5
0.805	27.5	22.5	25.5	21.6	19.5	14	6-292227-4	1-292227-4
0.760	26.0	21.0	24.0	20.1	18.0	13	6-292227-3	1-292227-3
0.714	24.5	19.5	22.5	18.6	16.5	12	6-292227-2	1-292227-2
0.668	23.0	18.0	21.0	17.1	15.0	11	6-292227-1	1-292227-1
0.622	21.5	16.5	19.5	15.6	13.5	10	6-292227-0	1-292227-0
0.577	20.0	15.0	18.0	14.1	12.0	9	5-292227-9	292227-9
0.531	18.5	13.5	16.5	12.6	10.5	8	5-292227-8	292227-8
0.485	17.0	12.0	15.0	11.1	9.0	7	5-292227-7	292227-7
0.439	15.5	10.5	13.5	9.6	7.5	6	5-292227-6	292209-6
0.393	14.0	9.0	12.0	8.1	6.0	5	5-292227-5	292227-5
0.348	12.5	7.5	10.5	6.6	4.5	4	5-292227-4	292227-4
0.302	11.0	6.0	9.0	5.1	3.0	3	5-292227-3	292227-3
0.256	9.5	4.5	7.5	3.6	1.5	2	5-292227-2	292227-2
WEIGHT (g)	E	D	C	B	A	Pos.	BLACK	BEIGE (NAT)
	DIMENSIONS						P/N	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm



TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -
FINISH -

MATERIAL

-

DWN
S.XU
31JAN03

CHK
S.YAO
31JAN03

APVD
T.SASAKI
31JAN03

PRODUCT SPEC
108-60018

APPLICATION SPEC
114-5223

WEIGHT
-

CUSTOMER DRAWING

 TE Connectivity

NAME
AMP Mini CT Connector 1.5mm PITCH
SINGLE ROW POST HDR ASS'Y (H)
SMT TYPE WITH BOSS, EMBOSS TAPE PACKAGED

SIZE
A3

CAGE CODE
00779

DRAWING NO
C-292227

RESTRICTED TO
-

SCALE
NTS

SHEET
4 OF 4

REV
C1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-292227-3](#)