

Sleeve housing - VC-K-T2-Z-FK-7,5X29,5 - 1607680

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Sleeve housing, plastic, type: VC2, with 7.5 x 29.5 mm flat cable outlet, locking screws with positive/negative head,

The illustration shows version VC-K-T3-Z



Key Commercial Data

Packing unit	1 pc
Weight per Piece (excluding packing)	61.76 g
Custom tariff number	85389099
Country of origin	Poland

Technical data

Dimensions

Height	65 mm
--------	-------

Ambient conditions

Degree of protection	IP54
Ambient temperature (operation)	-40 °C ... 80 °C

General

Type	VC2
Degree of protection	IP54
Flammability rating according to UL 94	V0
Locking type	Screw locking, cylinder head
Fixing screws	M4
Tightening torque, mounting screw	1.5 Nm ±0.3 Nm
Type of the screw connection	7.5 x 29.5 mm
Pg screw connection	none
Cable exit	straight

Sleeve housing - VC-K-T2-Z-FK-7,5X29,5 - 1607680

Technical data

General

Housing material	PA
Seal material	EPDM
Ambient temperature (operation)	-40 °C ... 80 °C

Standards and Regulations

Flammability rating according to UL 94	V0
--	----

Classifications

eCl@ss

eCl@ss 4.0	27140816
eCl@ss 4.1	27140816
eCl@ss 5.0	27143424
eCl@ss 5.1	27143424
eCl@ss 6.0	27143424
eCl@ss 7.0	27440209
eCl@ss 8.0	27440202
eCl@ss 9.0	27440202

ETIM

ETIM 2.0	EC000007
ETIM 3.0	EC000007
ETIM 4.0	EC000437
ETIM 5.0	EC000437

UNSPSC

UNSPSC 6.01	31261501
UNSPSC 7.0901	31261501
UNSPSC 11	31261501
UNSPSC 12.01	31261501
UNSPSC 13.2	31261501

Approvals

Approvals

Approvals

EAC

Sleeve housing - VC-K-T2-Z-FK-7,5X29,5 - 1607680

Approvals

Ex Approvals


Approvals submitted

Approval details

EAC

Drawings

Dimensional drawing

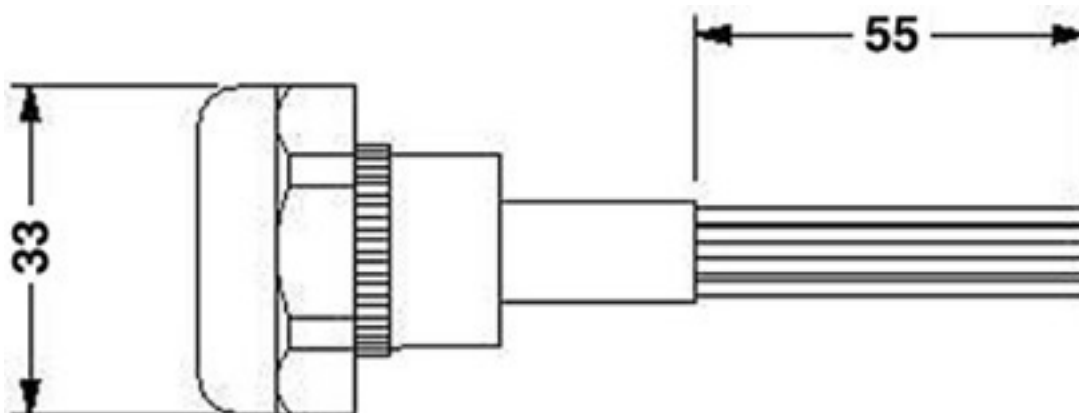

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Phoenix Contact:

1607680