

FCB-405 Series, 5 Amperes, 4PDT



Product Facts

- Hermetically Sealed
- All Welded Construction
- Balanced Force
- Permanent Magnet Drive
- Contacts rated low level to 5 Amps 28 VDC and 115/200 VAC 400 Hz, 3 Phase
- Weight .93 ounces max. (26.4 grams)
- Qualified to M83536/5 & /6

The Series FCB-405 relay is a polarized single-side stable design, where the flux from a permanent magnet provides the armature holding force in the deactivated state, and its flux path is switched and combined with the coil flux in the operated state. This results in appreciably

increased contact pressure in both states over that of a spring return nonpolar design. We also manufacture other versions of this relay:

FCB-205 — 5 Amp DPDT Relay

General Specifications

Temperature Rating —
-70°C TO + 125°C

Altitude — 300,000 Feet

Shock* —

Z & Y Enclosures —

200 g for 6 mS

W, X & M Enclosures —

100 g for 6 mS

T Enclosure (In Track) —

50 g for 11 mS

Vibration, Sinusoidal* —

Z & Y Enclosures —

30 g 70-3000Hz

W, X & M Enclosures —

20 g 70-3000Hz

T Enclosure (Socket Mounted in Track) —

20 g 500-3000 Hz

Vibration, Random* —

Z & Y Enclosures —

0.4 g²/Hz 50-2000Hz

T, W, X & M Enclosures —

0.2 g²/Hz 50-2000Hz

Dielectric Strength —

At Sea Level —

All circuits to ground and circuit to

circuit — 1000 V rms

Coil to ground — 1000 V rms

At 80,000 Feet — 250 V rms

Insulation Resistance —

Initial (500 VDC) — 100 MΩ Min.

After Life or Environmental Tests —

50 MΩ Min.

Operate Time at Nominal

Voltage — 6 ms or less

Release Time at Nominal

Voltage — 6 ms or less

* Max. contact opening under vibration or shock 10 microseconds

Contact Rating — Amperes Ratings Are Continuous Duty

Type of Load	Life (Min.) Cycles x 10 ³	28 VDC	115VAC 400Hz	115/200VAC 400Hz-3Ø
Resistive	100	5	5	5
Inductive	20	3	5	5
Motor	100	2	3	3
Lamp	100	1	1	1

Low Level Switching Capability: With contacts operating a load of 10 to 50 microamperes at 10 to 50 millivolts, the contact resistance miss detection level shall be 100 ohms max. Cycling rate is 1 to 12 per second, for 100,000 operations.

Overload Current — 20 AMPS DC, 30 AMPS 400Hz

Rupture Current — 25 AMPS DC, 40 AMPS 400Hz

Contact Make Bounce — 1.0 MILLISECOND AT NOMINAL VOLTAGE

Max. Contact Drop at 5 Amps — INITIAL 0.100 VOLTS

End of Life — 0.125 VOLTS

Coil Data

Coil Code	Nominal Voltages	Freq. Hz	DC Res. (B)	Over Temperature Range		
				Pickup or Below Volts	Dropout or Above Volts	Must Hold Voltage (C)
1	6	DC	25 Ω	4.5	0.3	2.5
2	12	DC	78 Ω	9.0	0.75	4.5
3	28	DC	400 Ω	18.0	1.5	7.0
4 (A)	28	DC	400 Ω	18.0	1.5	7.0
5	48	DC	1275 Ω	36.0	2.5	14.0

A. CODE 4 COILS HAVE BACK EMF SUPPRESSION TO 42 VOLTS MAX.

B. DC COIL RESISTANCE ± 10% AT 25°C

C. RELAY WILL STAY IN PICKED-UP STATE DOWN TO MUST HOLD VOLTAGES SHOWN.

D. MAX. OVERVOLTAGE: 6 & 12 VDC COILS 120% OF NOMINAL; ALL OTHERS 110% OF NOMINAL.

FCB-405 Series, 5 Amperes, 4PDT (Continued)

Below are shown the standard terminal types and the enclosures available. Specify the assembly as indicated under How To Order. Dimensions are shown in inches $\pm .010$ and (Millimeters $\pm .25$).


Terminals

CODE

"A"

Socket Pins - All DC Coils


PIN TERMINALS ARE GOLD PLATED

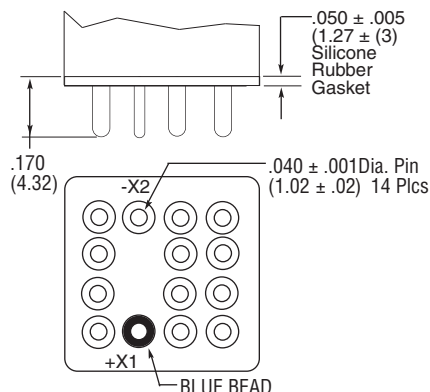**CODE**

"B"

Solder Pin Terminals


PIN TERMINALS TIN/LEAD PLATED

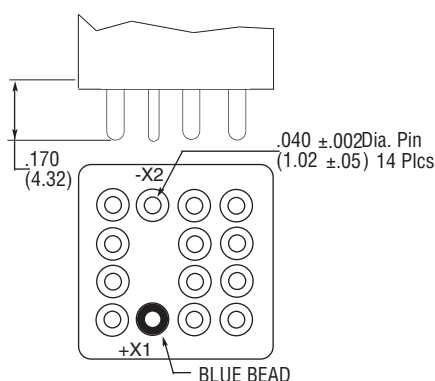**CODE**

"C


Solder Hook Terminals

HOOK TERMINALS TIN/LEAD PLATED

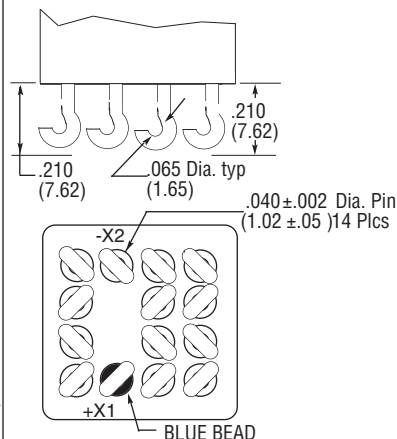**CODE**

"T"

M83536/6-025
(REFERENCE ONLY)

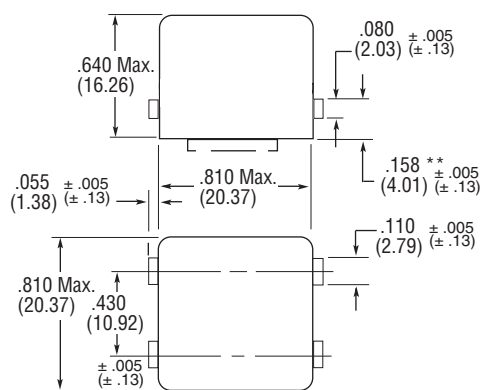

** Measured from surface of header

Enclosures


All Enclosures have cupro-Nickel cans bright acid tin/lead plated after assembly to terminal headers.

Dimensions: Inches \pm .010 (mm \pm .25)


Code "T" used only with track-mounted Sockets. Requires code "A" pin terminals. Gasket is included in the socket assembly.

CODE


"7

**CODE**

"X"

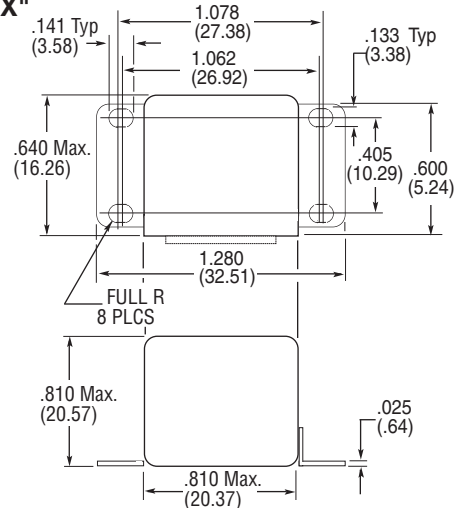
**CODE**

"Y"

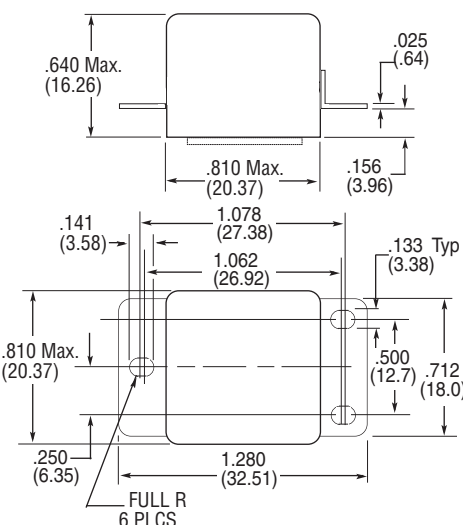

CODE	DESCRIPTION	UNIT PRICE	QUANTITY	TOTAL
101	101	101	101	101
102	102	102	102	102
103	103	103	103	103
104	104	104	104	104
105	105	105	105	105
106	106	106	106	106
107	107	107	107	107
108	108	108	108	108
109	109	109	109	109
110	110	110	110	110
111	111	111	111	111
112	112	112	112	112
113	113	113	113	113
114	114	114	114	114
115	115	115	115	115
116	116	116	116	116
117	117	117	117	117
118	118	118	118	118
119	119	119	119	119
120	120	120	120	120
121	121	121	121	121
122	122	122	122	122
123	123	123	123	123
124	124	124	124	124
125	125	125	125	125
126	126	126	126	126
127	127	127	127	127
128	128	128	128	128
129	129	129	129	129
130	130	130	130	130
131	131	131	131	131
132	132	132	132	132
133	133	133	133	133
134	134	134	134	134
135	135	135	135	135
136	136	136	136	136
137	137	137	137	137
138	138	138	138	138
139	139	139	139	139
140	140	140	140	140
141	141	141	141	141
142	142	142	142	142
143	143	143	143	143
144	144	144	144	144
145	145	145	145	145
146	146	146	146	146
147	147	147	147	147
148	148	148	148	148
149	149	149	149	149
150	150	150	150	150
151	151	151	151	151
152	152	152	152	152
153	153	153	153	153
154	154	154	154	154
155	155	155	155	155
156	156	156	156	156
157	157	157	157	157
158	158	158	158	158
159	159	159	159	159
160	160	160	160	160
161	161	161	161	161
162	162	162	162	162
163	163	163	163	163
164	164	164	164	164
165	165	165	165	165
166	166	166	166	166
167	167	167	167	167
168	168	168	168	168
169	169	169	169	169
170	170	170	170	170
171	171	171	171	171
172	172	172	172	172
173	173	173	173	173
174	174	174	174	174
175	175	175	175	175
176	176	176	176	176
177	177	177	177	177
178	178	178		


" W

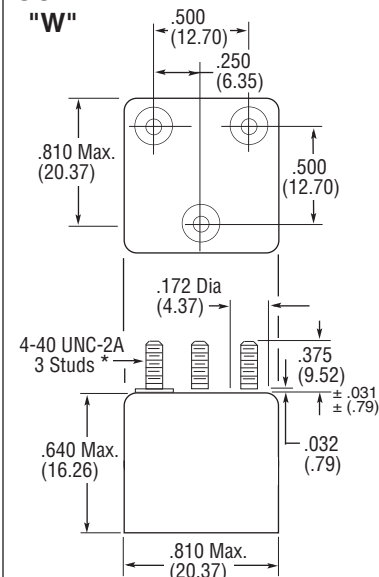


FCB-405 Series, 5 Amperes, 4PDT (Continued)

Terminal Wiring

DC Coils

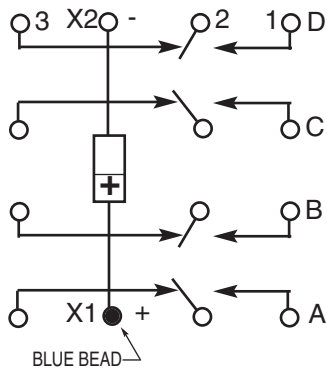


DC Coils with Transient Suppression

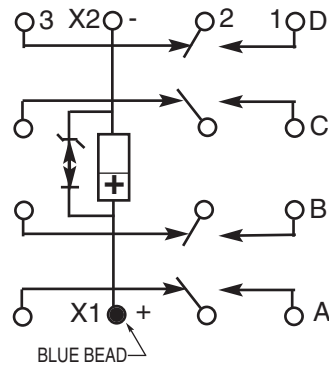

NOTE: Polarity must be observed with DC coil supply. Relay is polarized with a permanent magnet and will not operate or be damaged by reverse polarity.

Diodes used in transient suppression and in AC rectifier circuits have peak inverse voltage rating of 600 VDC minimum. Zener diodes have a minimum rating of 1 watt.

Terminal designations are for reference only and do not appear on the header.

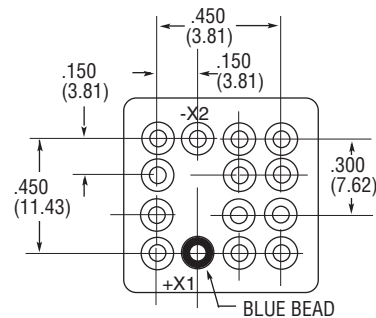

TERMINAL VIEW

HOW TO ORDER

RELAY TYPE	_____	FCB-405-A	Y	4
TERMINALS (Socket Pins)	_____			
ENCLOSURE (With Flanges)	_____			
COIL (28 VDC With Transient Suppression).	_____			

* The part number example shown on this page is for catalog items. For a list of specific QPL part numbers, please see the index in Section 15.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:

[FCB-405-0622M](#) [FCB-405-0617M](#) [FCB-405-BW4](#) [FCB-405-0508M](#) [FCB-405-0607L](#) [FCB-405-0608M](#) [FCB-405-0623L](#) [FCB-405-0631L](#) [FCB-405-0522L](#) [FCB-405-0606M](#) [FCB-405-0532M](#) [FCB-405-BY3](#) [FCB-405-0621L](#) [FCB-405-0629L](#) [FCB-405-0633L](#) [FCB-405-0620L](#) [FCB-405-0630M](#) [FCB-405-0613L](#) [FCB-405-0609L](#) [FCB-405-0618L](#) [FCB-405-0628L](#) [FCB-405-0601M](#) [FCB-405-0603M](#) [FCB-405-0606L](#) [FCB-405-0602L](#) [FCB-405-0605M](#) [FCB-405-0509L](#) [FCB-405-0525L](#) [FCB-405-0532L](#) [FCB-405-0634M](#) [FCB-405-0528M](#) [FCB-405-0601L](#) [FCB-405-0634L](#) [FCB-405-0619L](#) [FCB-405-0610M](#) [FCB-405-0611L](#) [FCB-405-0613M](#) [FCB-405-0627L](#) [FCB-405-0608L](#) [FCB-405-0632L](#) [FCB-405-0507L](#) [FCB-405-0517L](#) [FCB-405-0631M](#) [FCB-405-BZ2](#) [FCB-405-0630L](#) [FCB-405-0633M](#) [FCB-405-0604M](#) [FCB-405-0616L](#) [FCB-405-0615L](#) [FCB-405-0520L](#) [FCB-405-0523L](#) [FCB-405-0505M](#) [FCB-405-0629M](#) [FCB-405-0610L](#) [FCB-405-0623M](#) [FCB-405-0624L](#) [FCB-405-0519M](#) [FCB-405-0530M](#) [FCB-405-0611M](#) [FCB-405-0627M](#) [FCB-405-0603L](#) [FCB-405-0616M](#) [FCB-405-0615M](#) [FCB-405-0614M](#) [FCB-405-0501L](#) [FCB-405-0508L](#) [FCB-405-0526L](#) [FCB-405-0505L](#) [FCB-405-0506M](#) [FCB-405-0516L](#) [FCB-405-0513L](#) [FCB-405-0526M](#) [FCB-405-0527L](#) [FCB-405-0518L](#) [FCB-405-0531L](#) [FCB-405-0510M](#) [FCB-405-0531M](#) [FCB-405-0516M](#) [FCB-405-0519L](#) [FCB-405-0605L](#) [FCB-405-0503L](#) [FCB-405-0511L](#) [FCB-405-0625L](#) [FCB-405-0528L](#) [FCB-405-0602M](#) [FCB-405-0529L](#) [FCB-405-0506L](#) [FCB-405-0525M](#) [FCB-405-0511M](#) [FCB-405-0515M](#) [FCB-405-0510L](#) [FCB-405-0604L](#) [FCB-405-0530L](#) [FCB-405-0512M](#) [FCB-405-0529M](#) [FCB-405-0504M](#) [FCB-405-0514L](#) [FCB-405-0509M](#) [FCB-405-0514M](#) [FCB-405-0521L](#)