

SERIES: PTK15-T

DESCRIPTION: screw terminal dc-dc converter

Features

- **U-frame with screw terminals**
- **Industry standard pin out**
- **Wide 4:1 input range**
- **Fully isolated**
- **Output voltage trimmable**
- **Output on/off control**
- **Over-current protection**
- **Over-voltage protection**
- **Six-sided EMI shielding**
- **Constant switching frequency**
- **High efficiency**
- **Compact size 2.25"x3.0"x0.67"**
- **-40°C~85°C Models available**
- **3 year warranty**

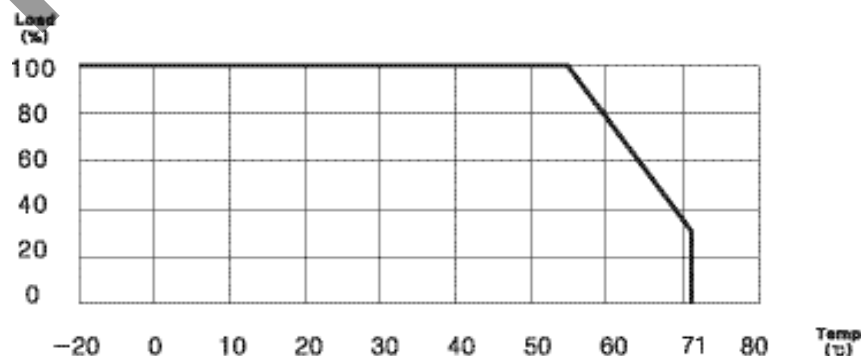


MODEL ¹	Output Power (max)	Input Voltage	Output Voltage	Output Current (max)	Ripple & Noise ² mV P-P	Efficiency (Typ.)
PTK15-Q24-S3-T	13.2W	10-36VDC	3.3VDC	4.0A	75	80%
PTK15-Q24-S5-T	15.0W	10-36VDC	5VDC	3.0A	75	85%
PTK15-Q24-S12-T	15.0W	10-36VDC	12VDC	1.25A	120	86%
PTK15-Q24-S15-T	15.0W	10-36VDC	15VDC	1.0A	150	84%
PTK15-Q24-D5-T	15.0W	10-36VDC	±5VDC	1.5A	50/50	85%
PTK15-Q24-D12-T	15.0W	10-36VDC	±12VDC	0.625A	120/120	87%
PTK15-Q24-D15-T	15.0W	10-36VDC	±15VDC	0.5A	150/150	87%
PTK15-Q48-S3-T	13.2W	20-72VDC	3.3VDC	4.0A	75	80%
PTK15-Q48-S5-T	15.0W	20-72VDC	5VDC	3.0A	75	85%
PTK15-Q48-S12-T	15.0W	20-72VDC	12VDC	1.25A	120	87%
PTK15-Q48-S15-T	15.0W	20-72VDC	15VDC	1.0A	150	87%
PTK15-Q48-D5-T	15.0W	20-72VDC	±5VDC	1.5A	50/50	85%
PTK15-Q48-D12-T	15.0W	20-72VDC	±12VDC	0.625A	120/120	86%
PTK15-Q48-D15-T	15.0W	20-72VDC	±15VDC	0.5A	150/150	87%

Note: 1 All models are also available in an extended temperature range of -40°C~85°C. For these models, append "M" to the model number, e.g. PTK15-Q48-S5M.

2 Ripple & noise measured with a 20MHz bandwidth, off a 10 μ F electrolytic and a 0.1 μ F ceramic cap in parallel at output.

Derating Curve



SERIES: PTK15-T**DESCRIPTION:** screw terminal dc-dc converter**Input**

Parameter	Conditions/Description	Min	Nom	Max	Units
Input voltage range		10	24	36	VDC
		20	48	72	VDC
Remote on/off control	Output turn-on ³	2.5V	(open)	5.5V	
	Output turn-off	0V	(short)	0.8V	
Switching frequency	Constant		250		KHz

Note: 3 Output defaults to "on" when there is no connection to the "CNT" pin.**OUTPUT**

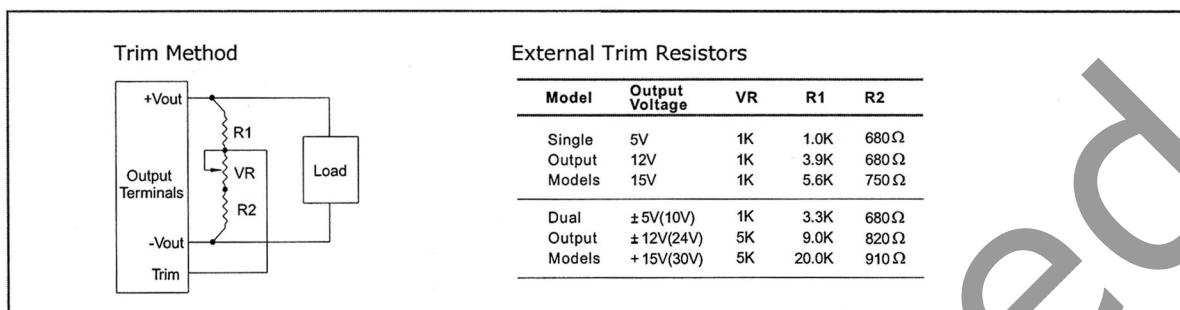
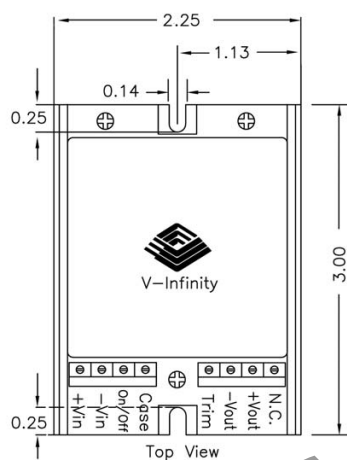
Parameter	Conditions/Description	Min	Nom	Max	Units
Output trim range	With external trim resistors	-5%		+5%	
Set point accuracy	Single output	-2%		+2%	
	Dual output	-3%		+3%	
Line regulation (Low line to high line)	Single output models	-0.25%		+0.25%	
	Dual output models	-2.5%		+2.5%	
	Triple: main output (Vout)	-0.25%		+0.25%	
	auxillary outputs (+Vaux / -Vaux)	-5%		+5%	
Load regulation ²	Single output models - no load to full load	-0.25%		+0.25%	
	Dual output models - balanced loads	-2.5%		+2.5%	
	Triple: main output (Vout)	-0.25%		+0.25%	
	auxillary outputs(+Vaux / -Vaux) - with 10% load on Vout and balanced loads on +Vaux and -Vaux	-5%		+5%	
Minimum load	Converters will not be damaged if loading conditions are less than minimum specified loads, but regulation specs may not be met ⁴				
Ripple and noise	See chart				

Note: 4 Single output: no min. load required, Dual output: 10%, Triple output: balanced load**PROTECTION**


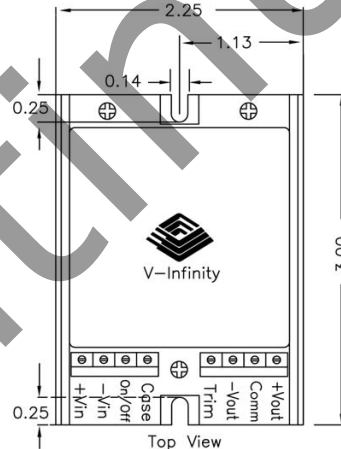
Parameter	Conditions/Description	Min	Nom	Max	Units
Over-current	Continuous auto recovery ⁵	105%		135%	
Over-voltage	Internally zener clamped ⁵	110%		140%	

Note: 5 Continuous operation in a protected state may compromise long-term reliability.**GENERAL**


Parameter	Continuous/Description	Min	Nom	Max	Units
Efficiency	Typical at full load	78%		83%	
Dielectric withstand	Input/case, input/output, output/case	500			VAC
Insulation resistance	at 500 VDC	100M			Ohms
Agency standards	Approved to UL60950, CSA C22.2 No. 60950, TUV EN60950				
Case material	Zn				
Material flammability	94 V-0				
Weight			80 (2.82) 470k		grams (ounces) hours
MTBF	MIL-HDBK-217F				
Operating temperature	Regular models - see derating curve.	-20		+71	°C
	Extended temperature models	-40		+85	°C
Storage temperature		-40		+105	°C
Humidity	Operating(non-condensing)	5%		95%	RH

SERIES: PTK15-T**DESCRIPTION:** screw terminal dc-dc converter**Single Output**

Side View

**Dual Output**

Side View



*DIN rail mounting kit available (part# STK-DIN)

PIN Definitions

+Vin:	Input positive terminal
-Vin:	Input negative terminal
CNT:	Remote On/Off control of output voltage. Referenced to -Vin
+Vout:	Main output positive terminal
-Vout:	Output negative terminal
Com:	Common node for dual- or triple-output models
Trim:	For trimming output voltage on single- or dual-output models
Case:	Connected to chassis

V-Infinity reserves the right to make changes to its products or to discontinue any product or service without notice, and to advise customers to verify the most up-to-date product information before placing orders. V-Infinity assumes no liability or responsibility for customer's applications using V-Infinity products other than repair or replacing (at V-I's option) V-Infinity products not meeting V-I's published specifications. Nothing will be covered outside of standard product warranty.