



# Normally – OFF Silicon Carbide Junction Transistor

 $\begin{array}{llll} V_{DS} & = & 1700 \ V \\ R_{DS(ON)} & = & 180 \ m\Omega \\ I_{D \ (Tc \ = \ 25^{\circ}C)} & = & 15 \ A \\ I_{D \ (Tc \ = \ 125^{\circ}C)} & = & 5 \ A \\ h_{FE \ (Tc \ = \ 25^{\circ}C)} & = & 100 \end{array}$ 


#### **Features**

- 175 °C Maximum Operating Temperature
- Gate Oxide Free SiC Switch
- Exceptional Safe Operating Area
- · Excellent Gain Linearity
- Temperature Independent Switching Performance
- Low Output Capacitance
- Positive Temperature Coefficient of R<sub>DS,ON</sub>
- Suitable for Connecting an Anti-parallel Diode

# **Advantages**

- Compatible with Si MOSFET/IGBT Gate Drive ICs
- > 20 µs Short-Circuit Withstand Capability
- Lowest-in-class Conduction Losses
- High Circuit Efficiency
- Minimal Input Signal Distortion
- High Amplifier Bandwidth

# **Package**







TO-247

# **Applications**

- Down Hole Oil Drilling, Geothermal Instrumentation
- Hybrid Electric Vehicles (HEV)
- Solar Inverters
- Switched-Mode Power Supply (SMPS)
- Power Factor Correction (PFC)
- Induction Heating
- Uninterruptible Power Supply (UPS)
- Motor Drives

# **Table of Contents**

Section I: Absolute Maximum Ratings	1
Section II: Static Electrical Characteristics	2
Section III: Dynamic Electrical Characteristics	2
Section IV: Figures	3
Section V: Driving the GA04JT17-247	7
Section VI: Package Dimensions	11
Section VII: SPICE Model Parameters	12

# **Section I: Absolute Maximum Ratings**

Parameter Symbol		Conditions	Value	Unit	Notes
Drain – Source Voltage	V <sub>DS</sub>	V <sub>GS</sub> = 0 V	1700	V	
Continuous Drain Current	I <sub>D</sub>	$T_C = 25^{\circ}C$	15	Α	Fig. 17
Continuous Drain Current	Ι <sub>D</sub>	T <sub>C</sub> = 160°C	4	Α	Fig. 17
Continuous Gate Current	I <sub>G</sub>		0.25	Α	
Turn-Off Safe Operating Area	RBSOA	T <sub>VJ</sub> = 175 °C, Clamped Inductive Load	$I_{D,max} = 4$ $  V_{DS} \le V_{DSmax} $	Α	Fig. 19
Short Circuit Safe Operating Area	SCSOA	$T_{VJ}$ = 175 °C, $I_G$ = 0.2 A, $V_{DS}$ = 1200 V, Non Repetitive	>20	μs	
Reverse Gate – Source Voltage	$V_{SG}$	·	30	V	
Reverse Drain – Source Voltage	$V_{SD}$		25	V	
Power Dissipation	P <sub>tot</sub>	$T_C = 25  ^{\circ}\text{C}  /  160  ^{\circ}\text{C},  t_p > 100  \text{ms}$	106 / 10	W	Fig. 16
Storage Temperature	T <sub>stg</sub>		-55 to 175	°C	



# **Section II: Static Electrical Characteristics**

Doromotor	Cumbal	Conditions	Value			I I m !4	M-1
Parameter	Symbol	Conditions	Min.	Min. Typical Max.		- Unit	Notes
A: On State							
Drain – Source On Resistance	$\begin{array}{c} I_D = 5 \text{ A}, \ T_j = 25 \text{ °C} \\ R_{DS(ON)} \qquad I_D = 5 \text{ A}, \ T_j = 150 \text{ °C} \\ I_D = 5 \text{ A}, \ T_j = 175 \text{ °C} \end{array}$			180 300 342		mΩ	Fig. 4
Gate – Source Saturation Voltage	$V_{GS,SAT}$	.b		3.45 3.22		V	Fig. 7
DC Current Gain	h <sub>FE</sub>	$V_{DS} = 8 \text{ V}, I_{D} = 5 \text{ A}, T_{J} = 25 \text{ °C}$ $V_{DS} = 8 \text{ V}, I_{D} = 5 \text{ A}, T_{J} = 125 \text{ °C}$ $V_{DS} = 8 \text{ V}, I_{D} = 5 \text{ A}, T_{J} = 175 \text{ °C}$		100 68 60		_	Fig. 5
B: Off State							
Drain Leakage Current	I <sub>DSS</sub>	$\begin{aligned} V_{DS} &= 1700 \text{ V}, \text{ V}_{GS} = 0 \text{ V}, \text{ T}_{j} = 25 \text{ °C} \\ V_{DS} &= 1700 \text{ V}, \text{ V}_{GS} = 0 \text{ V}, \text{ T}_{j} = 150 \text{ °C} \\ V_{DS} &= 1700 \text{ V}, \text{ V}_{GS} = 0 \text{ V}, \text{ T}_{j} = 175 \text{ °C} \end{aligned}$		0.1 0.1 0.5		μΑ	Fig. 8
Gate Leakage Current	$I_{SG}$	$V_{SG} = 20 \text{ V}, T_j = 25 \text{ °C}$		20		nA	
C: Thermal							
Thermal resistance, junction - case	$R_{thJC}$			1.41		°C/W	Fig. 20

# **Section III: Dynamic Electrical Characteristics**

D	0	Canditions		Value			Natar	
Parameter	Symbol	Conditions	Min.	Typical Max.		Unit	Notes	
A: Capacitance and Gate Charge	e							
Input Capacitance	C <sub>iss</sub>	V <sub>GS</sub> = 0 V, V <sub>DS</sub> = 1200 V, f = 1 MHz		665		pF	Fig. 9	
Reverse Transfer/Output Capacitance	C <sub>rss</sub> /C <sub>oss</sub>	$V_{DS} = 1200 \text{ V}, f = 1 \text{ MHz}$	16		pF	Fig. 9		
Output Capacitance Stored Energy	Eoss	$V_{GS} = 0 \text{ V}, V_{DS} = 1200 \text{ V}, f = 1 \text{ MHz}$		15		μJ	Fig. 10	
Effective Output Capacitance, time related	$C_{\text{oss,tr}}$	$I_D$ = constant, $V_{GS}$ = 0 V, $V_{DS}$ = 01200 V		29		pF		
Effective Output Capacitance, energy related	$C_{\text{oss,er}}$	V <sub>GS</sub> = 0 V, V <sub>DS</sub> = 01200 V		21		pF		
Gate-Source Charge	$Q_GS$	V <sub>GS</sub> = -53 V		5		nC		
Gate-Drain Charge	$Q_{GD}$	$V_{GS} = 0 \text{ V}, V_{DS} = 01200 \text{ V}$		35		nC		
Gate Charge - Total	$Q_G$			40		nC		
B: Switching <sup>1</sup>								
Internal Gate Resistance – zero bias	$R_{G(INT\text{-}ZERO)}$	$f = 1 \text{ MHz}, V_{AC} = 50 \text{ mV}, V_{DS} = 0 \text{ V}, V_{GS} = 0 \text{ V}, T_i = 175 ^{\circ}\text{C}$		5.9		Ω		
Internal Gate Resistance – ON	$R_{G(INT-ON)}$	$V_{GS} > 2.5 \text{ V}, V_{DS} = 0 \text{ V}, T_j = 175 ^{\circ}\text{C}$		0.32		Ω		
Turn On Delay Time	$t_{d(on)}$	_T <sub>i</sub> = 25 °C, V <sub>DS</sub> = 1200 V,		10		ns		
Fall Time, V <sub>DS</sub>	t <sub>f</sub>	_I <sub>D</sub> = 4 A, Resistive Load		10		ns	Fig. 11, 13	
Turn Off Delay Time t <sub>d(o</sub>		Refer to Section V for additional		19		ns		
Rise Time, V <sub>DS</sub>	t <sub>r</sub>	driving information.		15		ns	Fig. 12, 14	
Turn On Delay Time	$t_{d(on)}$	<u>_</u> .		10		ns		
Fall Time, V <sub>DS</sub>	t <sub>f</sub>	$T_j = 175 ^{\circ}\text{C},  V_{DS} = 1200 \text{V},$		8		ns	Fig. 11	
Turn Off Delay Time	$t_{d(off)}$	I <sub>D</sub> = 4 A, Resistive Load		29		ns		
Rise Time, V <sub>DS</sub>	t <sub>r</sub>			16		ns	Fig. 12	
Turn-On Energy Per Pulse	Eon	$T_i = 25  {}^{\circ}\text{C},  V_{DS} = 1200  \text{V},$		116		μJ	Fig. 11, 13	
Turn-Off Energy Per Pulse	E <sub>off</sub>	I <sub>D</sub> = 4 A, Inductive Load		14		μJ	Fig. 12, 14	
Total Switching Energy	E <sub>tot</sub>	Refer to Section V.		130		μJ	•	
Turn-On Energy Per Pulse	E <sub>on</sub>	T 475.00 V 4000 V		113		μJ	Fig. 11	
Turn-Off Energy Per Pulse	E <sub>off</sub>	$T_j = 175 ^{\circ}\text{C},  V_{DS} = 1200 ^{\circ}\text{V},$		16		μJ	Fig. 12	
Total Switching Energy	E <sub>tot</sub>	——I <sub>D</sub> = 4 A, Inductive Load —		129	_	μJ		

 $<sup>^{\</sup>rm 1}$  – All times are relative to the Drain-Source Voltage  $V_{\rm DS}$ 



# **Section IV: Figures**

## A: Static Characteristics




Figure 1: Typical Output Characteristics at 25 °C




Figure 3: Typical Output Characteristics at 175 °C




Figure 5: DC Current Gain and Normalized On-Resistance vs. Temperature




Figure 2: Typical Output Characteristics at 150 °C




Figure 4: On-Resistance vs. Gate Current




Figure 6: DC Current Gain vs. Drain Current






Figure 7: Typical Gate - Source Saturation Voltage




Figure 8: Typical Blocking Characteristics

# **B: Dynamic Characteristics**




Figure 9: Input, Output, and Reverse Transfer Capacitance




Figure 10: Energy Stored in Output Capacitance




Figure 11: Typical Switching Times and Turn On Energy Losses vs. Temperature




Figure 12: Typical Switching Times and Turn Off Energy Losses vs. Temperature






Figure 13: Typical Switching Times and Turn On Energy Losses vs. Drain Current




Figure 14: Typical Switching Times and Turn Off Energy Losses vs. Drain Current

# C: Current and Power Derating




Figure 15: Typical Hard Switched Device Power Loss vs. Switching Frequency <sup>2</sup>




Figure 16: Power Derating Curve




Figure 17: Drain Current Derating vs. Temperature




Figure 18: Forward Bias Safe Operating Area at  $T_c$ = 25  $^{\circ}$ C

<sup>&</sup>lt;sup>2</sup> – Representative values based on device conduction and switching loss. Actual losses will depend on gate drive conditions, device load, and circuit topology.




Figure 19: Turn-Off Safe Operating Area




Figure 20: Transient Thermal Impedance




Figure 21: Drain Current Derating vs. Pulse Width



Section V: Driving the GA04JT17-247

Drive Topology	Gate Drive Power Consumption	Switching Frequency	Application Emphasis	Availability	
TTL Logic	High	Low	Wide Temperature Range	Coming Soon	
Constant Current	Medium	Medium Wide Temperature Range		Coming Soon	
High Speed – Boost Capacitor	Medium	High	Fast Switching	Production	
High Speed – Boost Inductor	Low	High	Ultra Fast Switching	Coming Soon	
Proportional	Lowest	High	Wide Drain Current Range	Coming Soon	
Pulsed Power	Medium	N/A	Pulse Power	Coming Soon	

# A: Static TTL Logic Driving

The GA04JT17-247 may be driven using direct (5 V) TTL logic after current amplification. The (amplified) current level of the supply must meet or exceed the steady state gate current ( $I_{G,steady}$ ) required to operate the GA04JT17-247. The power level of the supply can be estimated from the target duty cycle of the particular application.  $I_{G,steady}$  is dependent on the anticipated drain current ID through the SJT and the DC current gain  $h_{FE}$ , it may be calculated from the following equation. An accurate value of the  $h_{FE}$  may be read from Figure 6.

$$I_{G,steady} \approx \frac{I_D}{h_{FE}(T, I_D)} * 1.5$$




Figure 22: TTL Gate Drive Schematic

# **B: High Speed Driving**

The SJT is a current controlled transistor which requires a positive gate current for turn-on as well as to remain in on-state. An ideal gate current waveform for ultra-fast switching of the SJT, while maintaining low gate drive losses, is shown in Figure 23 which features a positive current peak during turn-on, a negative current peak during turn-off, and continuous gate current to remain on.




Figure 23: An idealized gate current waveform for fast switching of an SJT.

An SJT is rapidly switched from its blocking state to on-state, when the necessary gate charge, Q<sub>G</sub>, for turn-on is supplied by a burst of high gate current, I<sub>G,on</sub>, until the gate-source capacitance, C<sub>GS</sub>, and gate-drain capacitance, C<sub>GD</sub>, are fully charged.

$$Q_{on} = I_{G,on} * t_1$$

$$Q_{on} \ge Q_{as} + Q_{ad}$$



Ideally,  $I_{G,pon}$  should terminate when the drain voltage falls to its on-state value in order to avoid unnecessary drive losses during the steady on-state. In practice, the rise time of the  $I_{G,on}$  pulse is affected by the parasitic inductances,  $L_{par}$  in the device package and drive circuit. A voltage developed across the parasitic inductance in the source path,  $L_s$ , can de-bias the gate-source junction, when high drain currents begin to flow through the device. The voltage applied to the gate pin should be maintained high enough, above the  $V_{GS,sat}$  (see Figure 7) level to counter these effects.

A high negative peak current,  $-I_{G,off}$  is recommended at the start of the turn-off transition, in order to rapidly sweep out the injected carriers from the gate, and achieve rapid turn-off. While satisfactory turn off can be achieved with  $V_{GS} = 0$  V, a negative gate voltage  $V_{GS}$  may be used in order to speed up the turn-off transition.

Two high-speed drive topologies for the SiC SJTs are presented below.

#### B:1: High Speed, Low Loss Drive with Boost Capacitor, GA03IDDJT30-FR4

The GA04JT17-247 may be driven using a High Speed, Low Loss Drive with Boost Capacitor topology in which multiple voltage levels, a gate resistor, and a gate capacitor are used to provide fast switching current peaks at turn-on and turn-off and a continuous gate current while in on-state. A 3 kV isolated evaluation gate drive board (GA03IDDJT30-FR4) utilizing this topology is commercially available for high and low-side driving, its datasheet provides additional details about this drive topology.

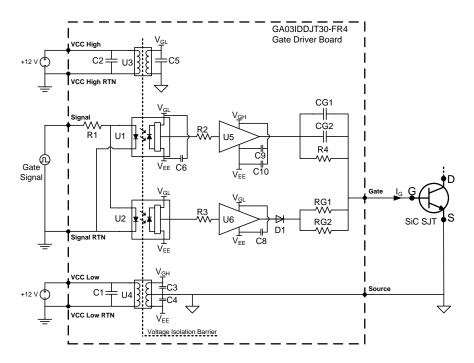


Figure 24: Topology of the GA03IDDJT30-FR4 Two Voltage Source gate driver.

The GA03IDDJT30-FR4 evaluation board comes equipped with two on board gate drive resistors (RG1, RG2) pre-installed for an effective gate resistance<sup>3</sup> of  $R_G = 3.75\,\Omega$ . It may be necessary for the user to reduce RG1 and RG2 under high drain current conditions for safe operation of the GA04JT17-247. The steady state current supplied to the gate pin of the GA04JT17-247 with on-board  $R_G = 3.75\,\Omega$ , is shown in Figure 25. The maximum allowable safe value of  $R_G$  for the user's required drain current can be read from Figure 26.

#### For the GA04JT17-247, R<sub>G</sub> must be reduced for I<sub>D</sub> ≥ ~8 A for safe operation with the GA03IDDJT30-FR4.

For operation at  $I_D \ge -8$  A,  $R_G$  may be calculated from the following equation, which contains the DC current gain  $h_{FE}$  (Figure 6) and the gate-source saturation voltage  $V_{GS,sat}$  (Figure 7).

$$R_{G,max} = \frac{\left(4.7V - V_{GS,sat}\right) * h_{FE}(T, I_D)}{I_D * 1.5} - 0.6\Omega$$




Figure 25: Typical steady state gate current supplied by the GA03IDDJT30-FR4 board for the GA04JT17-247 with the on board resistance of 3.75  $\Omega\,$ 




Figure 26: Maximum gate resistance for safe operation of the GA04JT17-247 at different drain currents using the GA03IDDJT30-FR4 board.

## B:2: High Speed, Low Loss Drive with Boost Inductor

A High Speed, Low-Loss Driver with Boost Inductor is also capable of driving the GA04JT17-247 at high-speed. It utilizes a gate drive inductor instead of a capacitor to provide the high-current gate current pulses  $I_{G,on}$  and  $I_{G,off}$ . During operation, inductor L is charged to a specified  $I_{G,on}$  current value then made to discharge  $I_L$  into the SJT gate pin using logic control of  $S_1$ ,  $S_2$ ,  $S_3$ , and  $S_4$ , as shown in Figure 27. After turn on, while the device remains on the necessary steady state gate current  $I_{G,steady}$  is supplied from source VCC through RG. Please refer to the article "A current-source concept for fast and efficient driving of silicon carbide transistors" by Dr. Jacek Rąbkowski for additional information on this driving topology.<sup>4</sup>




Figure 27: Simplified Inductive Pulsed Drive Topology

 $<sup>^3</sup>$  – R<sub>G</sub> =  $(1/RG1 + 1/RG2)^{-1}$ . Driver is pre-installed with RG1 = RG2 = 7.5  $\Omega$ 

<sup>&</sup>lt;sup>4</sup> - Archives of Electrical Engineering. Volume 62, Issue 2, Pages 333-343, ISSN (Print) 0004-0746, DOI: 10.2478/aee-2013-0026, June 2013



#### C: Proportional Gate Current Driving

For applications in which the GA04JT17-247 will operate over a wide range of drain current conditions, it may be beneficial to drive the device using a proportional gate drive topology to optimize gate drive power consumption. A proportional gate driver relies on instantaneous drain current I<sub>D</sub> feedback to vary the steady state gate current I<sub>G,steady</sub> supplied to the GA04JT17-247

#### C:1: Voltage Controlled Proportional Driver

The voltage controlled proportional driver relies on a gate drive IC to detect the GA04JT17-247 drain-source voltage  $V_{DS}$  during on-state to sense  $I_D$ . The gate drive IC will then increase or decrease  $I_{G,steady}$  in response to  $I_D$ . This allows  $I_{G,steady}$ , and thus the gate drive power consumption, to be reduced while  $I_D$  is relatively low or for  $I_{G,steady}$  to increase when is  $I_D$  higher. A high voltage diode connected between the drain and sense protects the IC from high-voltage when the driver and GA04JT17-247 are in off-state. A simplified version of this topology is shown in Figure 29, additional information will be available in the future at http://www.genesicsemi.com/commercial-sic/sic-junction-transistors/

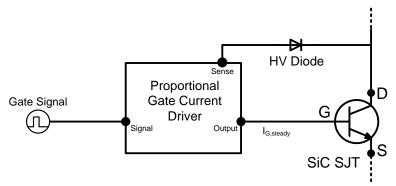


Figure 28: Simplified Voltage Controlled Proportional Driver

#### C:2: Current Controlled Proportional Driver

The current controlled proportional driver relies on a low-loss transformer in the drain or source path to provide feedback  $I_D$  of the GA04JT17-247 during on-state to supply  $I_{G,steady}$  into the device gate.  $I_{G,steady}$  will then increase or decrease in response to  $I_D$ . at a fixed forced current gain which is set be the turns ratio of the transformer,  $h_{force} = I_D / I_G = N_2 / N_1$ . GA04JT17-247 is initially tuned-on using a gate current pulse supplied into an RC drive circuit to allow  $I_D$  current to begin flowing. This topology allows  $I_{G,steady}$ , and thus the gate drive power consumption, to be reduced while  $I_D$  is relatively low or for  $I_{G,steady}$  to increase when is  $I_D$  higher. A simplified version of this topology is shown in Figure 29, additional information will be available in the future at http://www.genesicsemi.com/commercial-sic/sic-junction-transistors/.





Figure 29: Simplified Current Controlled Proportional Driver



# **Section VI: Package Dimensions**

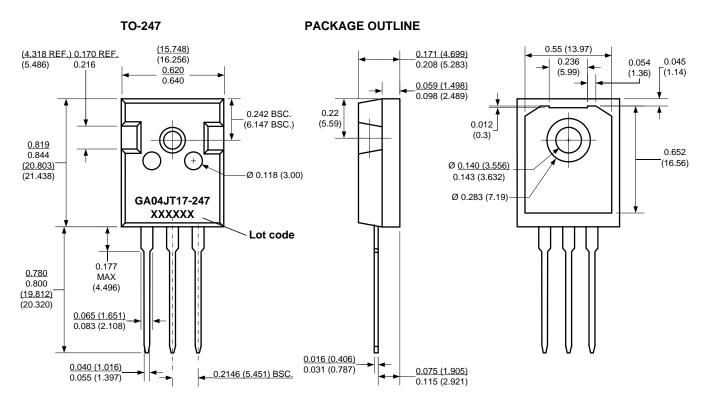

#### NOTE

- 1. CONTROLLED DIMENSION IS INCH. DIMENSION IN BRACKET IS MILLIMETER.
- 2. DIMENSIONS DO NOT INCLUDE END FLASH, MOLD FLASH, MATERIAL PROTRUSIONS

Revision History						
Date	Revision	Comments	Supersedes			
2015/01/28	8	Updated Electrical Characteristics				
2014/11/13	7	Updated Electrical Characteristics				
2014/08/22	6	Updated Electrical Characteristics				
2014/02/05	5	Updated Electrical Characteristics				
2013/12/18	4	Updated Gate Drive Section				

Published by GeneSiC Semiconductor, Inc. 43670 Trade Center Place Suite 155 Dulles, VA 20166

GeneSiC Semiconductor, Inc. reserves right to make changes to the product specifications and data in this document without notice.

GeneSiC disclaims all and any warranty and liability arising out of use or application of any product. No license, express or implied to any intellectual property rights is granted by this document.

Unless otherwise expressly indicated, GeneSiC products are not designed, tested or authorized for use in life-saving, medical, aircraft navigation, communication, air traffic control and weapons systems, nor in applications where their failure may result in death, personal injury and/or property damage.



# **Section VII: SPICE Model Parameters**

This is a secure document. Please copy this code from the SPICE model PDF file on our website (http://www.genesicsemi.com/images/products\_sic/sjt/GA04JT17-247\_SPICE.pdf) into LTSPICE (version 4) software for simulation of the GA04JT17-247.

```
MODEL OF GeneSiC Semiconductor Inc.
     $Revision:
                   2.1
                                  $
     $Date:
               30-JAN-2015
                                  $
     GeneSiC Semiconductor Inc.
     43670 Trade Center Place Ste. 155
     Dulles, VA 20166
     COPYRIGHT (C) 2015 GeneSiC Semiconductor Inc.
     ALL RIGHTS RESERVED
* These models are provided "AS IS, WHERE IS, AND WITH NO WARRANTY
 OF ANY KIND EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED
* TO ANY IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A
* PARTICULAR PURPOSE."
 Models accurate up to 2 times rated drain current.
.model GA04JT17 NPN
+ IS
           9.8338E-48
+ ISE
           1.0733E-26
+ EG
           3.23
           125
+ BF
           0.55
+ BR
           5000
+ IKF
+ NF
           2.
+ NE
+ RB
           10.49
+ IRB
           0.002
+ RBM
           0.32
           0.003
+ RE
+ RC
           0.16
+ CJC
           254E-12
           3.0423
+ VJC
+ MJC
           0.4619
           649.0E-1209
+ CJE
           2.8800
+ VJE
           0.4813
+ MJE
+ XTI
           3
           -1.5
+ XTB
+ TRC1
           6.5E-3
+ VCEO
           1700
+ ICRATING 4
 MFG
           GeneSiC_Semiconductor
```

End of GA04JT17 SPICE Model

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

GeneSiC Semiconductor:

GA04JT17-247