

# General purpose transistor (isolated transistor and diode)

## QSL12

A 2SD2675 and a RB461F are housed independently in a TSMT5 package.

**●Applications**

DC / DC converter  
Motor driver


**●Features**

- 1) Tr : Low  $V_{CE(sat)}$   
Di : Low  $V_f$
- 2) Small package

**●Structure**

Silicon epitaxial planar transistor  
Schottky barrier diode


**●Equivalent circuit**



**●Packaging specifications**

Type	QSL12
Package	TSMT5
Marking	L12
Code	TR
Basic ordering unit(pieces)	3000

**●External dimensions (Unit : mm)**

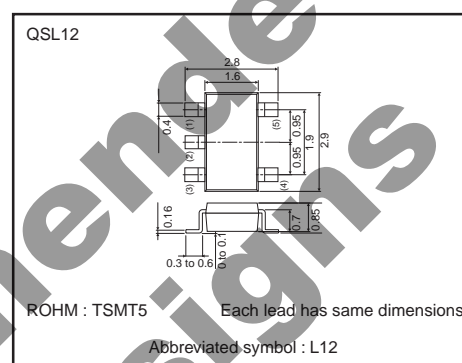

Transistors

●Absolute maximum ratings (Ta=25°C)

Tr1

Parameter	Symbol	Limits	Unit
Collector-base voltage	V <sub>CB0</sub>	30	V
Collector-emitter voltage	V <sub>CEO</sub>	30	V
Emitter-base voltage	V <sub>EB0</sub>	6	V
Collector current	I <sub>c</sub>	1	A
	I <sub>CP</sub>	2	A *1
Power dissipation	P <sub>c</sub>	0.9	W/ELEMENT *2
Junction temperature	T <sub>j</sub>	150	°C
Range of storage temperature	T <sub>stg</sub>	-40 to +125	°C

\*1 Single pulse, Pw=1ms

\*2 Mounted on a 25mm×25mm×0.8mm ceramic substrate

Di2

Parameter	Symbol	Limits	Unit
Peak reverse voltage	V <sub>RM</sub>	25	V
Reverse voltage (DC)	V <sub>R</sub>	20	V
Average rectified forward current	I <sub>F</sub>	700	mA
Forward current surge peak (60Hz, 1∞)	I <sub>FSM</sub>	3	A
Power dissipation	P <sub>D</sub>	0.7	W/ELEMENT *
Junction temperature	T <sub>j</sub>	125	°C
Range of storage temperature	T <sub>stg</sub>	-40 to +125	°C

\* Mounted on a 25mm×25mm×0.8mm ceramic substrate

Tr1&Di2

Parameter	Symbol	Limits	Unit
Total power dissipation	P <sub>D</sub>	0.5	W/TOTAL *1
		1.25	W/TOTAL *2

\*1 Each terminal mounted on a recommended land.

\*2 Mounted on a 25mm×25mm×0.8mm ceramic substrate.

●Electrical characteristics (Ta=25°C)

Tr1

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Collector-base breakdown voltage	BV <sub>CB0</sub>	30	-	-	V	I <sub>c</sub> =10μA
Collector-emitter breakdown voltage	BV <sub>CEO</sub>	30	-	-	V	I <sub>c</sub> =1mA
Emitter-base breakdown voltage	BV <sub>EB0</sub>	6	-	-	V	I <sub>E</sub> =10μA
Collector cutoff current	I <sub>CB0</sub>	-	-	100	nA	V <sub>CB</sub> =30V
Emitter cutoff current	I <sub>EB0</sub>	-	-	100	nA	V <sub>EB</sub> =6V
Collector-emitter saturation voltage	V <sub>CE(sat)</sub>	-	120	350	mV	I <sub>c</sub> /I <sub>B</sub> =500mA/25mA
DC current gain	h <sub>FE</sub>	270	-	680	-	V <sub>CE</sub> /I <sub>c</sub> =2V/100mA *
Transition frequency	f <sub>r</sub>	-	320	-	MHz	V <sub>CE</sub> =2V, I <sub>E</sub> =-100mA, f=100MHz *
Collector output capacitance	C <sub>ob</sub>	-	7	-	pF	V <sub>CB</sub> =10V, I <sub>E</sub> =0A, f=1MHz

\* Pulsed

Di2

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Forward voltage	V <sub>F</sub>	-	450	490	mV	I <sub>F</sub> =700mA
Reverse current	I <sub>R</sub>	-	-	200	μA	V <sub>R</sub> =20V
Reverse recovery time	t <sub>rr</sub>	-	9	-	ns	I <sub>F</sub> =I <sub>R</sub> =100mA, I <sub>rr</sub> =0.1I <sub>R</sub>

Transistors

●Electrical characteristic curves

Tr1

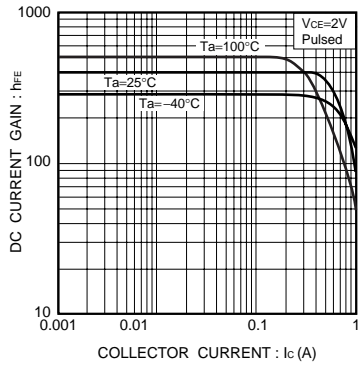


Fig.1 DC current gain vs. collector current

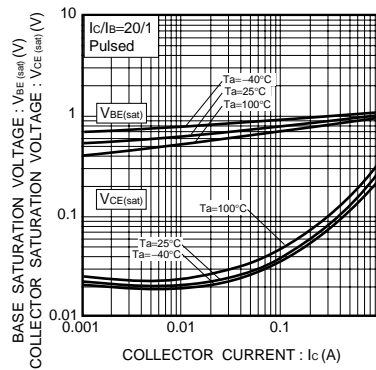


Fig.2 Collector-emitter saturation voltage base-emitter saturation voltage vs. collector current

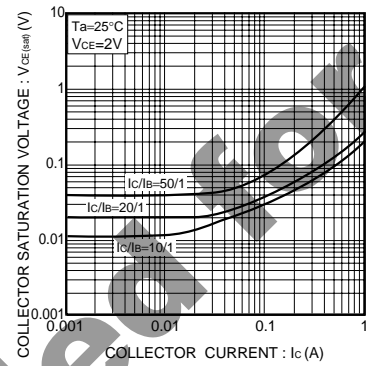


Fig.3 Collector-emitter saturation voltage vs. collector current

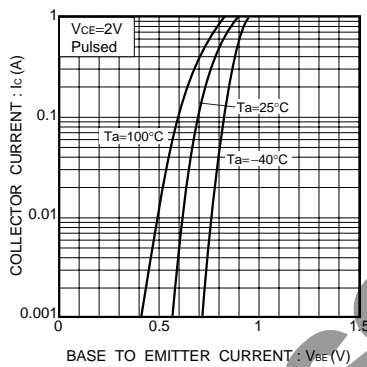


Fig.4 Grounded emitter propagation characteristics

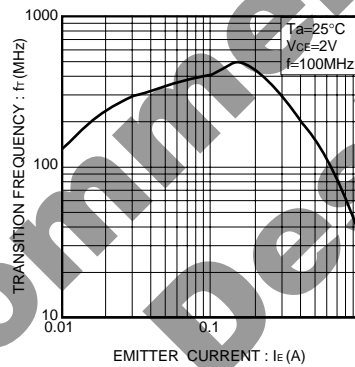


Fig.5 Gain bandwidth product vs. emitter current

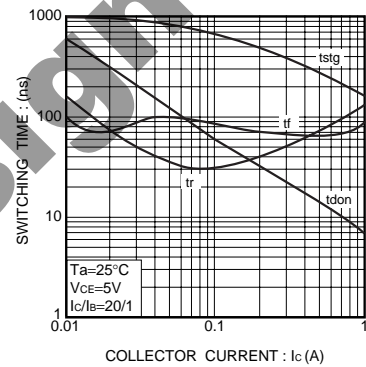


Fig.6 Switching time

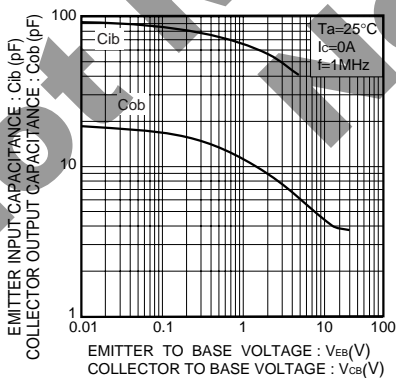


Fig.7 Collector output capacitance vs. collector-base voltage  
Emitter input capacitance vs. emitter-base voltage

Transistors

Di2

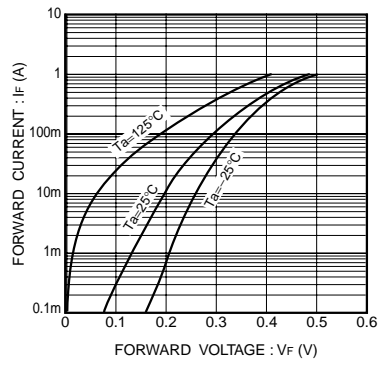


Fig.8 Forward characteristics

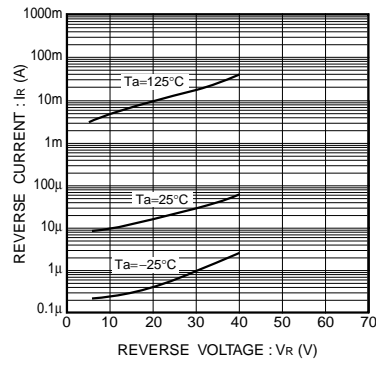


Fig.9 Reverse characteristics

Not Recommended for New Designs

### Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the product described in this document are for reference only. Upon actual use, therefore, please request that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

#### About Export Control Order in Japan

Products described herein are the objects of controlled goods in Annex 1 (Item 16) of Export Trade Control Order in Japan.

In case of export from Japan, please confirm if it applies to "objective" criteria or an "informed" (by MITI clause) on the basis of "catch all controls for Non-Proliferation of Weapons of Mass Destruction.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ROHM Semiconductor:](#)

[QSL12TR](#)