


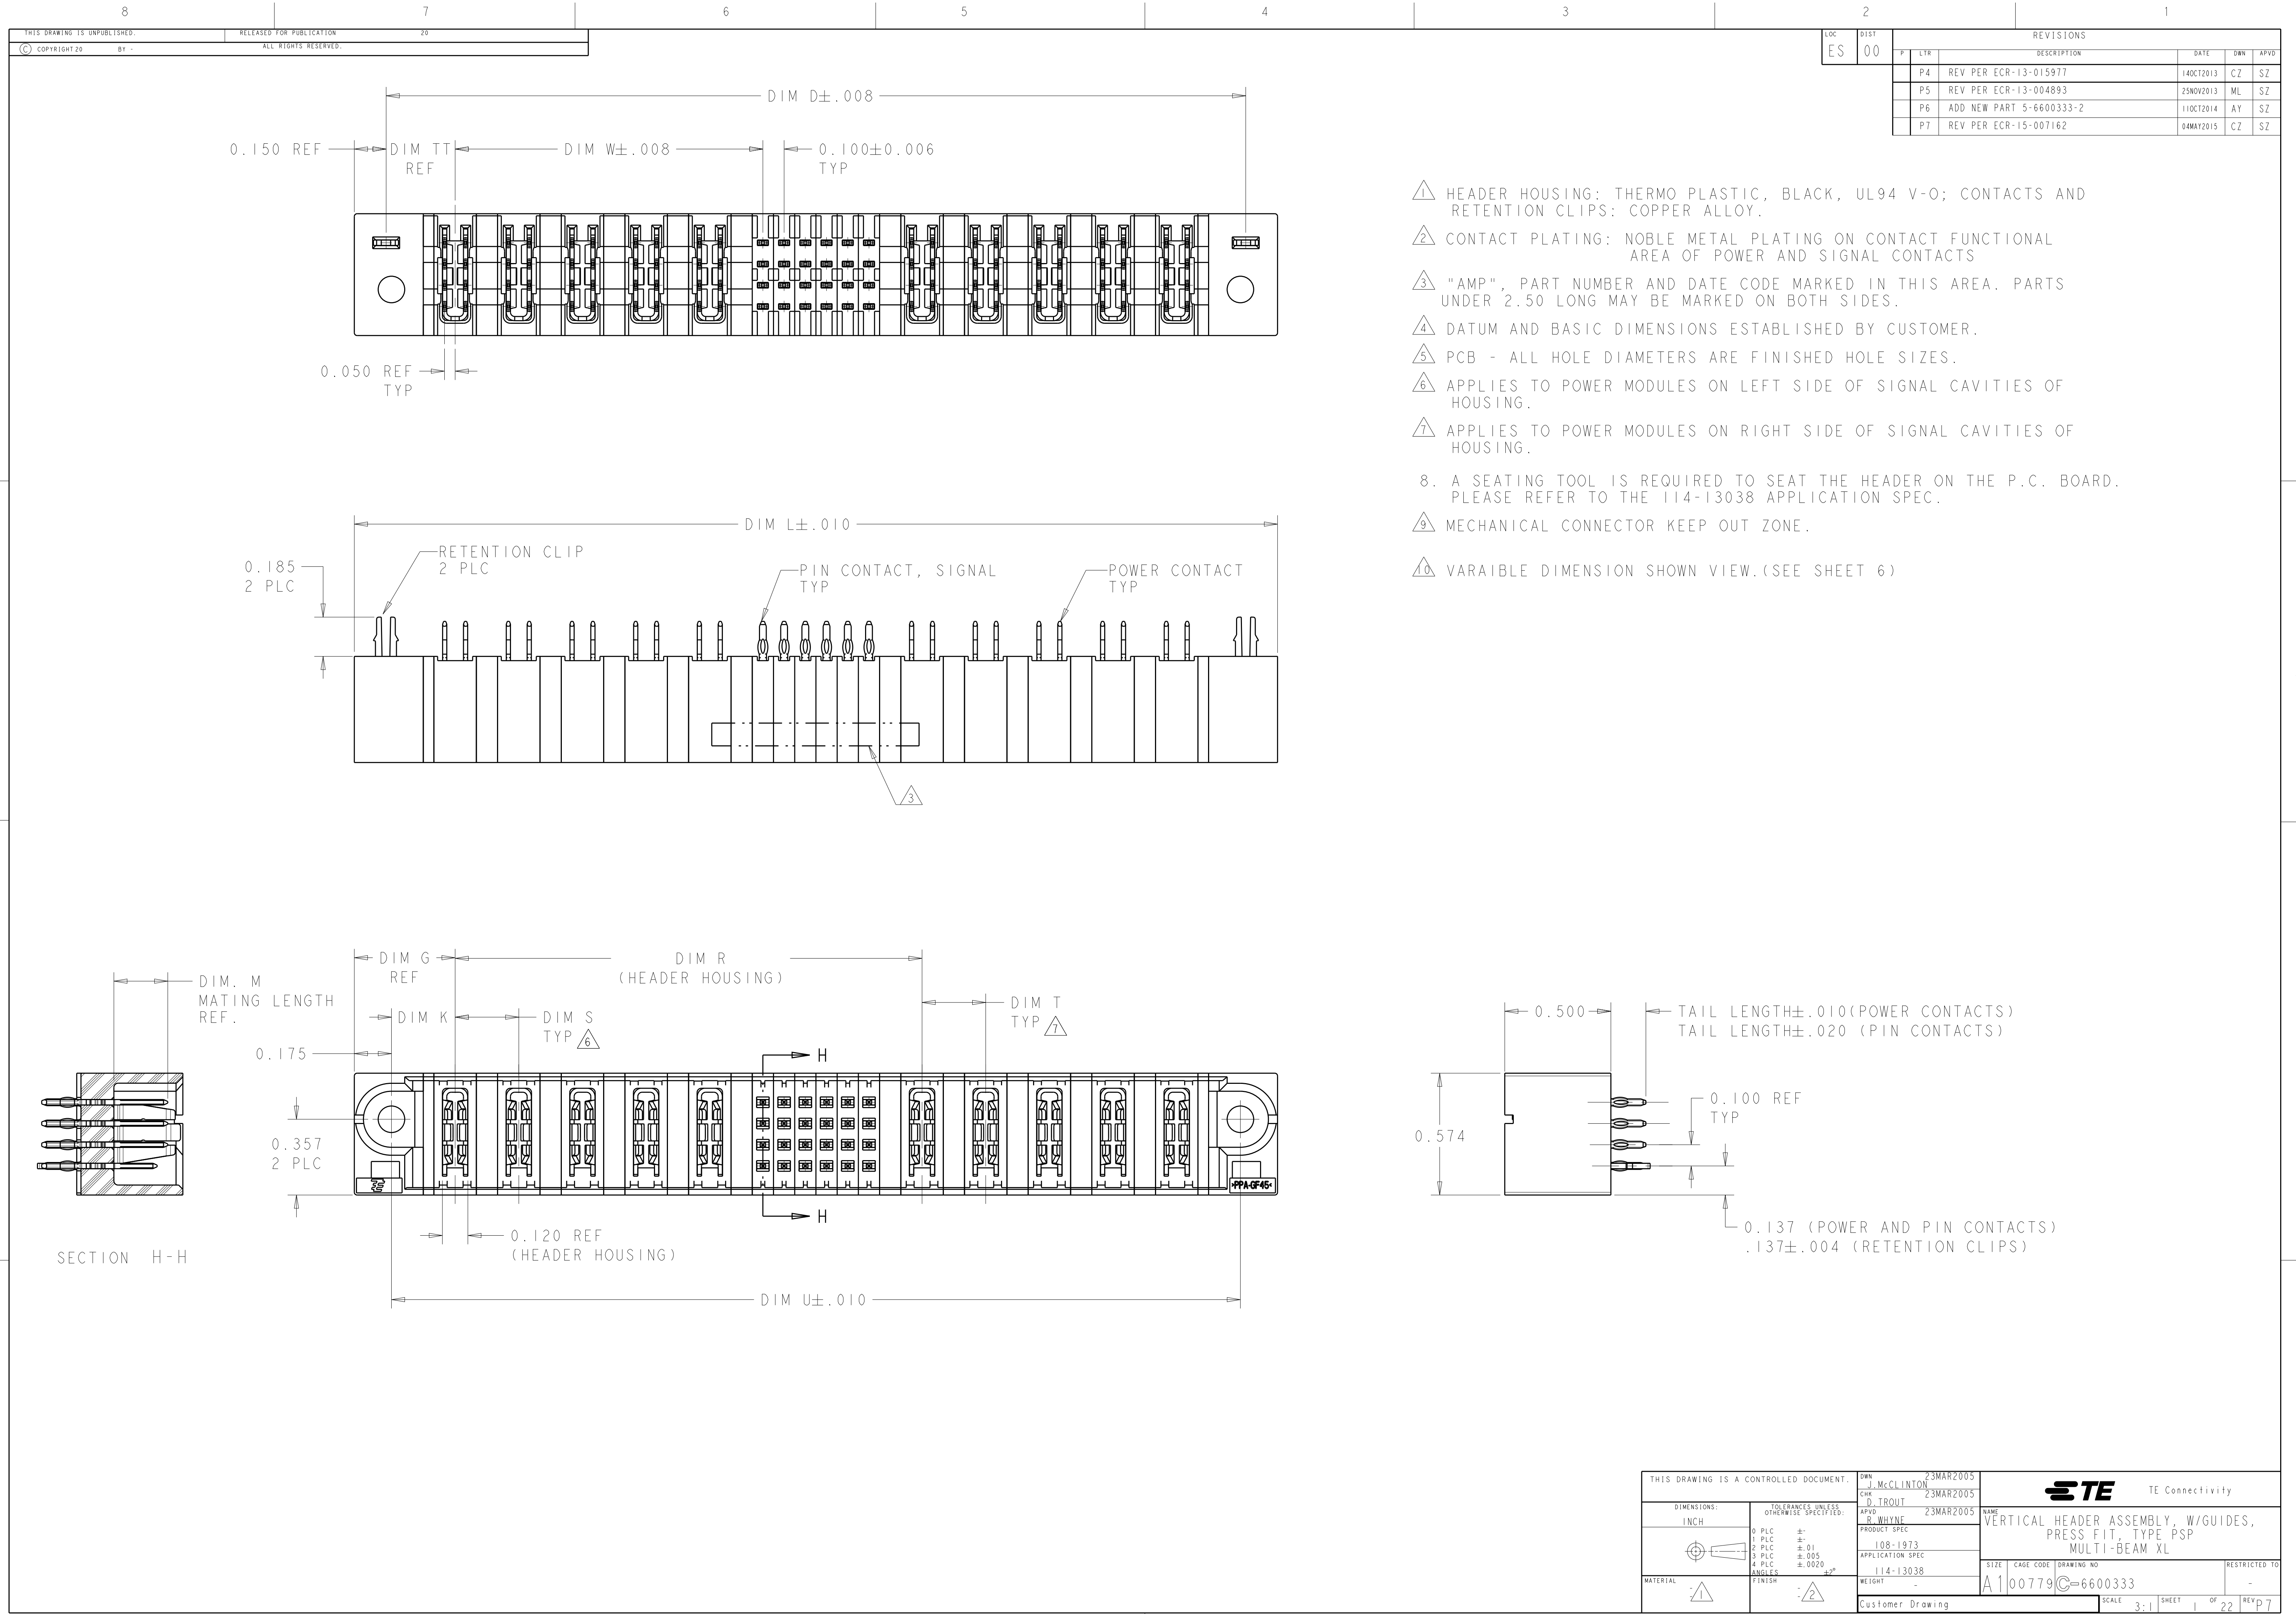


LOC	DIST	REVISIONS						
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD	
		P4	REV PER ECR-13-015977	14OCT2013	CZ	SZ		
		P5	REV PER ECR-13-004893	25NOV2013	ML	SZ		
		P6	ADD NEW PART 5-6600333-2	11OCT2014	AY	SZ		
		P7	REV PER ECR-15-007162	04MAY2015	CZ	SZ		

1. HEADER HOUSING: THERMO PLASTIC, BLACK, UL94 V-O; CONTACTS AND RETENTION CLIPS: COPPER ALLOY.
2. CONTACT PLATING: NOBLE METAL PLATING ON CONTACT FUNCTIONAL AREA OF POWER AND SIGNAL CONTACTS
3. "AMP", PART NUMBER AND DATE CODE MARKED IN THIS AREA. PARTS UNDER 2.50 LONG MAY BE MARKED ON BOTH SIDES.
4. DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
5. PCB - ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
6. APPLIES TO POWER MODULES ON LEFT SIDE OF SIGNAL CAVITIES OF HOUSING.
7. APPLIES TO POWER MODULES ON RIGHT SIDE OF SIGNAL CAVITIES OF HOUSING.
8. A SEATING TOOL IS REQUIRED TO SEAT THE HEADER ON THE P.C. BOARD. PLEASE REFER TO THE 114-13038 APPLICATION SPEC.
9. MECHANICAL CONNECTOR KEEP OUT ZONE.
10. VARAIBLE DIMENSION SHOWN VIEW.(SEE SHEET 6)

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. McCLINTON 23MAR2005	TE Connectivity	
DIMENSIONS: INCH		CHK D. TROUT 23MAR2005		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD R. WHYNE 23MAR2005	NAME VERTICAL HEADER ASSEMBLY, W/GUIDES, PRESS FIT, TYPE PSP MULTI-BEAM XL	
0 PLC $\pm .$		PRODUCT SPEC	SIZE	
1 PLC $\pm .01$		108-1973	CAGE CODE	
2 PLC $\pm .01$		APPLICATION SPEC	DRAWING NO	
3 PLC $\pm .005$		114-13038	A100779	
4 PLC $\pm .0020$		WEIGHT	C=6600333	
ANGLES $\neq 2^\circ$		Customer Drawing	RESTRICTED TO	
FINISH		SCALE 3:1	SHEET 1 OF 22	
MATERIAL		REV P7		

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

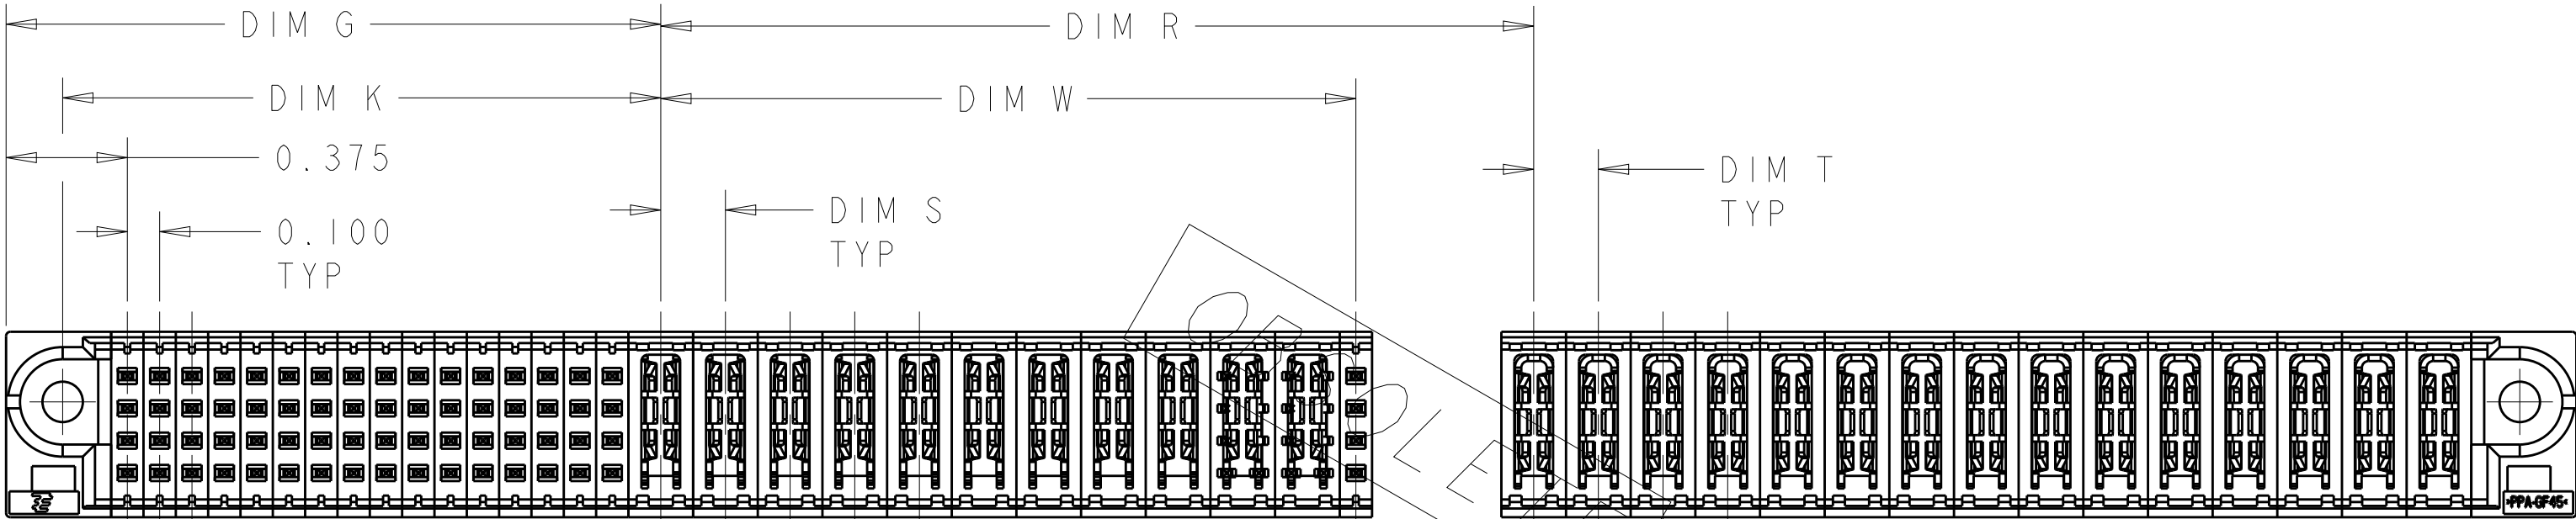

PART NUMBER 2-6600333-3
UNSPECIFIED REFER TO TEH SHEET 1

P6	.300	.425	2.500	.250	.250	1.700	2.850	.275	.450	2.550	NO	2P + 48S + 2P	5-6600333-2
	.300	1.425	4.250	.250	.250	2.700	4.600	.275	.450	4.300	NO	6P + 48S + 5P	5-6600333-1
P1	.300	.425	2.400	.250	.250	1.100	2.750	.275	.450	2.450	NO	2P + 24S + 4P	5-6600333-0
	.300	.175	1.100	-	-	.550	1.450	.275	.450	1.150	YES	1P + 12S + 1P	4-6600333-9
N7	.300	1.225	4.000	.250	.250	2.200	4.350	.275	.450	4.057	NO	5P + 24S + 6P	4-6600333-8
	.300	.925	2.600	.250	.250	1.300	2.950	.275	.450	2.650	YES	4P + 12S + 4P	4-6600333-6
N3	.300	.925	2.600	.250	.250	1.300	2.950	.275	.450	2.650	YES	4P + 12S + 4P	4-6600333-6
	.325	.550	2.200	.300	.300	1.300	2.550	.300	.475	2.250	YES	2ACP + 24S+ 2ACP	4-6600333-5
N5	.300	.425	1.900	.250	.250	1.100	2.250	.275	.450	1.950	YES	2P + 24S + 2P	4-6600333-4
	.325	.550	2.200	.300	.300	1.300	2.550	.300	.475	2.250	YES	2ACP + 24S + 2ACP	4-6600333-3
N4	.300	1.925	4.700	.250	.250	2.400	5.050	.275	.450	4.750	YES	8P + 16S + 8P	4-6600333-2
	.300	.425	1.600	.250	.250	.800	1.950	.275	.450	1.650	YES	2P + 12S + 2P	4-6600333-1
	.325	.850	2.800	.300	.300	1.600	3.150	.300	.475	2.850	YES	3ACP + 24S + 3ACP	3-6600333-9
	.300	1.425	3.500	.250	.250	1.700	3.850	.275	.450	3.550	YES	6P + 8S + 6P	3-6600333-8
	.300	.475	2.000	.250	.250	1.200	2.350	.275	.450	2.050	YES	2P + 24S + 2P	3-6600333-7
	.300	.925	3.700	.250	.250	2.400	4.050	.275	.450	3.750	NO	4P + 56S + 4P	3-6600333-6
	.300	.675	2.400	.250	.250	1.350	2.750	.275	.450	2.450	YES	3P + 24S + 3P	3-6600333-5
	.300	.925	2.500	.250	.250	1.200	2.850	.275	.450	2.550	YES	4P + 8S + 4P	3-6600333-4
	.300	.925	2.700	.250	.250	1.400	3.050	.275	.450	2.750	NO	4P + 16S + 4P	3-6600333-3
	.300	.925	2.900	.250	.250	1.600	3.250	.275	.450	2.950	NO	4P + 24S + 4P	3-6600333-2
	.325	1.750	4.800	.250	.300	2.475	5.150	.300	.475	4.850	YES	6ACP + 24S + 8P	3-6600333-1
	.300	.225	1.300	-	-	.750	1.650	.275	.450	1.350	YES	1P + 16S + 1P	3-6600333-0
	.300	.425	2.100	-	.250	1.300	2.450	.275	.450	2.150	YES	2P + 32S + 2P	2-6600333-9
	.300	.925	2.450	.250	.250	1.400	2.800	.275	.450	2.500	YES	4P + 16S + 3P	2-6600333-8
	.300	.975	3.250	.250	.250	1.700	3.600	.275	.450	3.300	YES	4P + 24S + 5P	2-6600333-7
	.300	.675	2.400	.250	.250	1.350	2.750	.275	.450	2.450	YES	3P + 24S + 3P	2-6600333-6
	.300	.925	2.450	.250	.250	1.400	2.800	.275	.450	2.500	YES	4P + 16S + 3P	2-6600333-5
	.275	2.000	5.450			2.650	5.800	.250	.425	5.500	YES	10P + 24S + 12P	2-6600333-4
ETE	1.875	2.150	7.600	.200	.200	2.700	7.950	1.850	2.025	7.650	YES	64S+11P+20S+15P	2-6600333-3
	.275	2.000	5.450			2.650	5.800	.250	.425	5.500	YES	10P + 24S + 12P	2-6600333-2
	.325	1.750	4.800	.250	.300	2.475	5.150	.300	.475	4.850	YES	6ACP + 24S + 8P	2-6600333-1
	.300	.475	2.000	.250	.250	1.200	2.350	.275	.450	2.050	YES	2P + 24S + 2P	1-6600333-6
	.300	1.425	3.900	.250	.250	2.100	4.250	.275	.450	3.950	YES	6P + 24S + 6P	1-6600333-5
	.300	.975	3.200	.250	.250	1.900	3.550	.275	.450	3.250	YES	4P + 32S + 4P	1-6600333-4
	.300	1.425	3.900	.250	.250	2.100	4.250	.275	.450	3.950	YES	6P + 24S + 6P	1-6600333-3
	.300	.425	1.900	.250	.250	1.100	2.250	.275	.450	1.950	YES	2P + 24S + 2P	1-6600333-2
	.325	.850	2.800	.300	.300	1.600	3.150	.300	.475	2.850	YES	3ACP + 24S + 3ACP	1-6600333-1
	.300	.475	1.800	.250	.250	1.000	2.150	.275	.450	1.850	YES	2P + 16S + 2P	1-6600333-0
	.300	.225	1.300	-	-	.750	1.650	.275	.450	1.350	YES	1P + 16S + 1P	6600333-9
	.300	.425	3.250	-	.250	2.700	3.600	.275	.450	3.300	YES	2P + 88S + 1P	6600333-8
	.300	.725	2.300	.250	.250	1.250	2.650	.275	.450	2.350	YES	3P + 16S + 3P	6600333-7
	.300	.975	3.000	.250	.250	1.700	3.350	.275	.450	3.050	YES	4P + 24S + 4P	6600333-6
	.300	.475	2.000	.250	.250	1.200	2.350	.275	.450	2.050	YES	2P + 24S + 2P	6600333-5
	.300	.425	1.700	.250	.250	.900	2.050	.275	.450	1.750	YES	2P + 16S + 2P	6600333-4
	.325	1.450	4.000	.300	.300	2.200	4.350	.300	.475	4.050	YES	5ACP + 24S + 5ACP	6600333-1
	DIM "TT"	DIM "W"	DIM "U"	DIM "T"	DIM "S"	DIM "R"	DIM "L"	DIM "K"	DIM "G"	DIM "D"	RETENTION CLIP	DESCRIPTION	PART NO

OBSOLETE

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
J. McCLINTON
CHK
D. TROUT
APVD
R. WHYNE

23MAR2005
23MAR2005
23MAR2005

DIMENSIONS:
INCH

0 PLC ±"
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±2°
FINISH

TOLERANCES UNLESS OTHERWISE SPECIFIED:

108-1973
APPLICATION SPEC
114-13038

MATERIAL

Customer Drawing

SIZE
A1

CAGE CODE
00779

DRAWING NO
6600333

RESTRICTED TO

-

TE Connectivity


VERTICAL HEADER ASSEMBLY, W/GUIDES, PRESS FIT, TYPE PSP MULTI-BEAM XL

SCALE
3:1


SHEET
2

OF
22

REV
P7

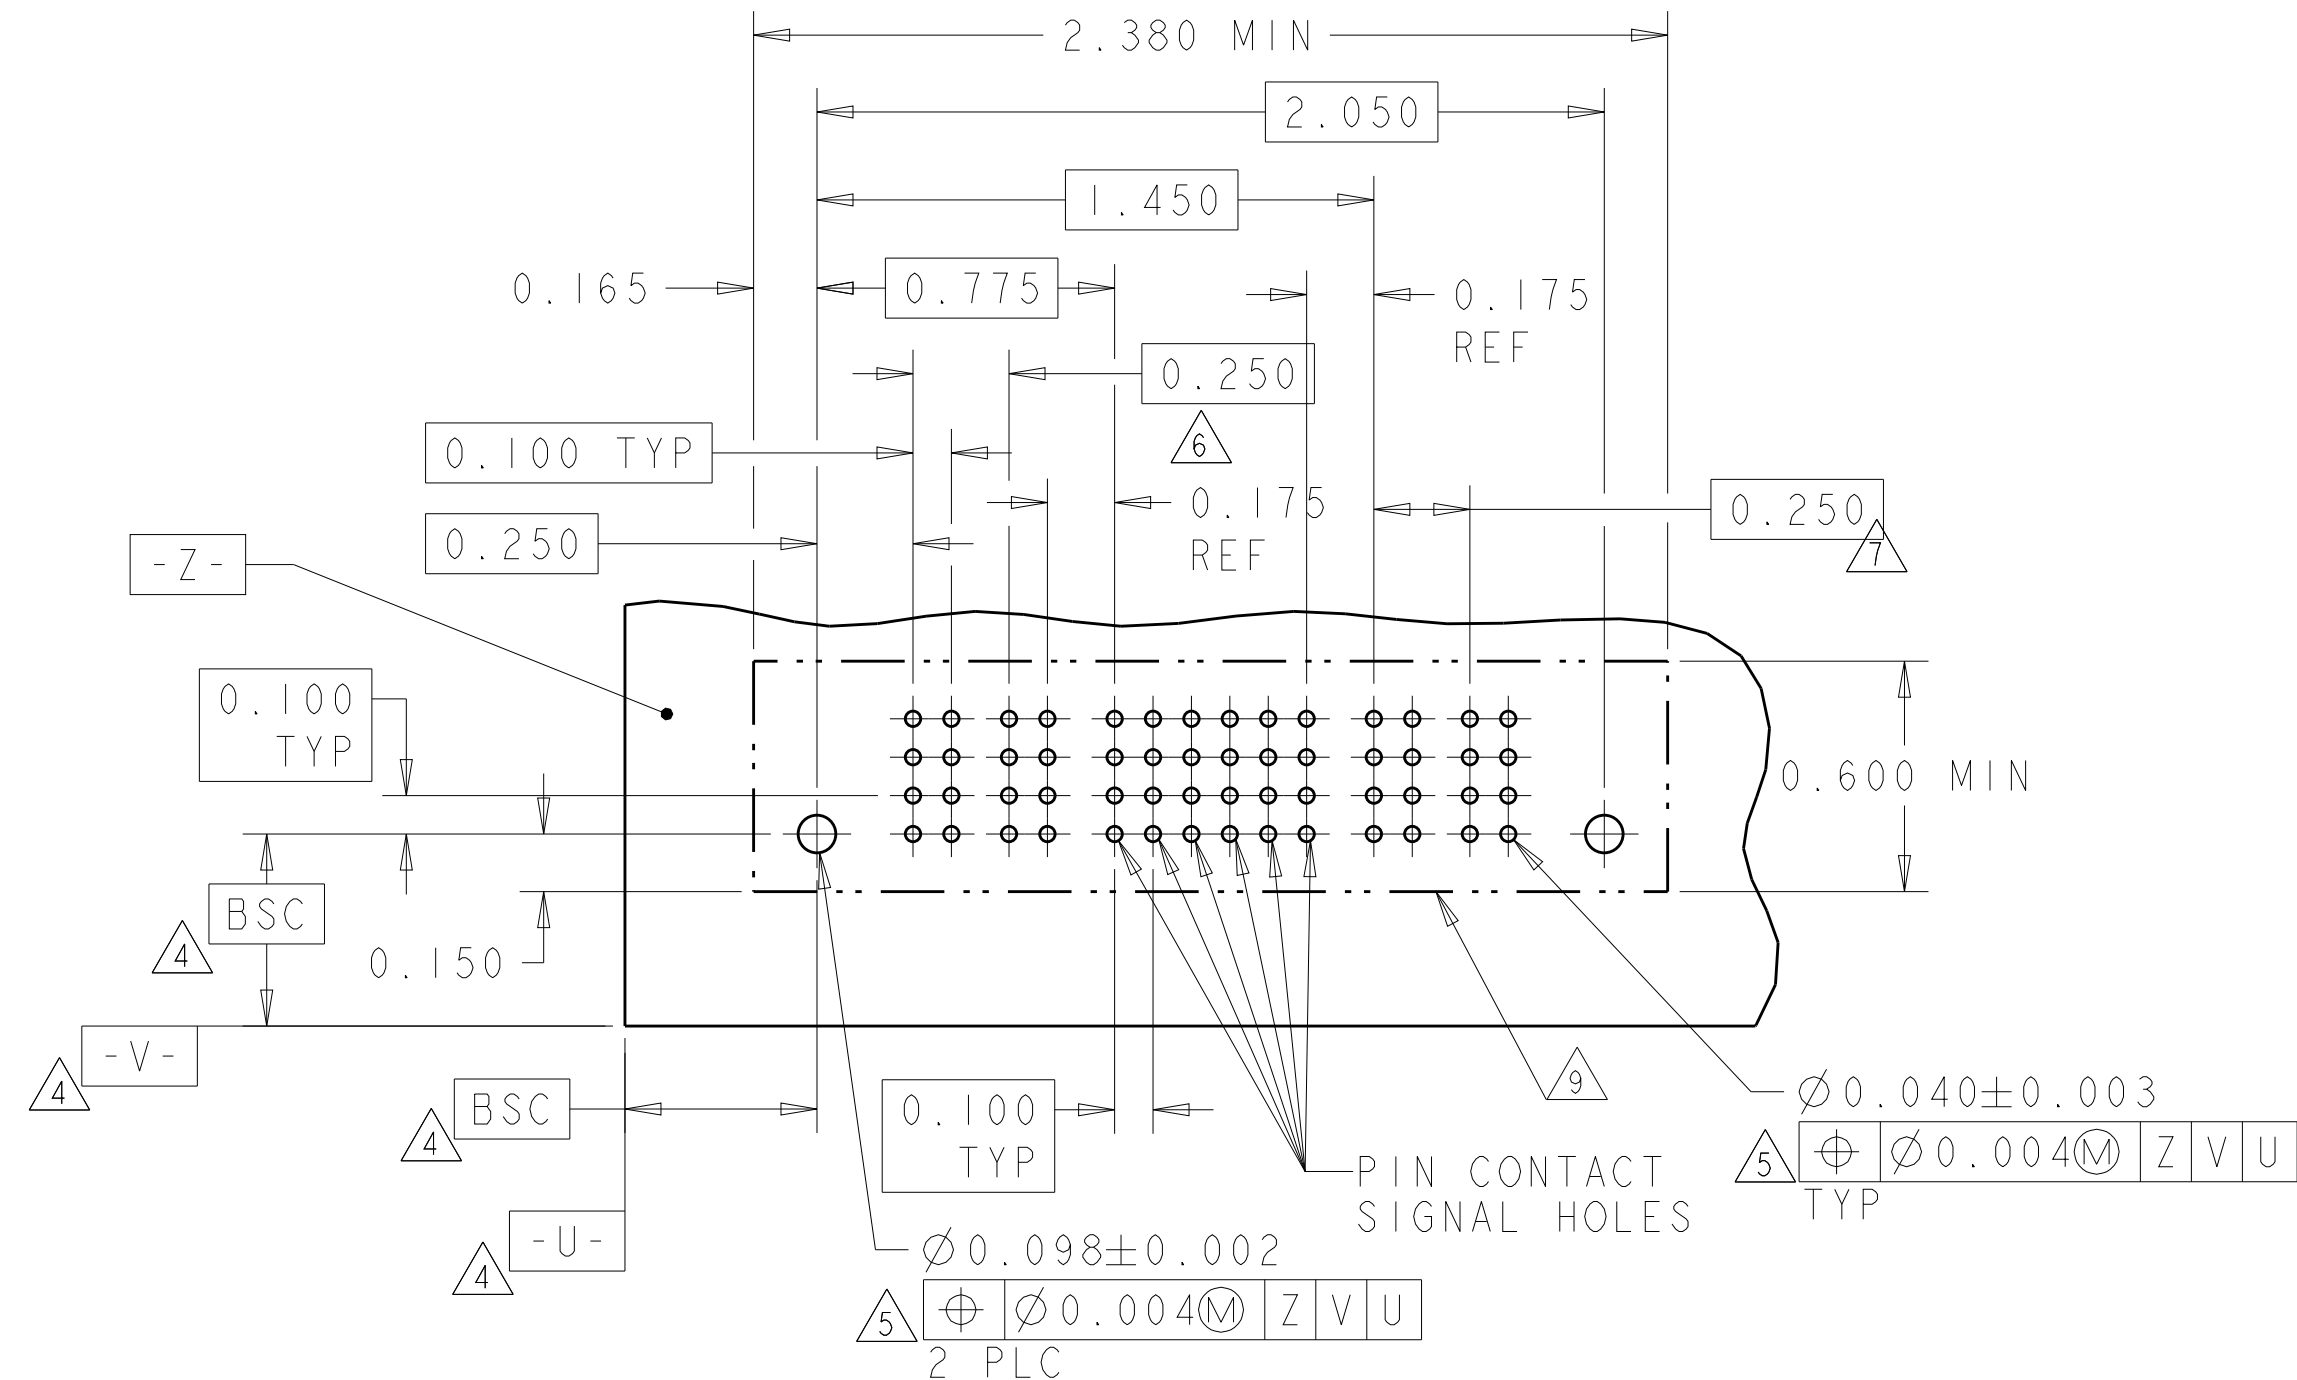[illegible]

RECOMMENDED PCB LAYOUT 6600333-5
SCALE 2:1

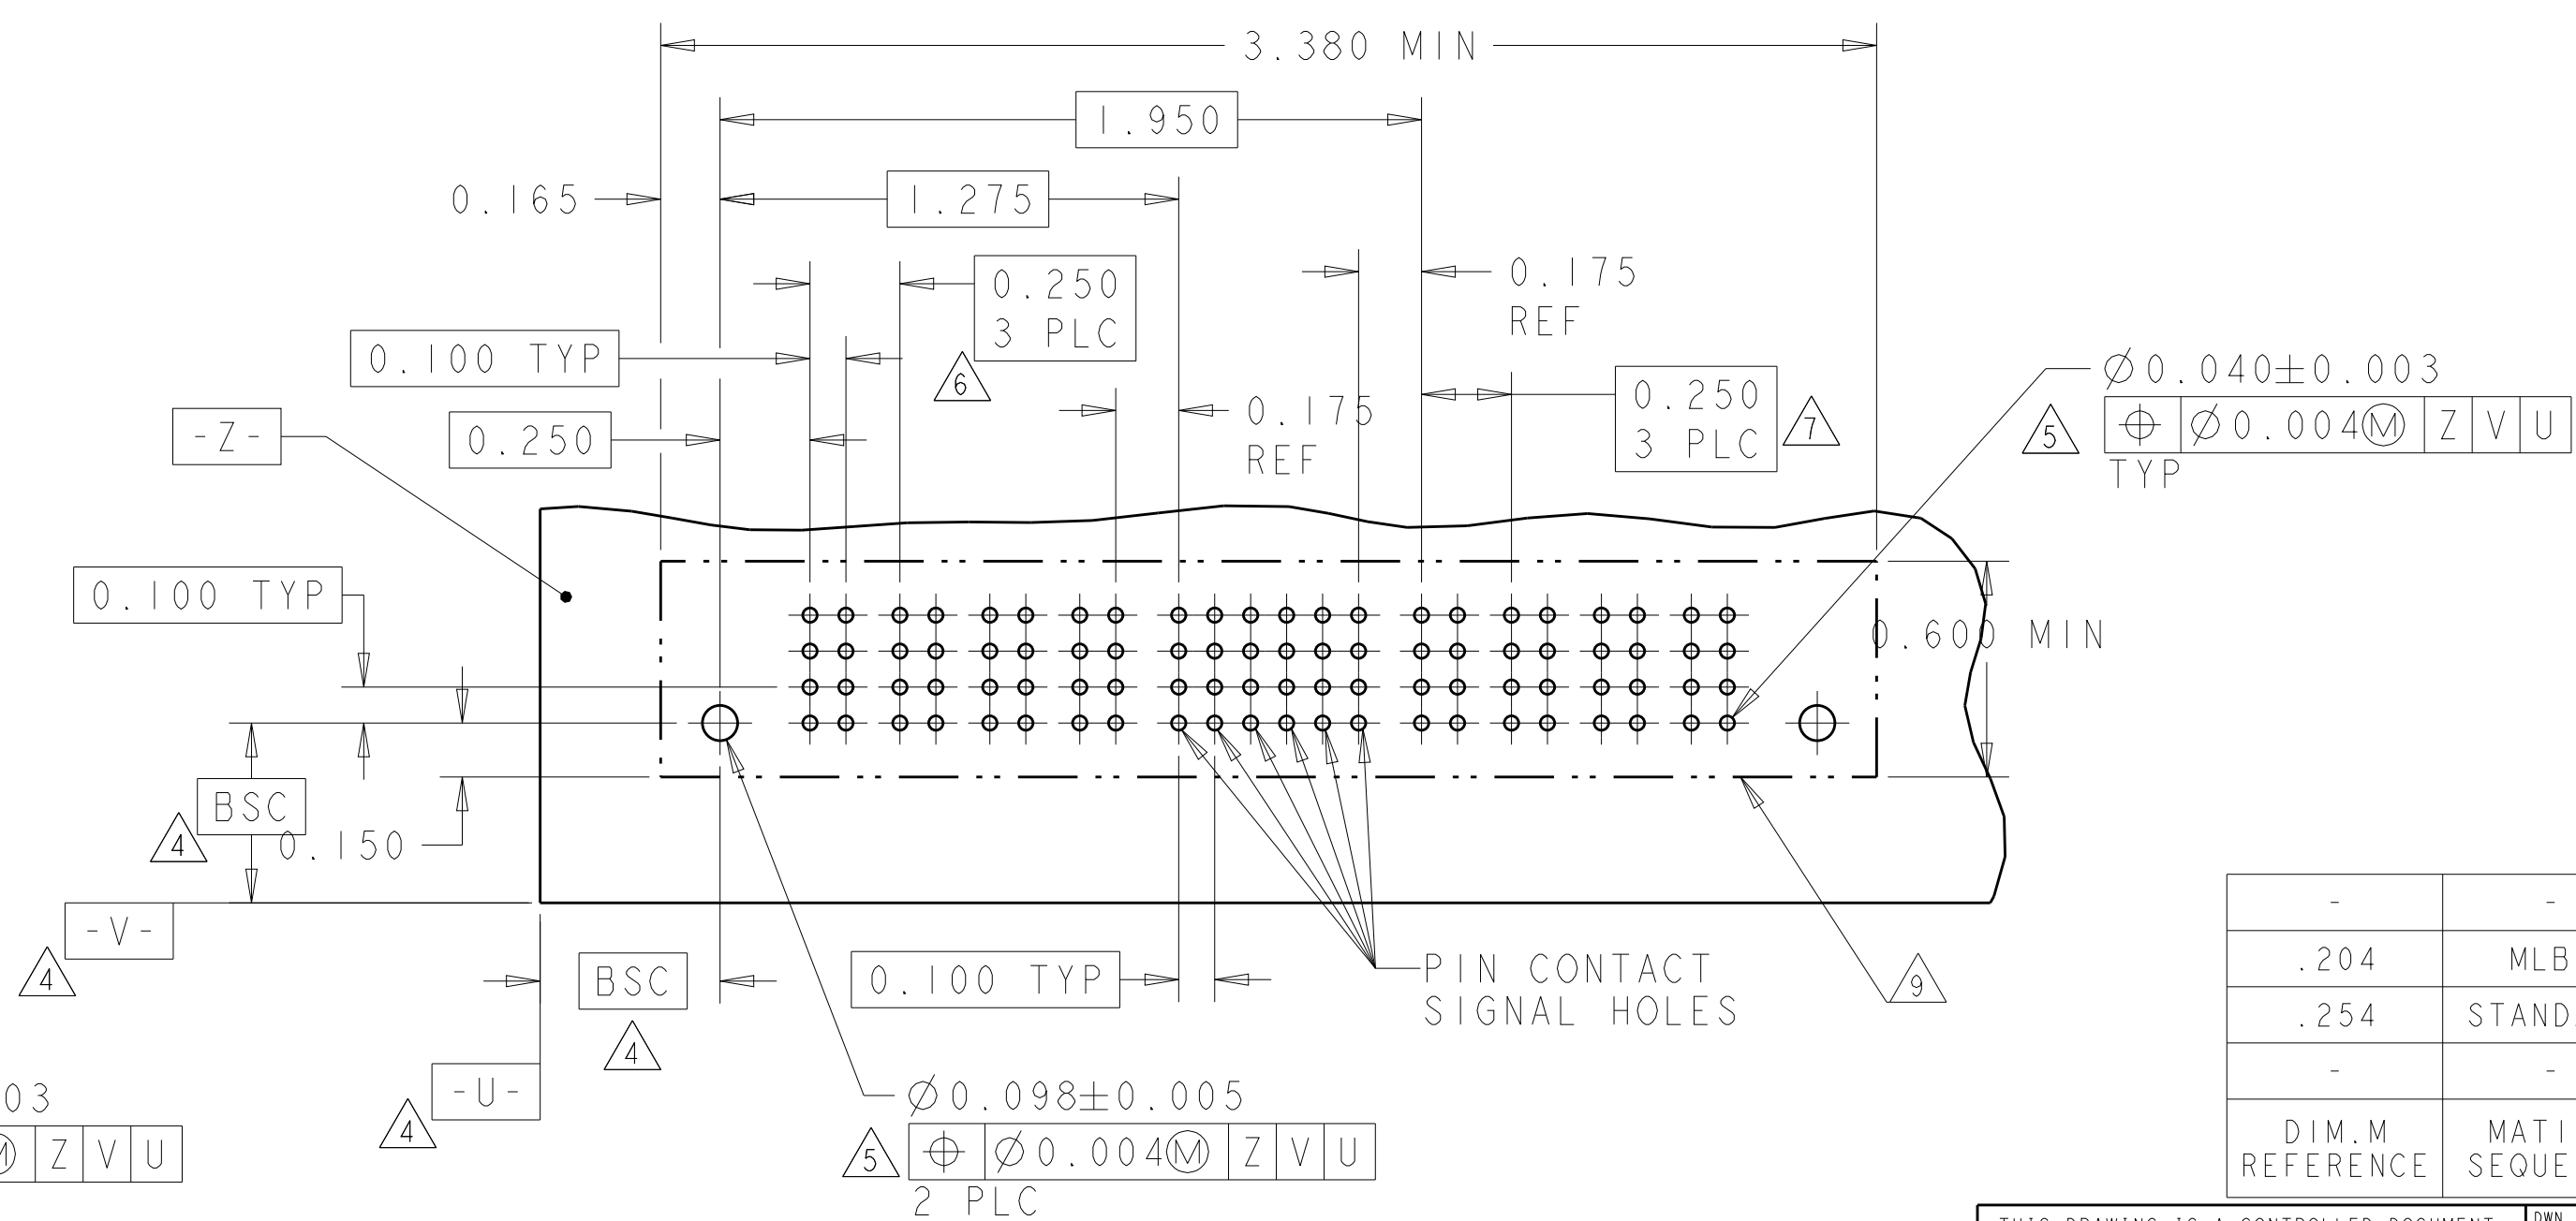
[illegible]

RECOMMENDED PCB LAYOUT 6600333-6
SCALE 2:1

-	-	RETENTION CLIP	HD
.204	MLBF	SIGNAL CONTACT .165 TAIL LENGTH	ES
.254	STANDARD	SIGNAL CONTACT .165 TAIL LENGTH	EV
-	-	POWER CONTACT .165 TAIL LENGTH	VM
DIM.M REFERENCE	MATING SEQUENCE	DESCRIPTION	IDENTIFIER


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 23MAR2005 J McCLINTON CHK 23MAR2005 D TROUT APVD 23MAR2005 R WHYNE		 TE Connectivity	
DIMENSIONS: INCH		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES 2°		NAME VERTICAL HEADER ASSEMBLY, W/GUIDES, PRESS FIT, TYPE PSP MULTI-BEAM XL	
		PRODUCT SPEC 108-1973 APPLICATION SPEC 114-13038		SIZE A1	
MATERIAL -		FINISH -		CAGE CODE 6600333	
		WEIGHT -		DRAWING NO 3:1	
		Customer Drawing		SCALE 3:1	
				SHEET 3 OF 22	
				REV P7	

PART NUMBER	ROWS		POWER	SIGNAL				POWER	
			P1	1	2	3	4	P2	
6600333-9	D		VM	ES	EV	ES	EV	VM	
	C			EV	EV	EV	EV		
	B			ES	EV	ES	EV		
	A			ES	EV	ES	EV		
IP+16S+IP		HD							HD

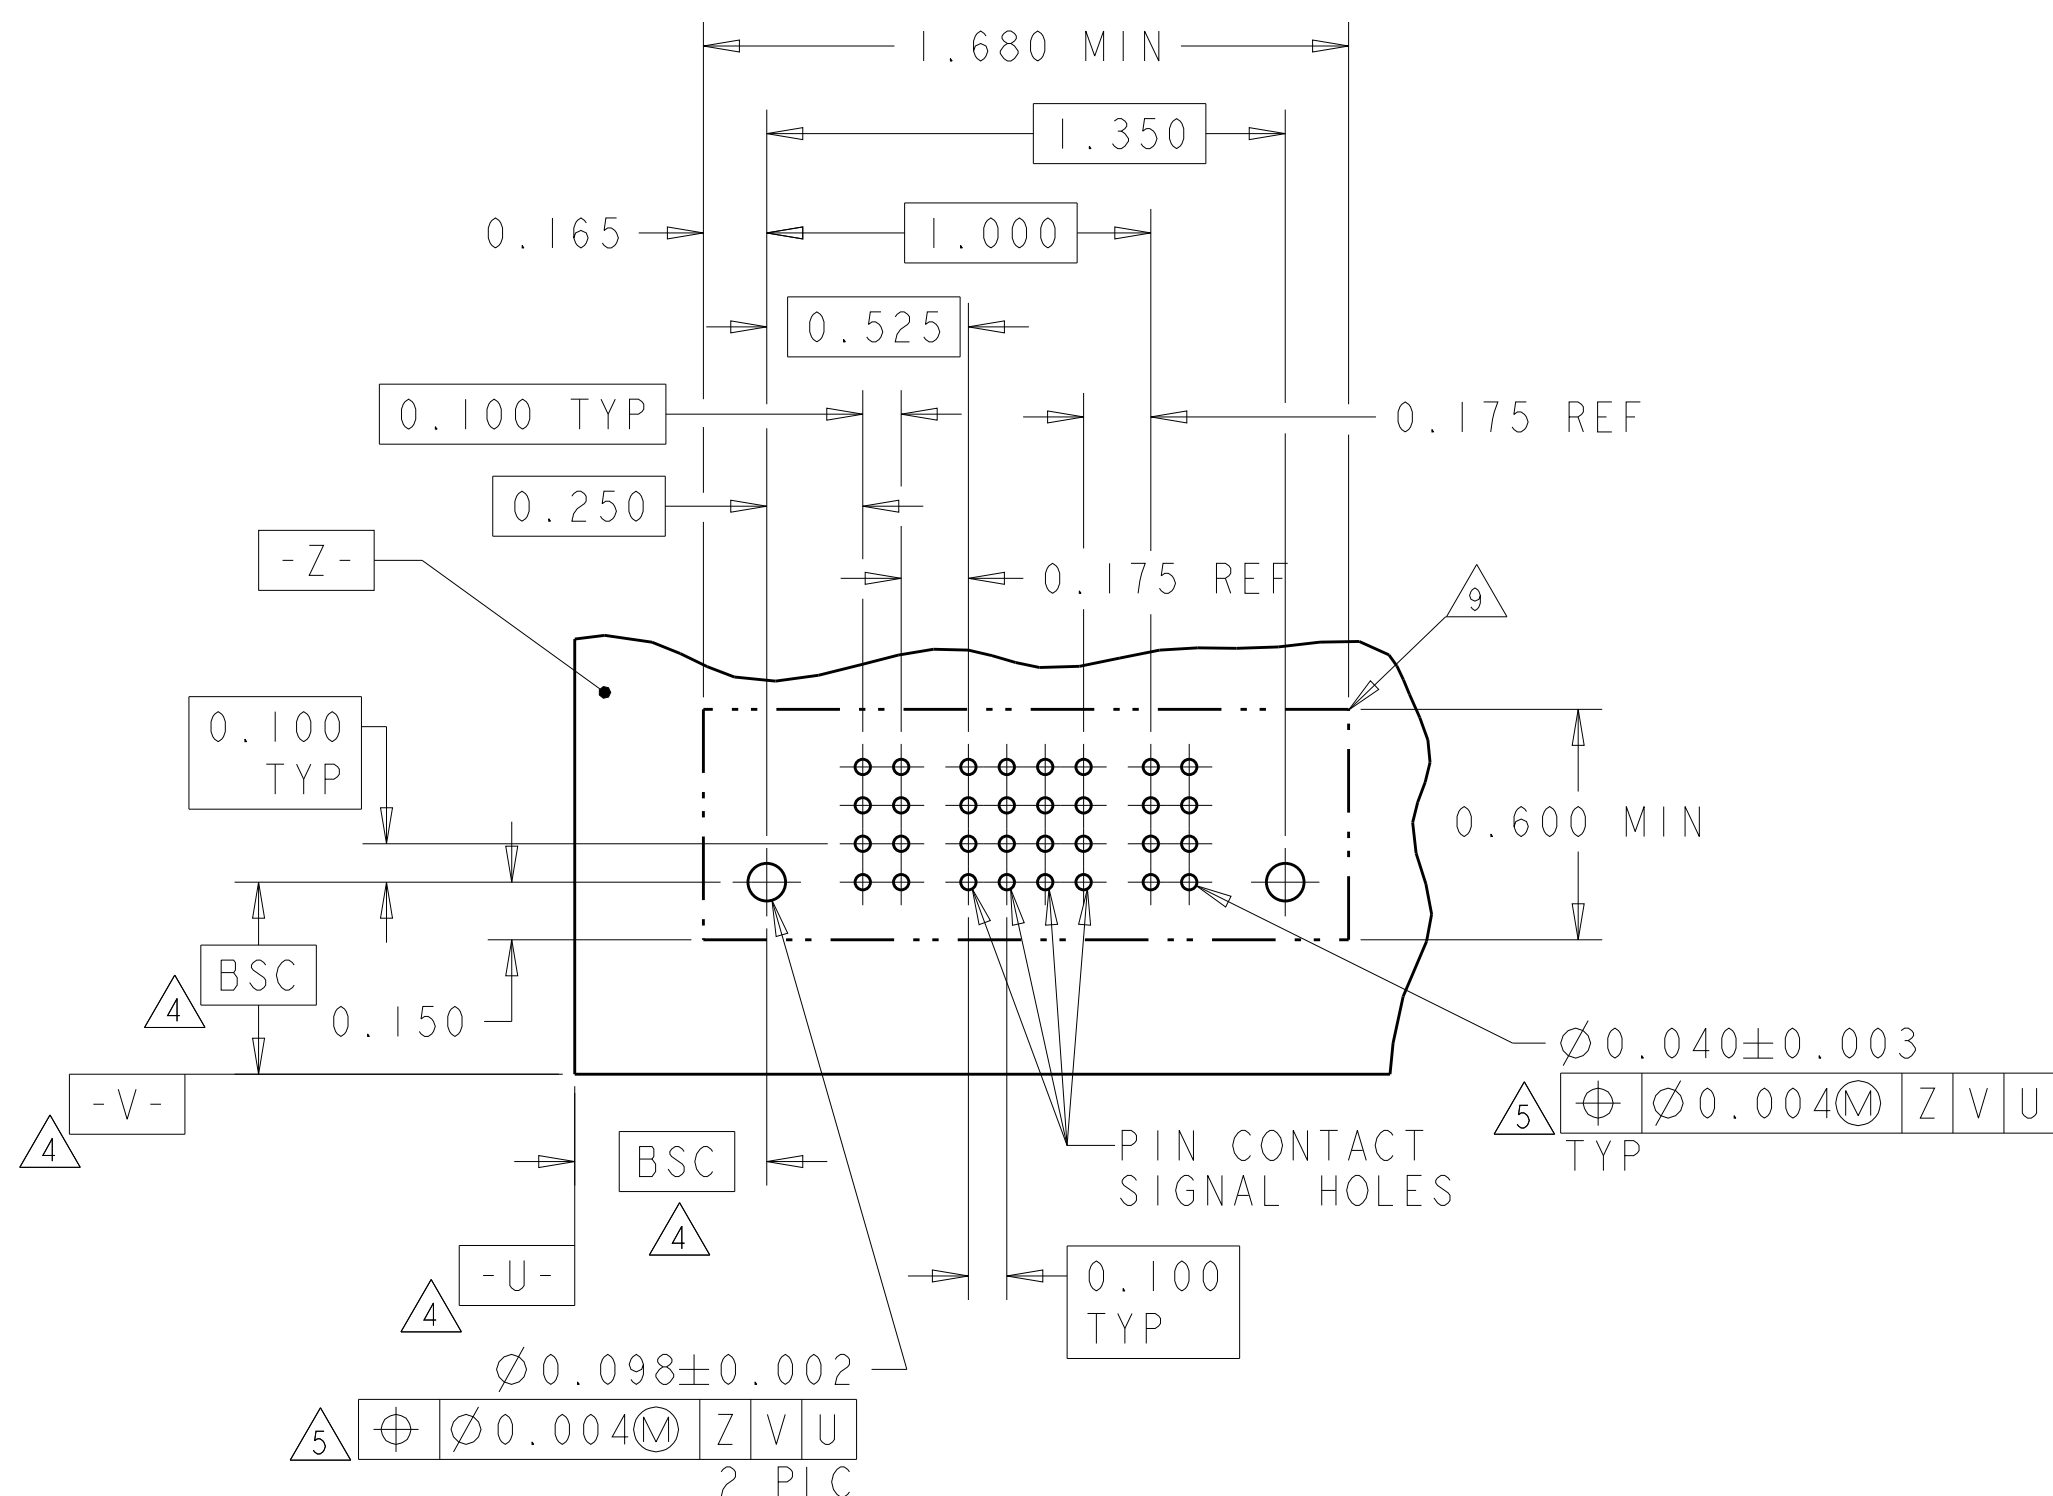

RECOMMENDED PCB LAYOUT 6600333-9
SCALE 2:1

PART NUMBER	ROWS		POWER	SIGNAL				POWER	
			P1	1	2	3	4	P2	
3-6600333-0	D		VM	ES	EV	EV	ES	VM	
	C			EV	EV	EV	EV		
	B			EV	EV	EV	EV		
	A			EV	EV	EV	EV		
IP+16S+IP		HD							HD




THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 23MAR2005 J. McCLINTON CHK 23MAR2005 D. TROUT APVD 23MAR2005 R. WHYNE		 TE Connectivity	
DIMENSIONS: INCH		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES 2°		NAME VERTICAL HEADER ASSEMBLY, W/GUIDES, PRESS FIT, TYPE PSP MULTI-BEAM XL	
		PRODUCT SPEC 108-1973 APPLICATION SPEC 114-13038		SIZE A1	
MATERIAL -		FINISH -		CAGE CODE 6600333	
		WEIGHT -		DRAWING NO 22	
		Customer Drawing		SCALE 3:1 SHEET 4 OF 22 REV P7	

[illegible][illegible]




RECOMMENDED PCB LAYOUT 1-6600333-6
SCALE 2:1

PART NUMBER	ROWS		POWER						SIGNAL						POWER								
			P1	P2	P3	P4	P5	P6	1	2	3	4	5	6	P7	P8	P9	P10	P11	P12	P13	P14	
2-6600333-1	D C B A							EV	EV	EV	EV	EV	EV										
								EV	EV	EV	EV	EV	EV										
								EV	EV	EV	EV	EV	EV										
								ES	ES	EV	EV	EV	EV										
6ACP + 24S + 8P																							

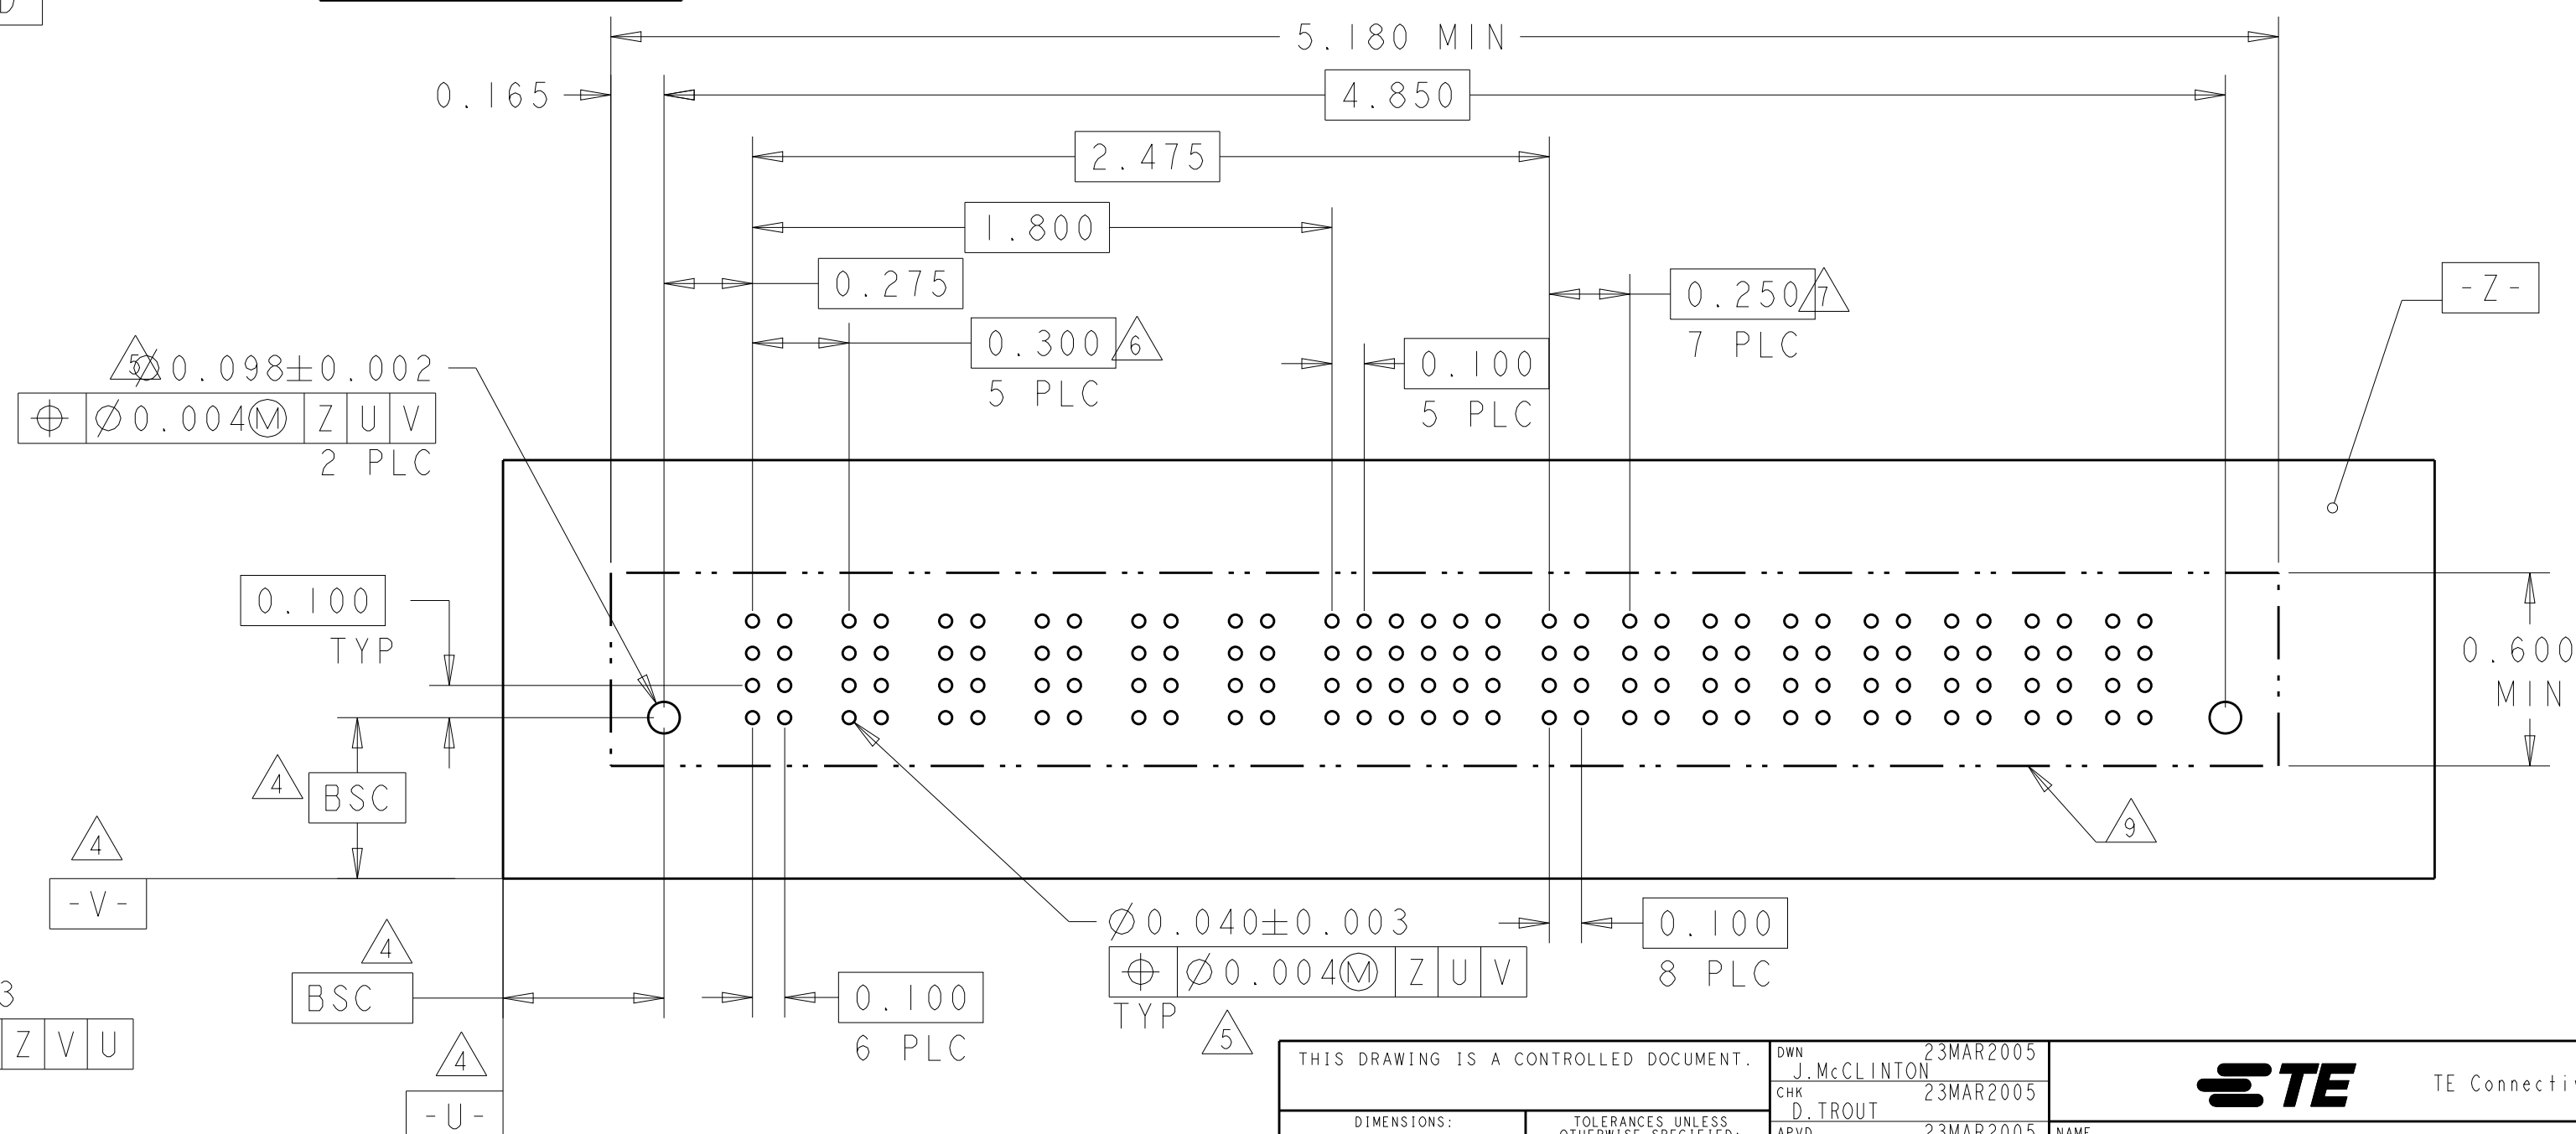

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. McCLINTON 23MAR2005 CHG D. TROUT 23MAR2005		 TE Connectivity	
DIMENSIONS: INCH		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±. 1 PLC ±. 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±°		NAME VERTICAL HEADER ASSEMBLY, W/GUIDES, PRESS FIT, TYPE PSP MULTI-BEAM XL	
		PRODUCT SPEC 108-1973 APPLICATION SPEC 114-13038		SIZE CASE CODE DRAWING NO A100779C6600333	
MATERIAL -		FINISH -		RESTRICTED TO -	
		Customer Drawing		SCALE 3:1 SHEET 6 of 22 REV P	

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
ES	00	-	-	SEE SHEET 1	-	-

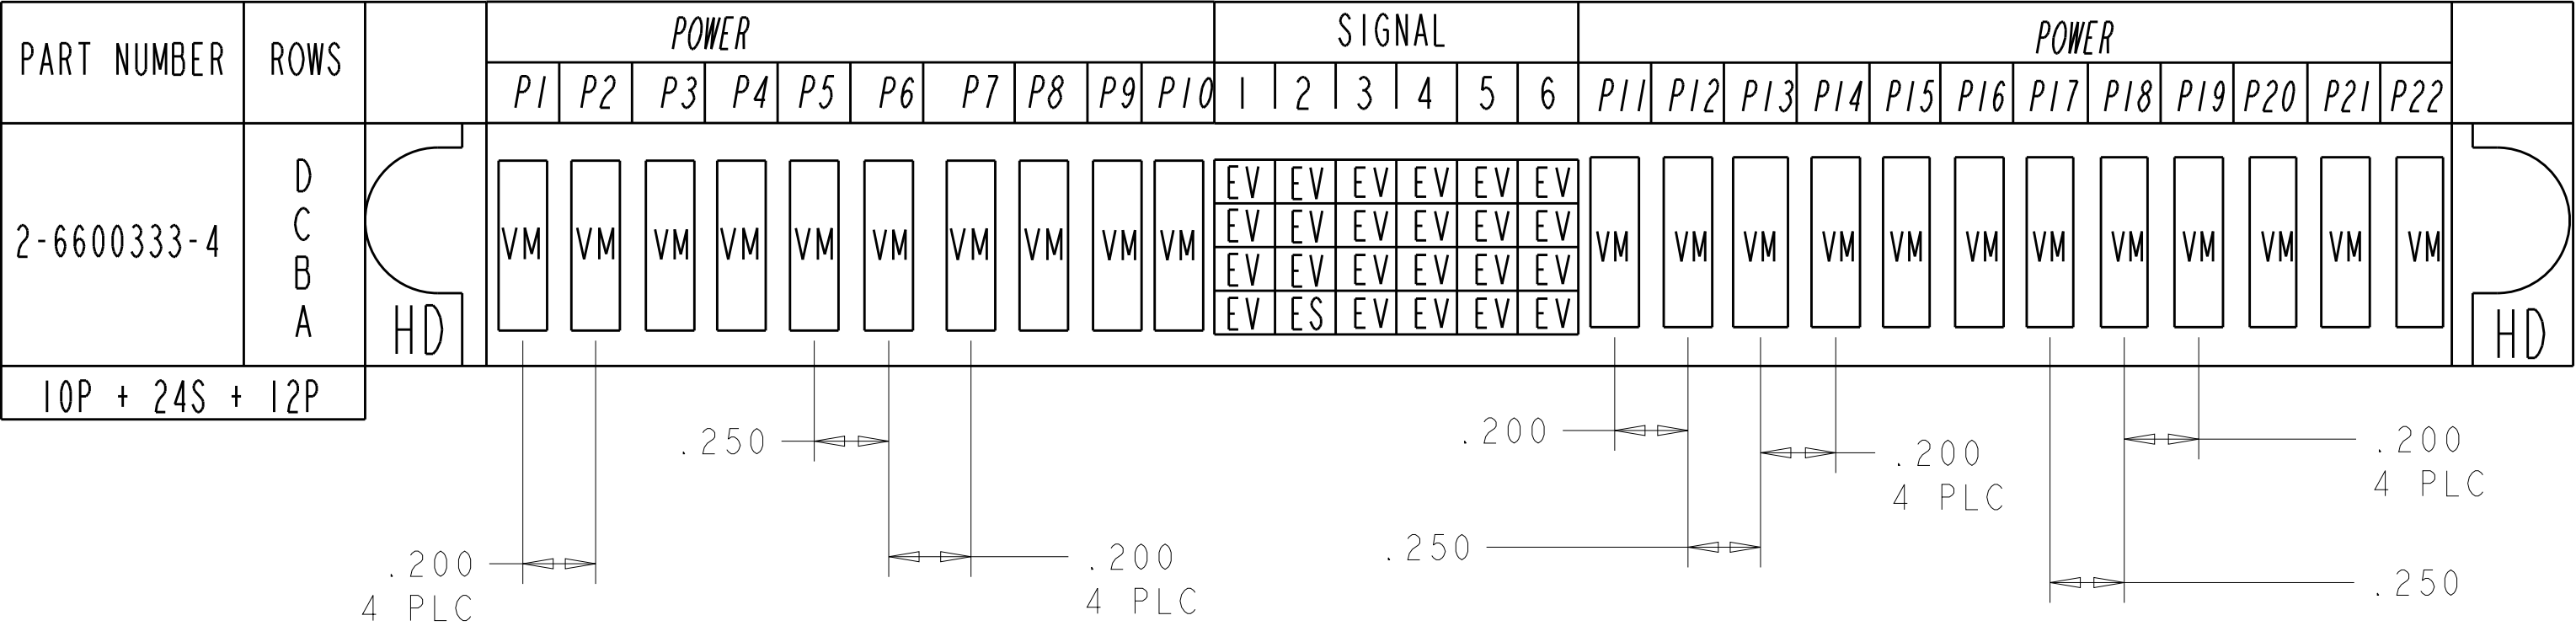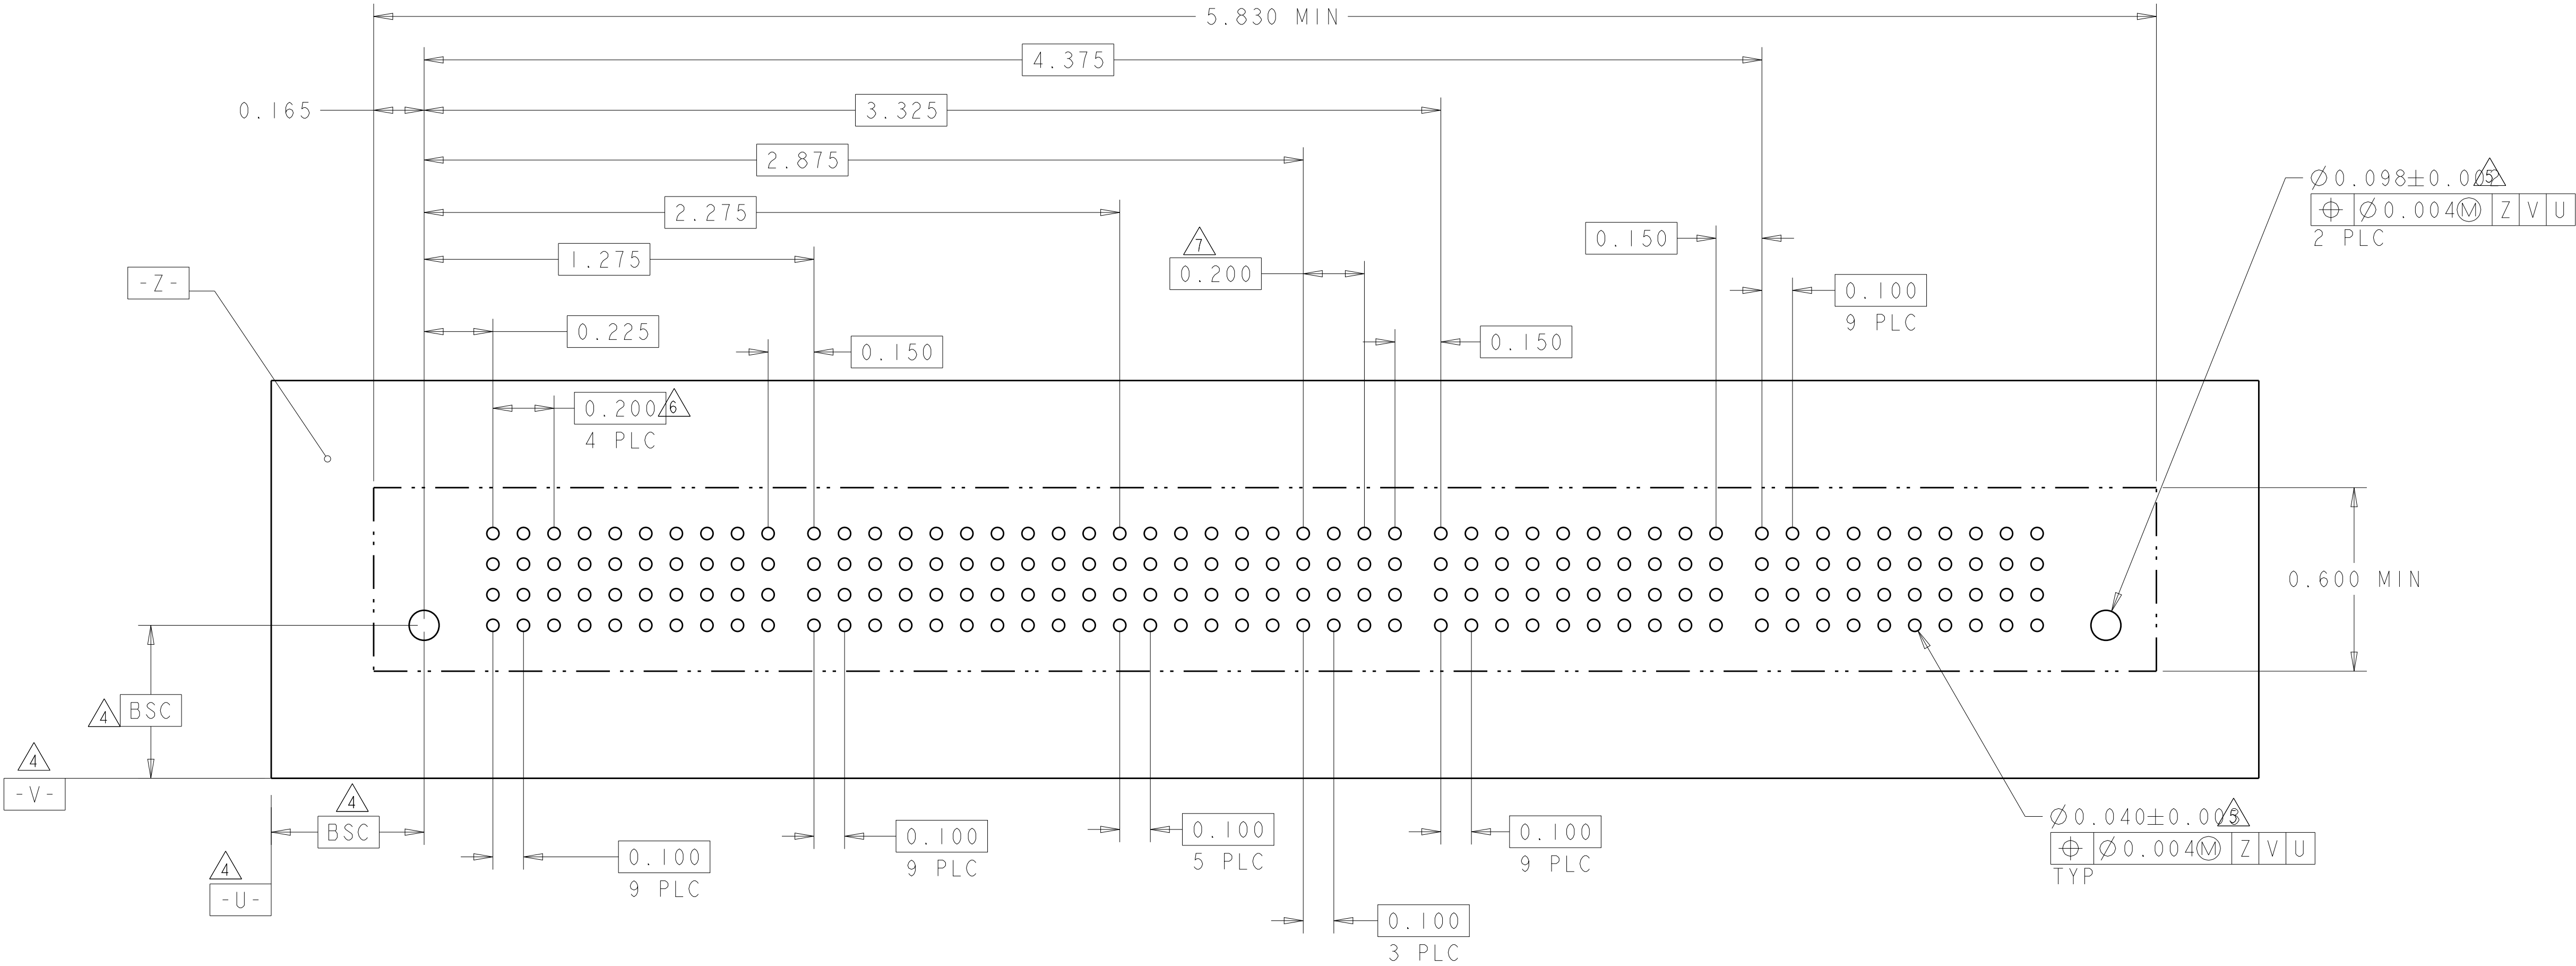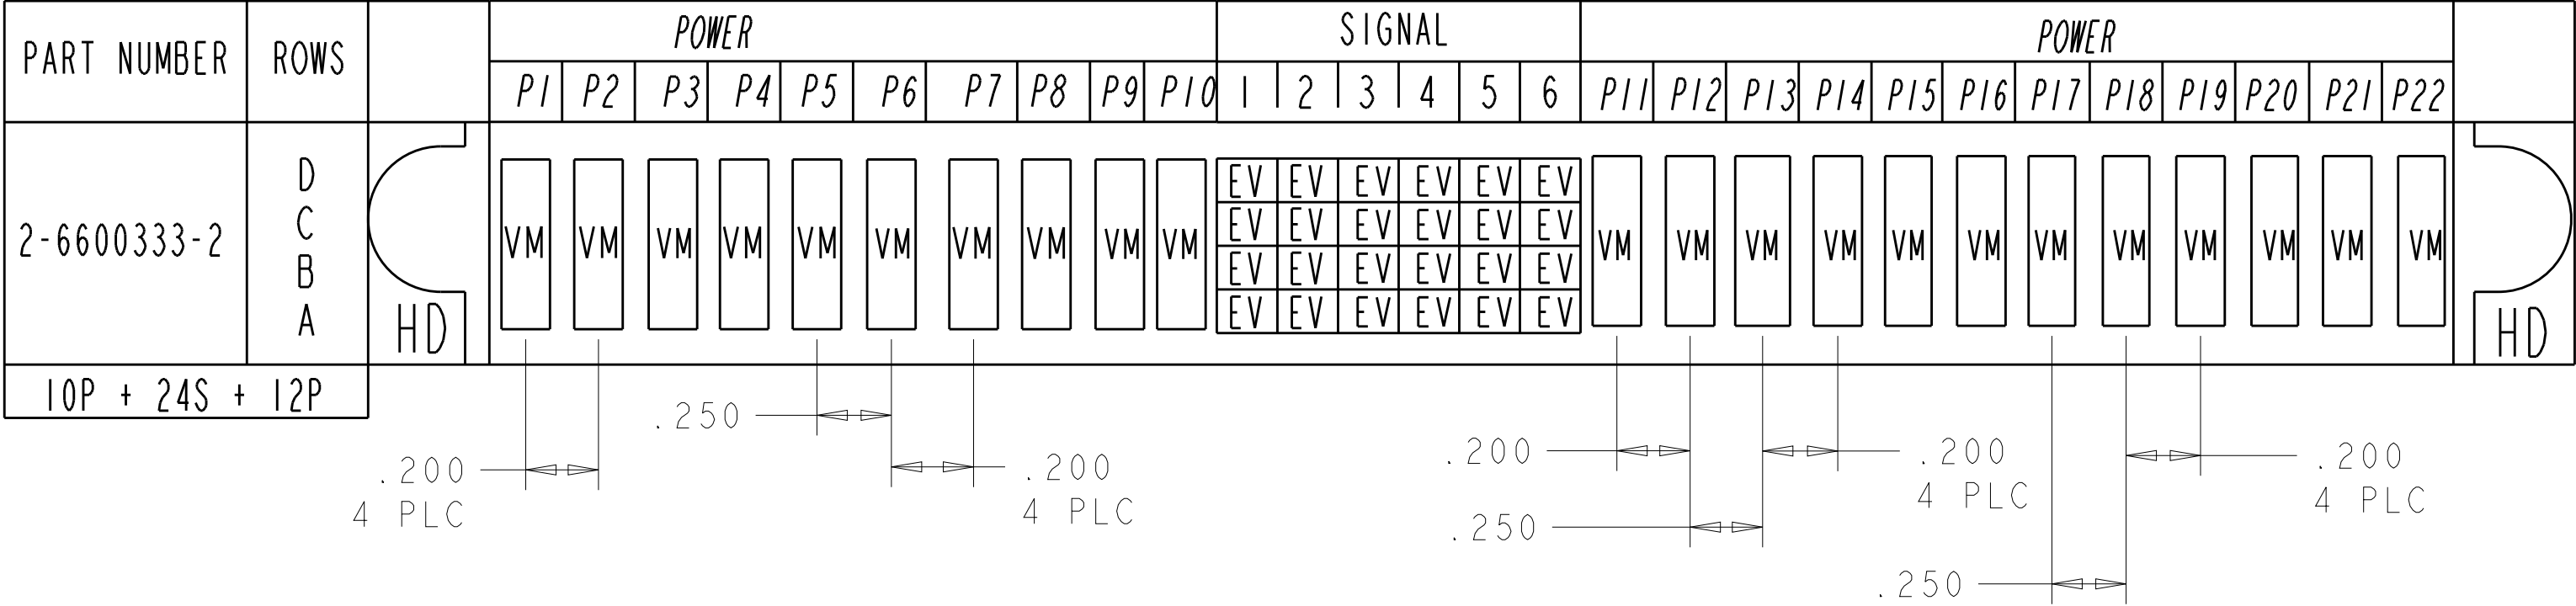

THE PART NUMBER 2-6600333-4 PCB LAYOUT IS SAME AS 2-6600333-2

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

INCH

MATERIAL

-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±"

1 PLC ±.01

2 PLC ±.01

3 PLC ±.005

4 PLC ±.0020

ANGLES ±2°

FINISH

FINISH

-

Customer Drawing

DWN J. McCLINTON 23MAR2005

CHK D. TROUT 23MAR2005

APVD R. WHYNE 23MAR2005

PRODUCT SPEC

108-1973

APPLICATION SPEC

114-13038

WEIGHT

-

NAME VERTICAL HEADER ASSEMBLY, W/GUIDES, PRESS FIT, TYPE PSP MULTI-BEAM XL

SIZE A1

CAGE CODE 00779

DRAWING NO C=6600333

RESTRICTED TO

-

TE Connectivity

SCALE 3:1


SHEET 7 OF 22

REV P7


4805 (3/11)

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-


PART NUMBER	ROWS		POWER				SIGNAL				POWER			
			P1	P2	P3	P4	1	2	3	4	P5	P6	P7	
2-6600333-5	D		VM	VM	VM	VM	EV	EV	EV	EV	VM	VM	VM	
	C						EV	EV	EV	EV				
	B						EV	EV	EV	EV				
	A						ES	EV	EV	EV				
4P+16S+3P		HD												HD

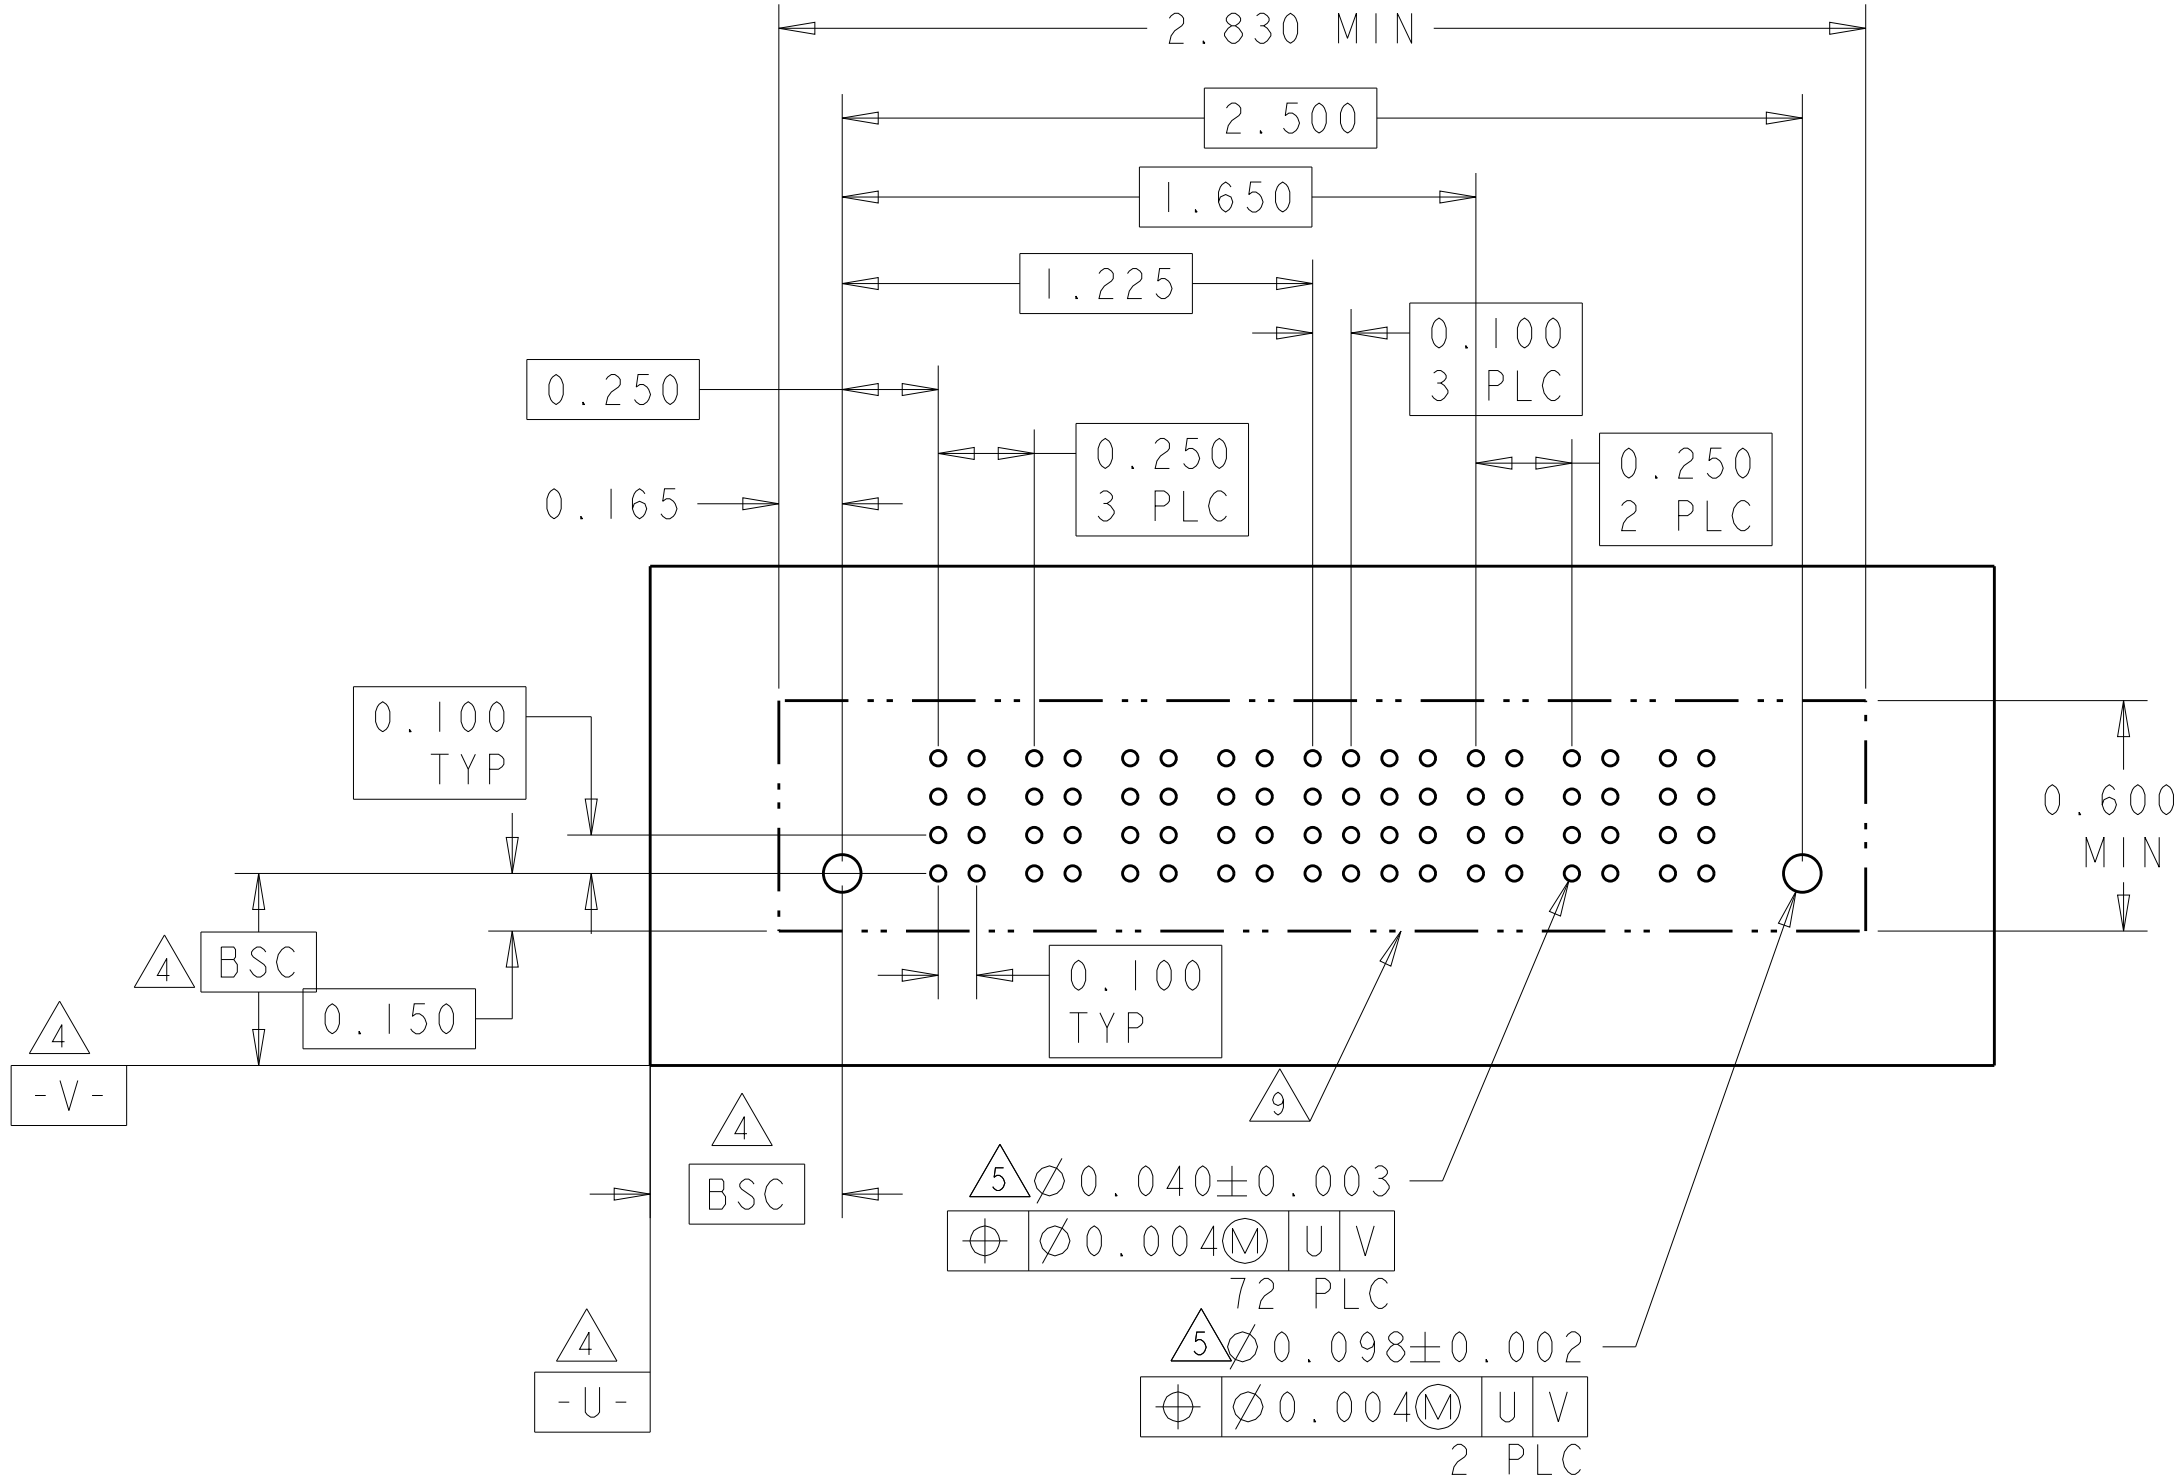

PART NUMBER	ROWS		POWER			SIGNAL						POWER			
			P1	P2	P3	1	2	3	4	5	6	P4	P5	P6	
2-6600333-6	D		VM	VM	VM	EV	EV	EV	EV	EV	EV	VM	VM	VM	
	C					EV	EV	EV	EV	EV	EV				
	B					EV	EV	EV	EV	EV	EV				
	A					ES	EV	EV	EV	EV	EV				
3P+24S+3P		HD													HD

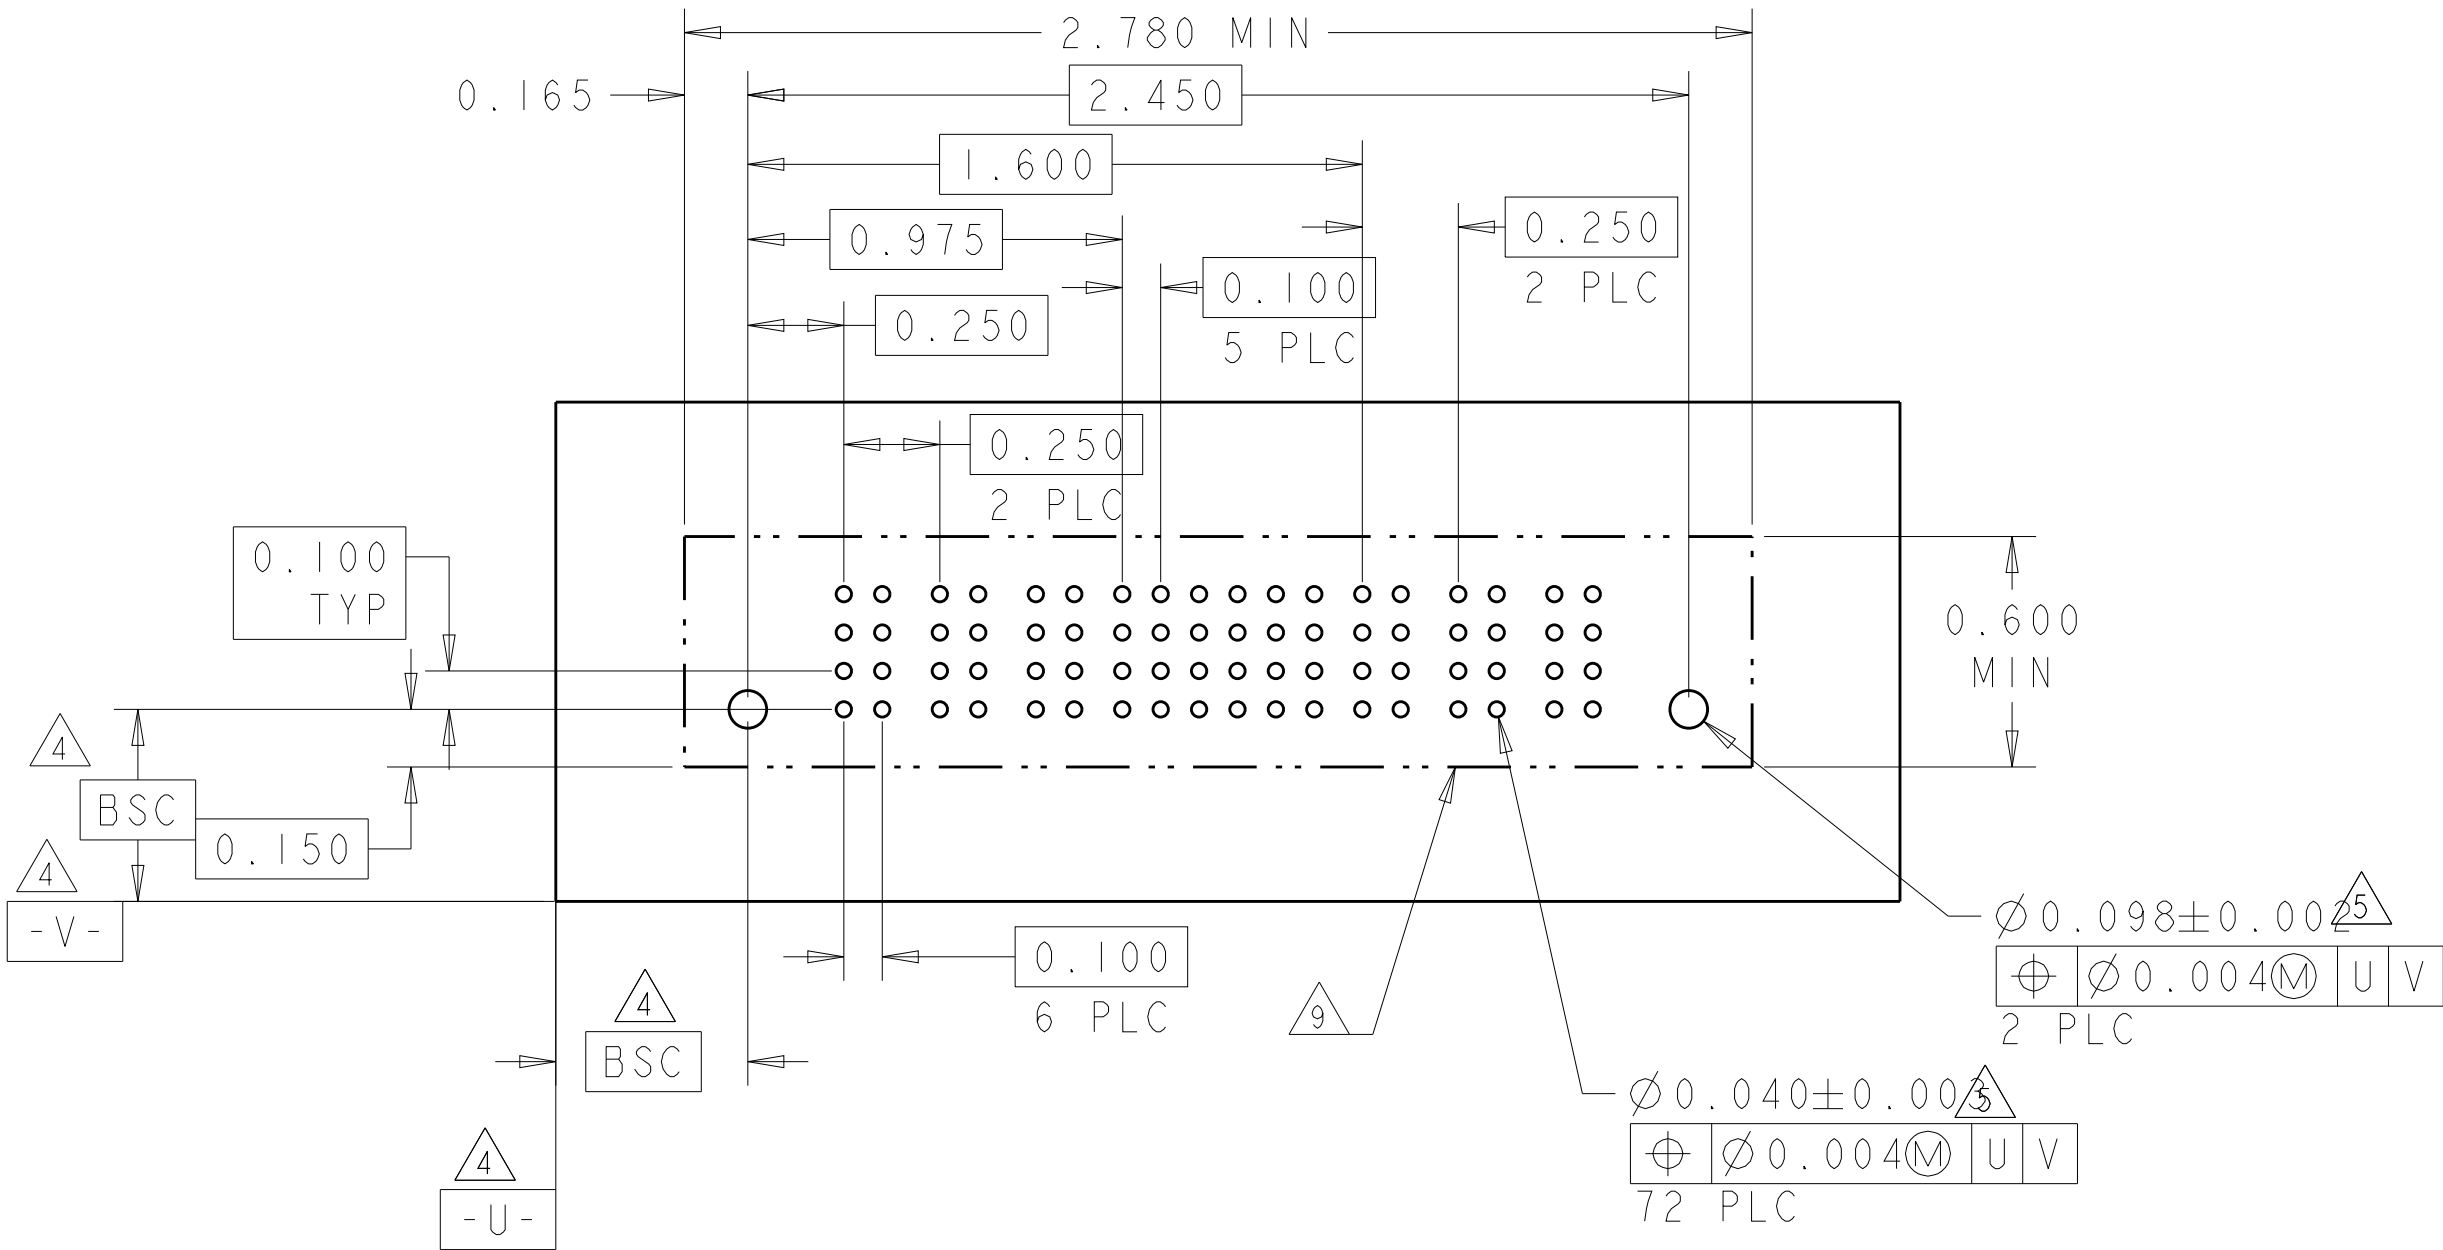

PART NUMBER	ROWS		POWER				SIGNAL						POWER					
			P1	P2	P3	P4	1	2	3	4	5	6	P5	P6	P7	P8	P9	
2-6600333-7	D		VM	VM	VM	VM	ES	EV	ES	EV	EV		VM	VM	VM	VM	VM	
	C						EV	EV	EV	ES	EV							
	B						EV	ES	EV	EV	EV							
	A						ES	ES	EV	EV	ES							
4P+24S+5P		HD																HD

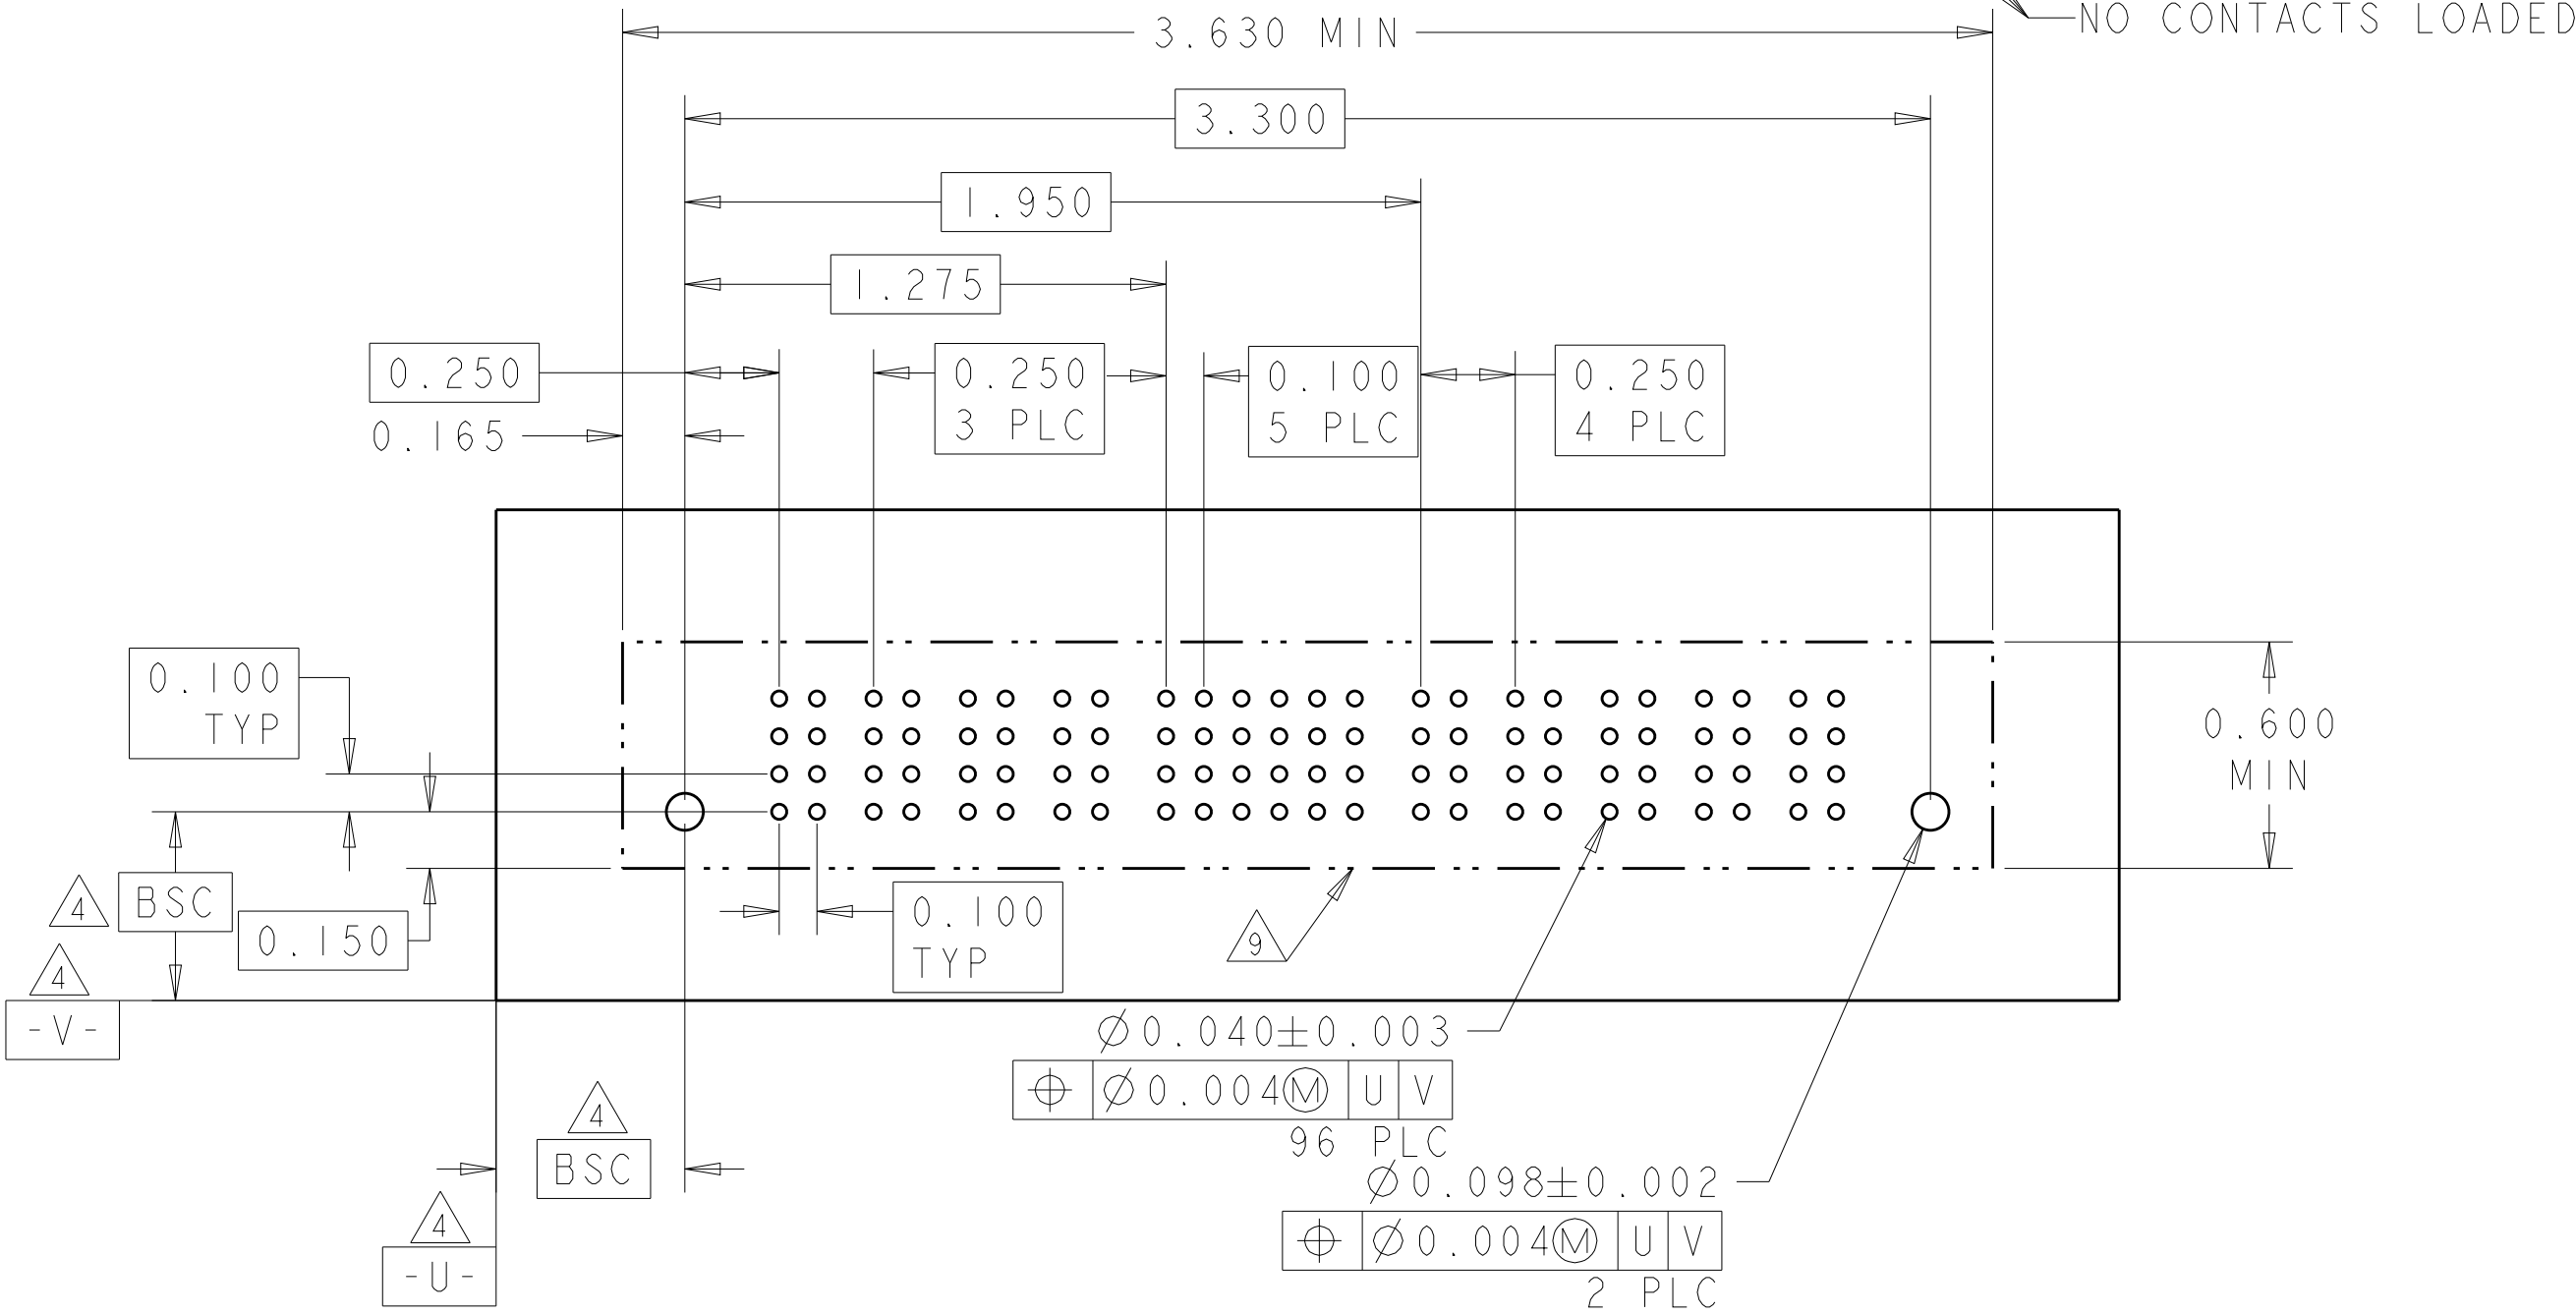

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN J. McCLINTON 23MAR2005
CHK D. TROUT 23MAR2005
APVD R. WHYNE 23MAR2005

DIMENSIONS:
INCH

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±.
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±2°
FINISH

0 PLC ±.
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±2°
FINISH

MATERIAL

Customer Drawing

NAME
VERTICAL HEADER ASSEMBLY, W/GUIDES, PRESS FIT, TYPE PSP MULTI-BEAM XL

SIZE
A1

CAGE CODE
100779

DRAWING NO
C=6600333


RESTRICTED TO

SCALE
3:1


SHEET
9

OF
22

REV
P7

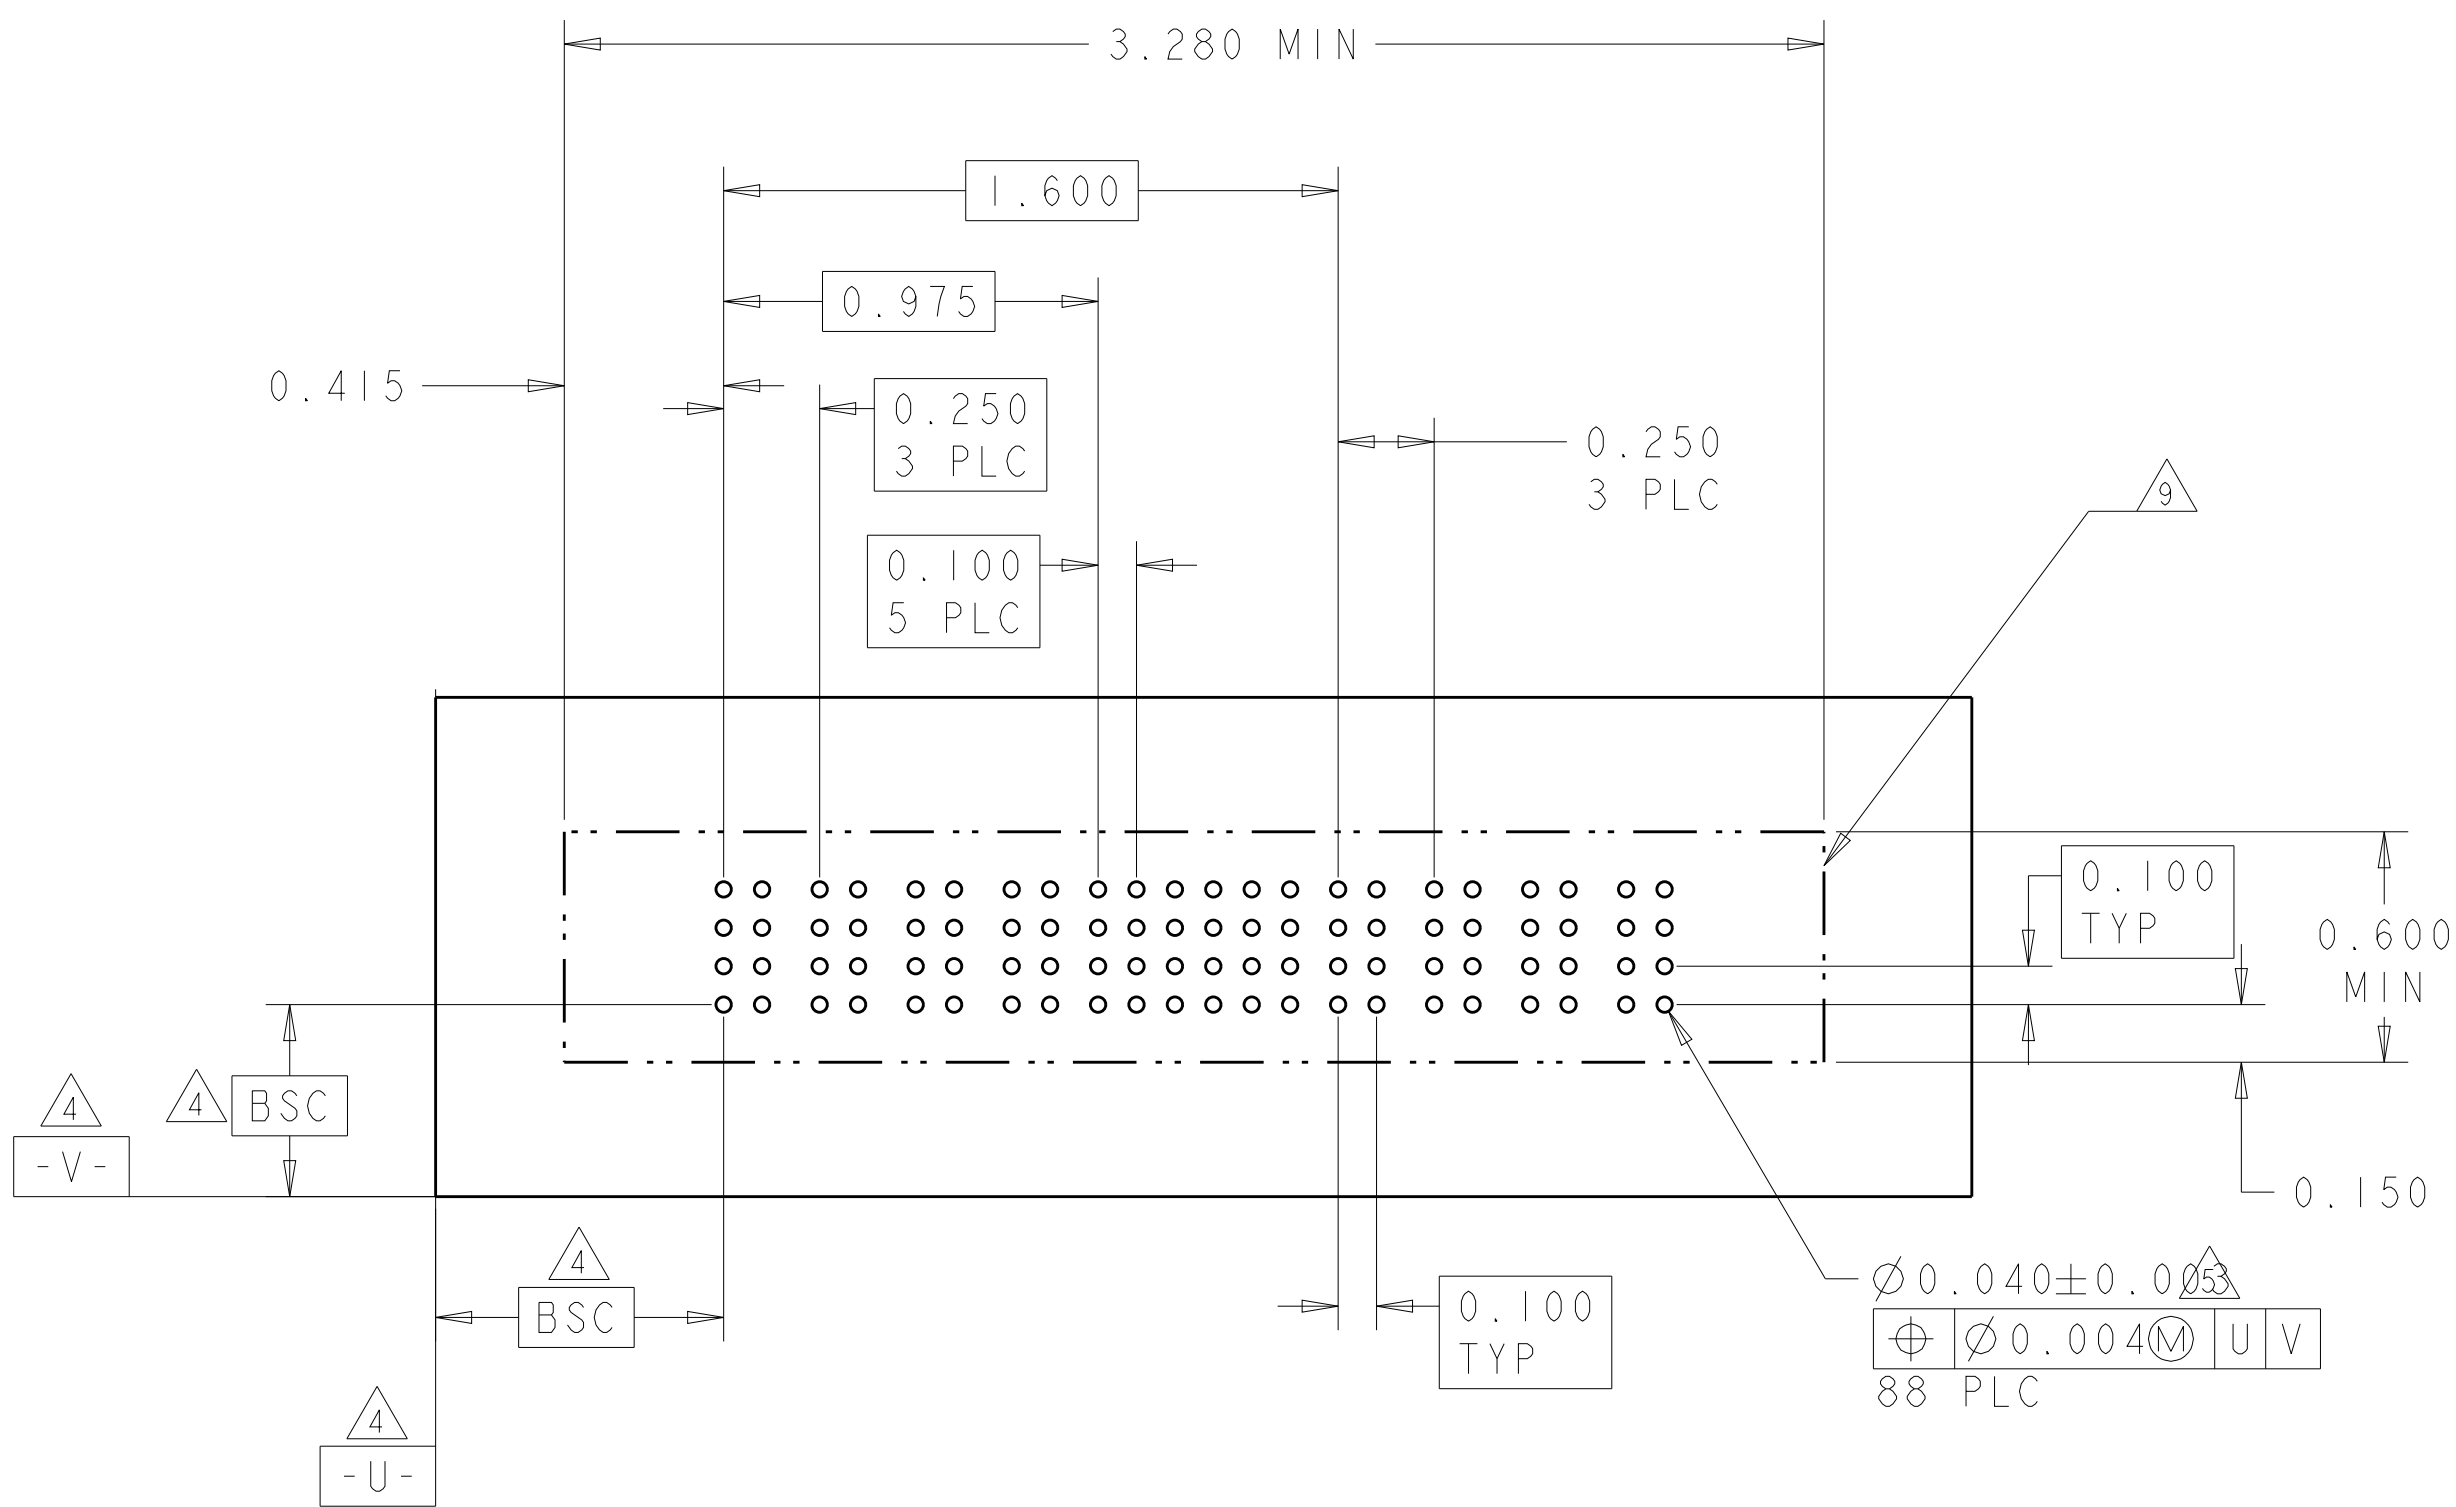[illegible]4805 (3/11)



PART NUMBER	ROWS		POWER				SIGNAL				POWER				
			P1	P2	P3	P4	1	2	3	4	P5	P6	P7	P8	
3-6600333-3	D						E _V	E _V	E _V	E _V					
	E _V						E _V	E _V	E _V						
	E _V						E _V	E _V	E _V						
	E _V						E _V	E _V	E _V						
	E _V						E _V	E _V	E _V						
4P + 16S + 4P															

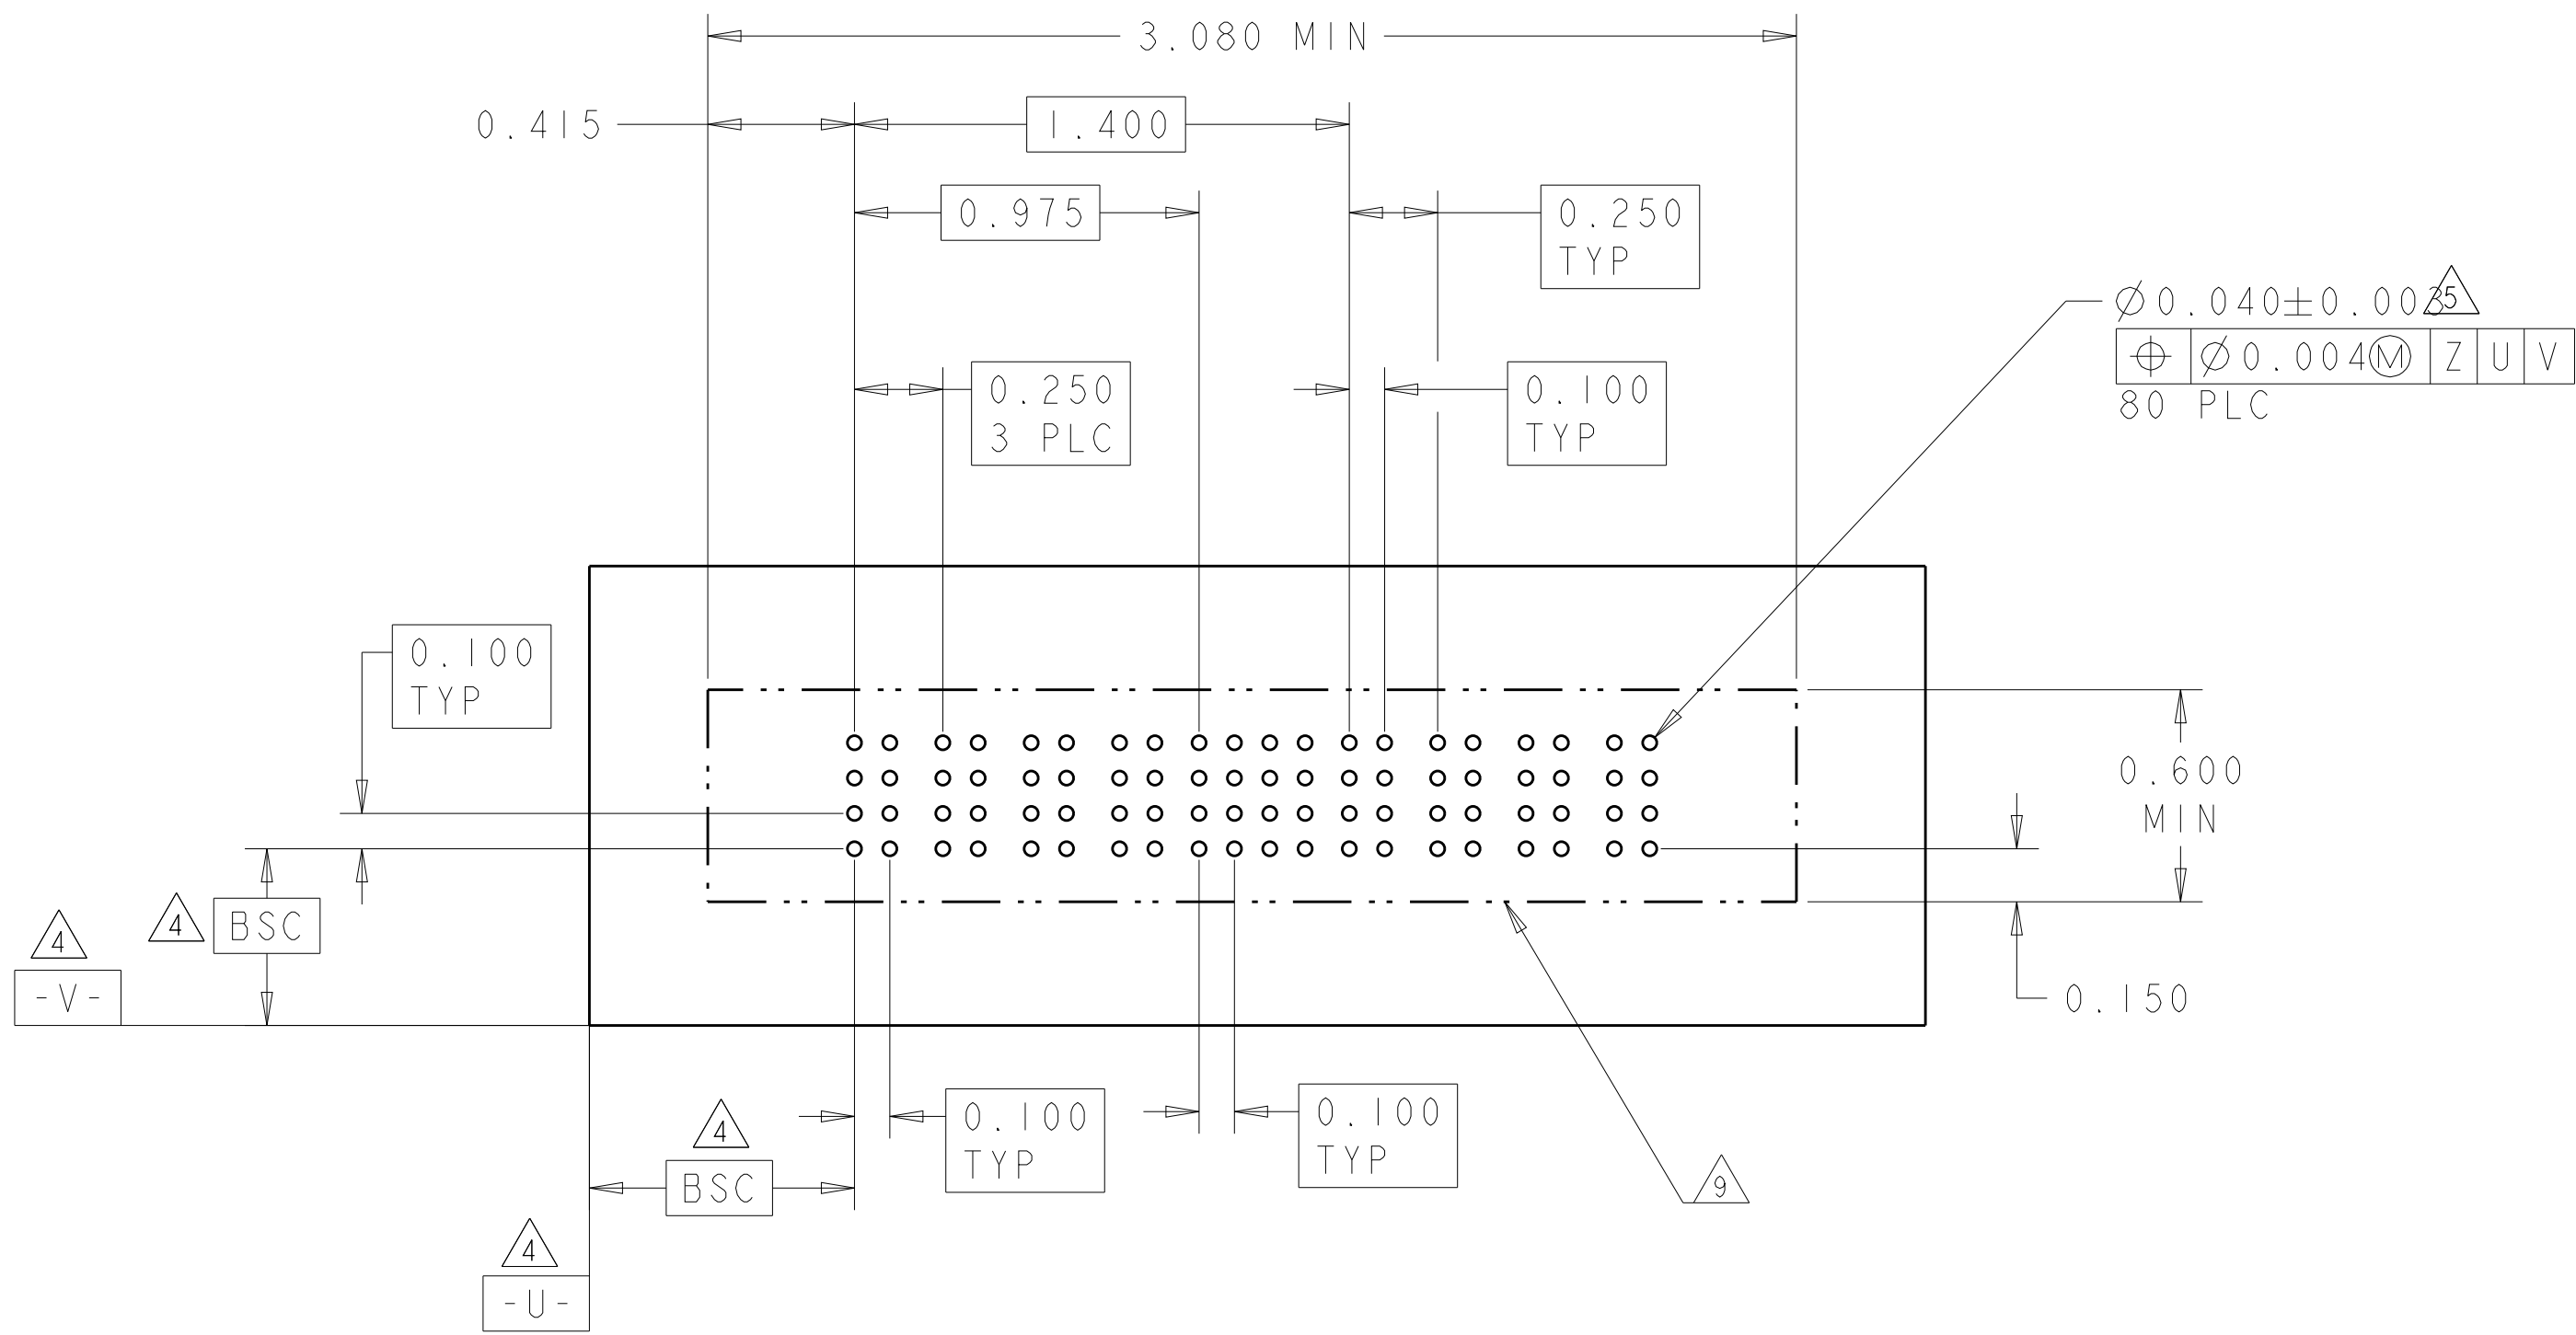4805 (3/11)

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER			SIGNAL						POWER			
			P1	P2	P3	1	2	3	4	5	6	P4	P5	P6	
3-6600333-5	D		VM	VM	VM	EV	EV	EV	EV	EV	EV	VM	VM	VM	
	C					EV	EV	EV	EV	EV	EV				
	B					EV	EV	EV	EV	EV	EV				
	A					EV	EV	EV	EV	EV	EV				
3P+24S+3P		HD													HD

PART NUMBER	ROWS		POWER		SIGNAL						POWER		
			P1	P2	1	2	3	4	5	6	P3	P4	
3-6600333-7	D		VM	VM	ES	EV	EV	EV	EV	EV	VM	VM	
	C				ES	EV	EV	EV	EV	EV			
	B				EV	EV	EV	EV	EV	EV			
	A				ES	EV	EV	EV	EV	EV			
2P+24S+2P		HD											HD

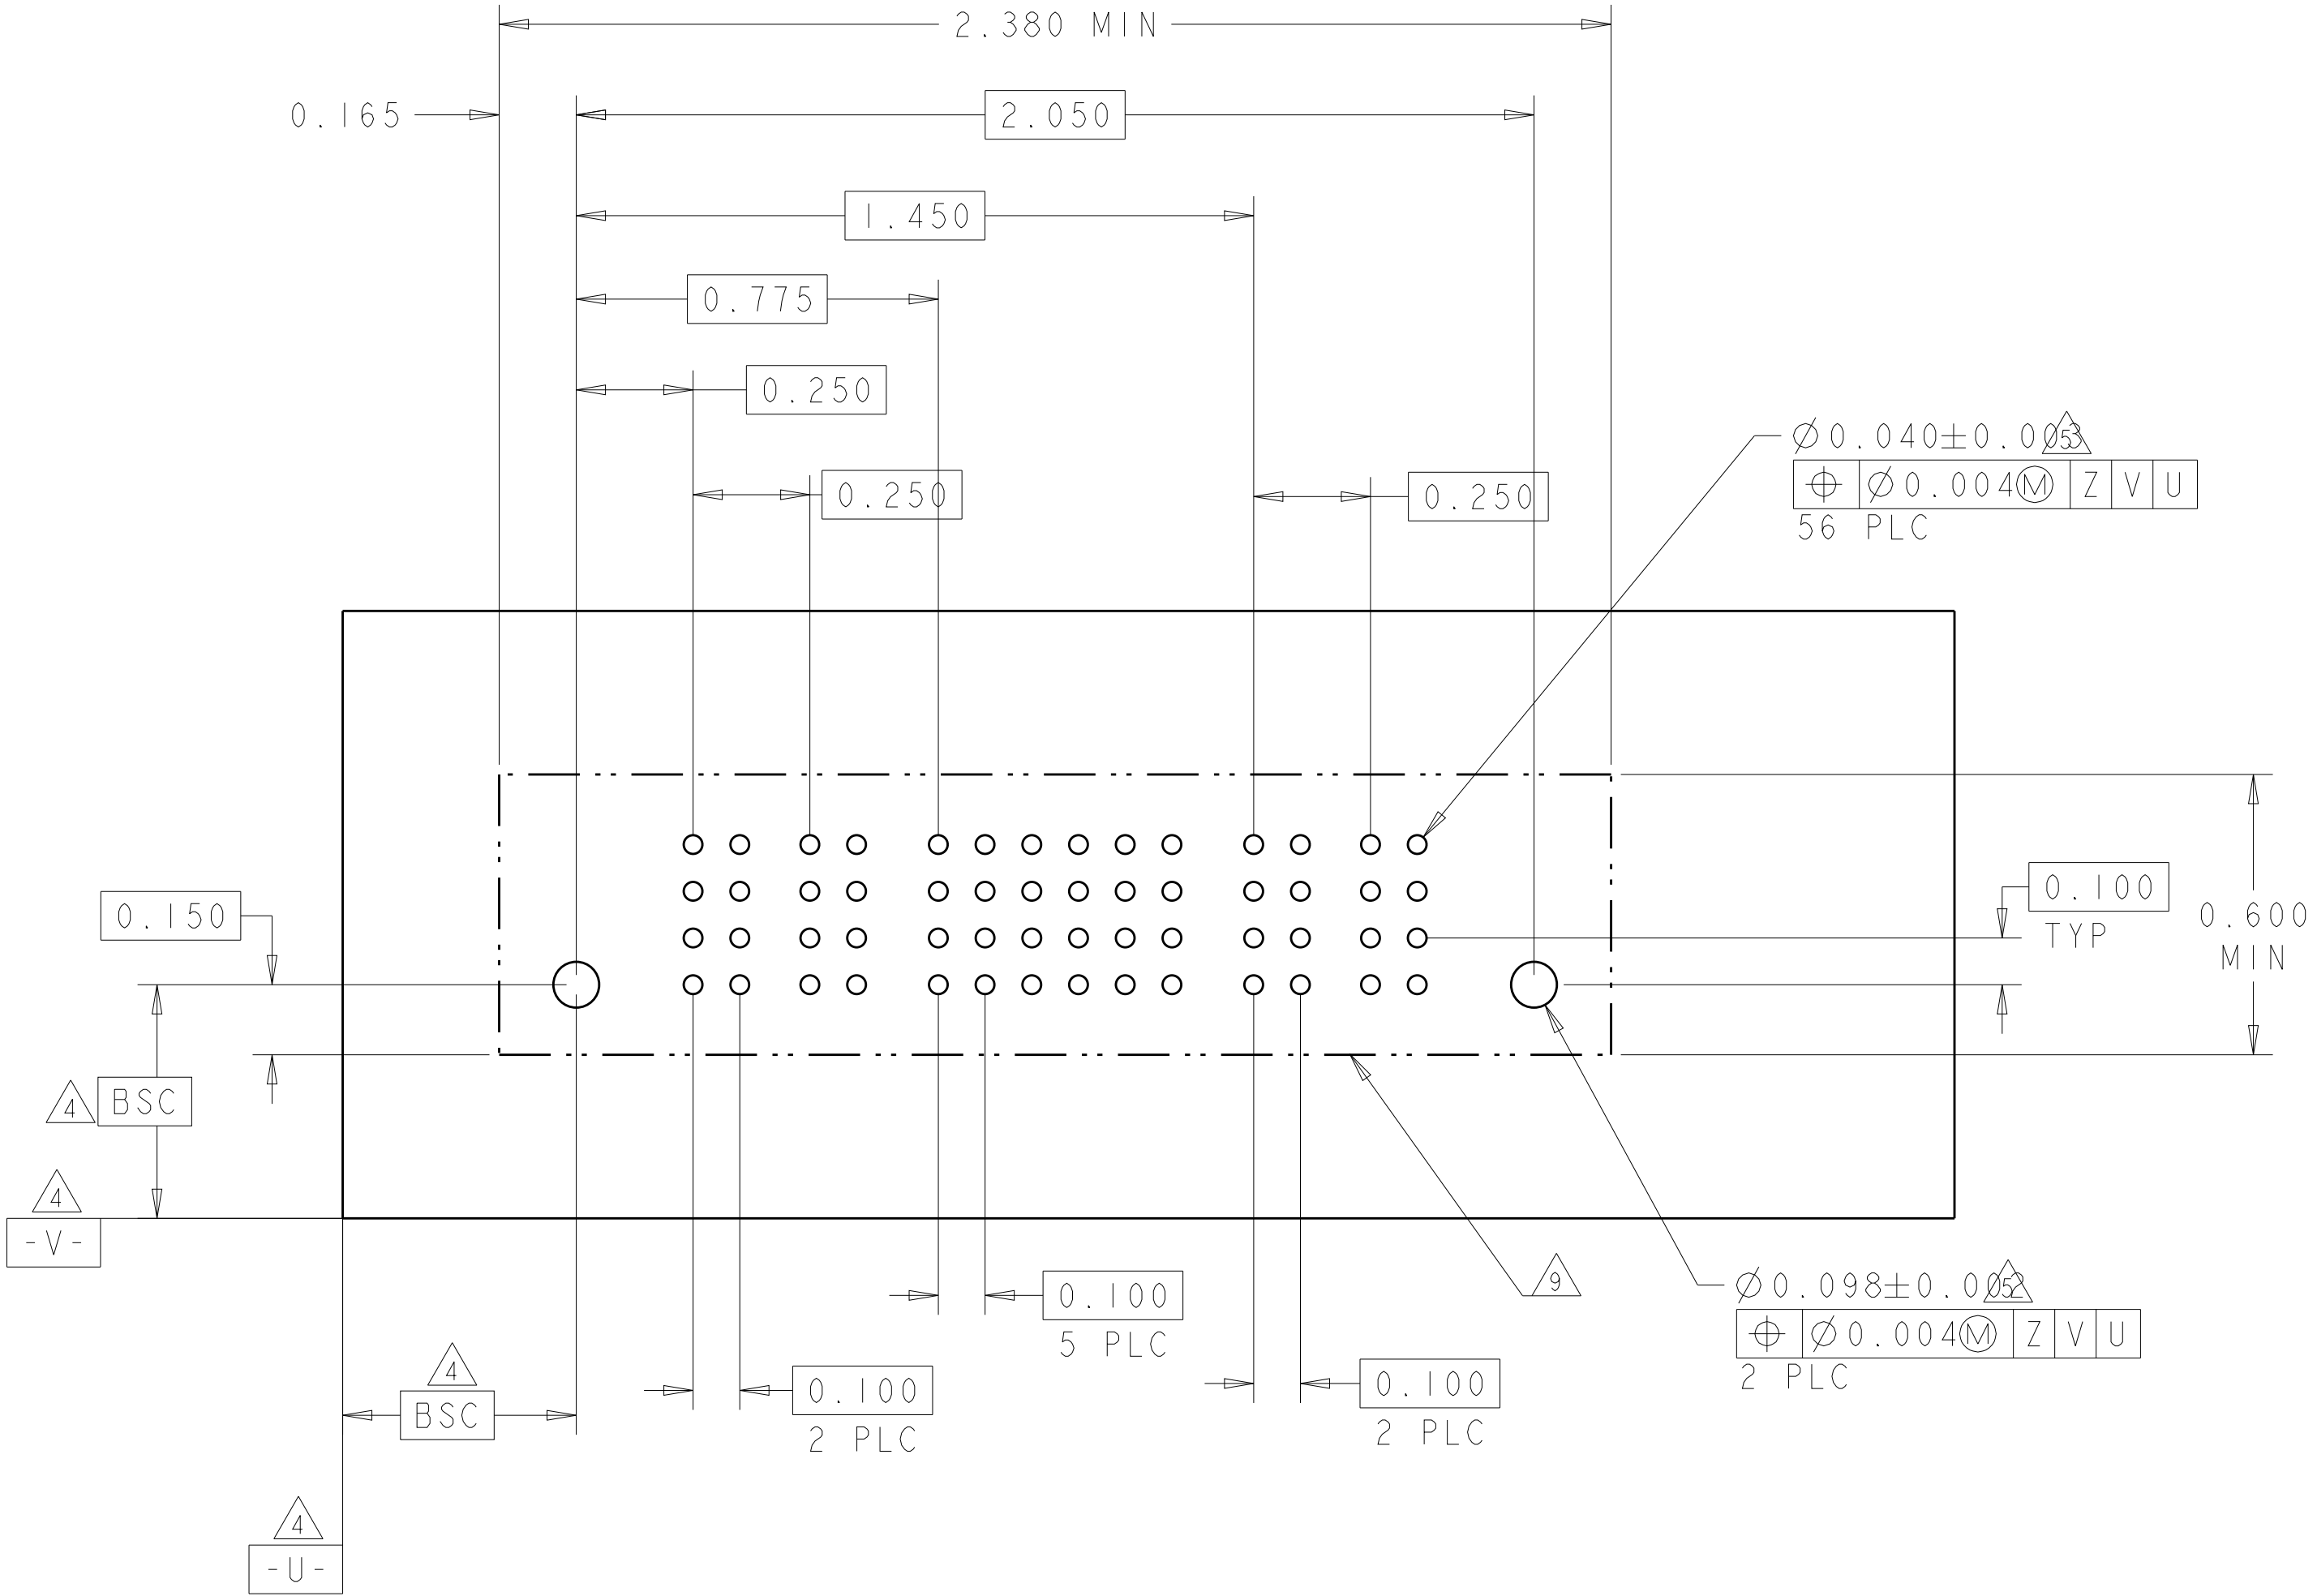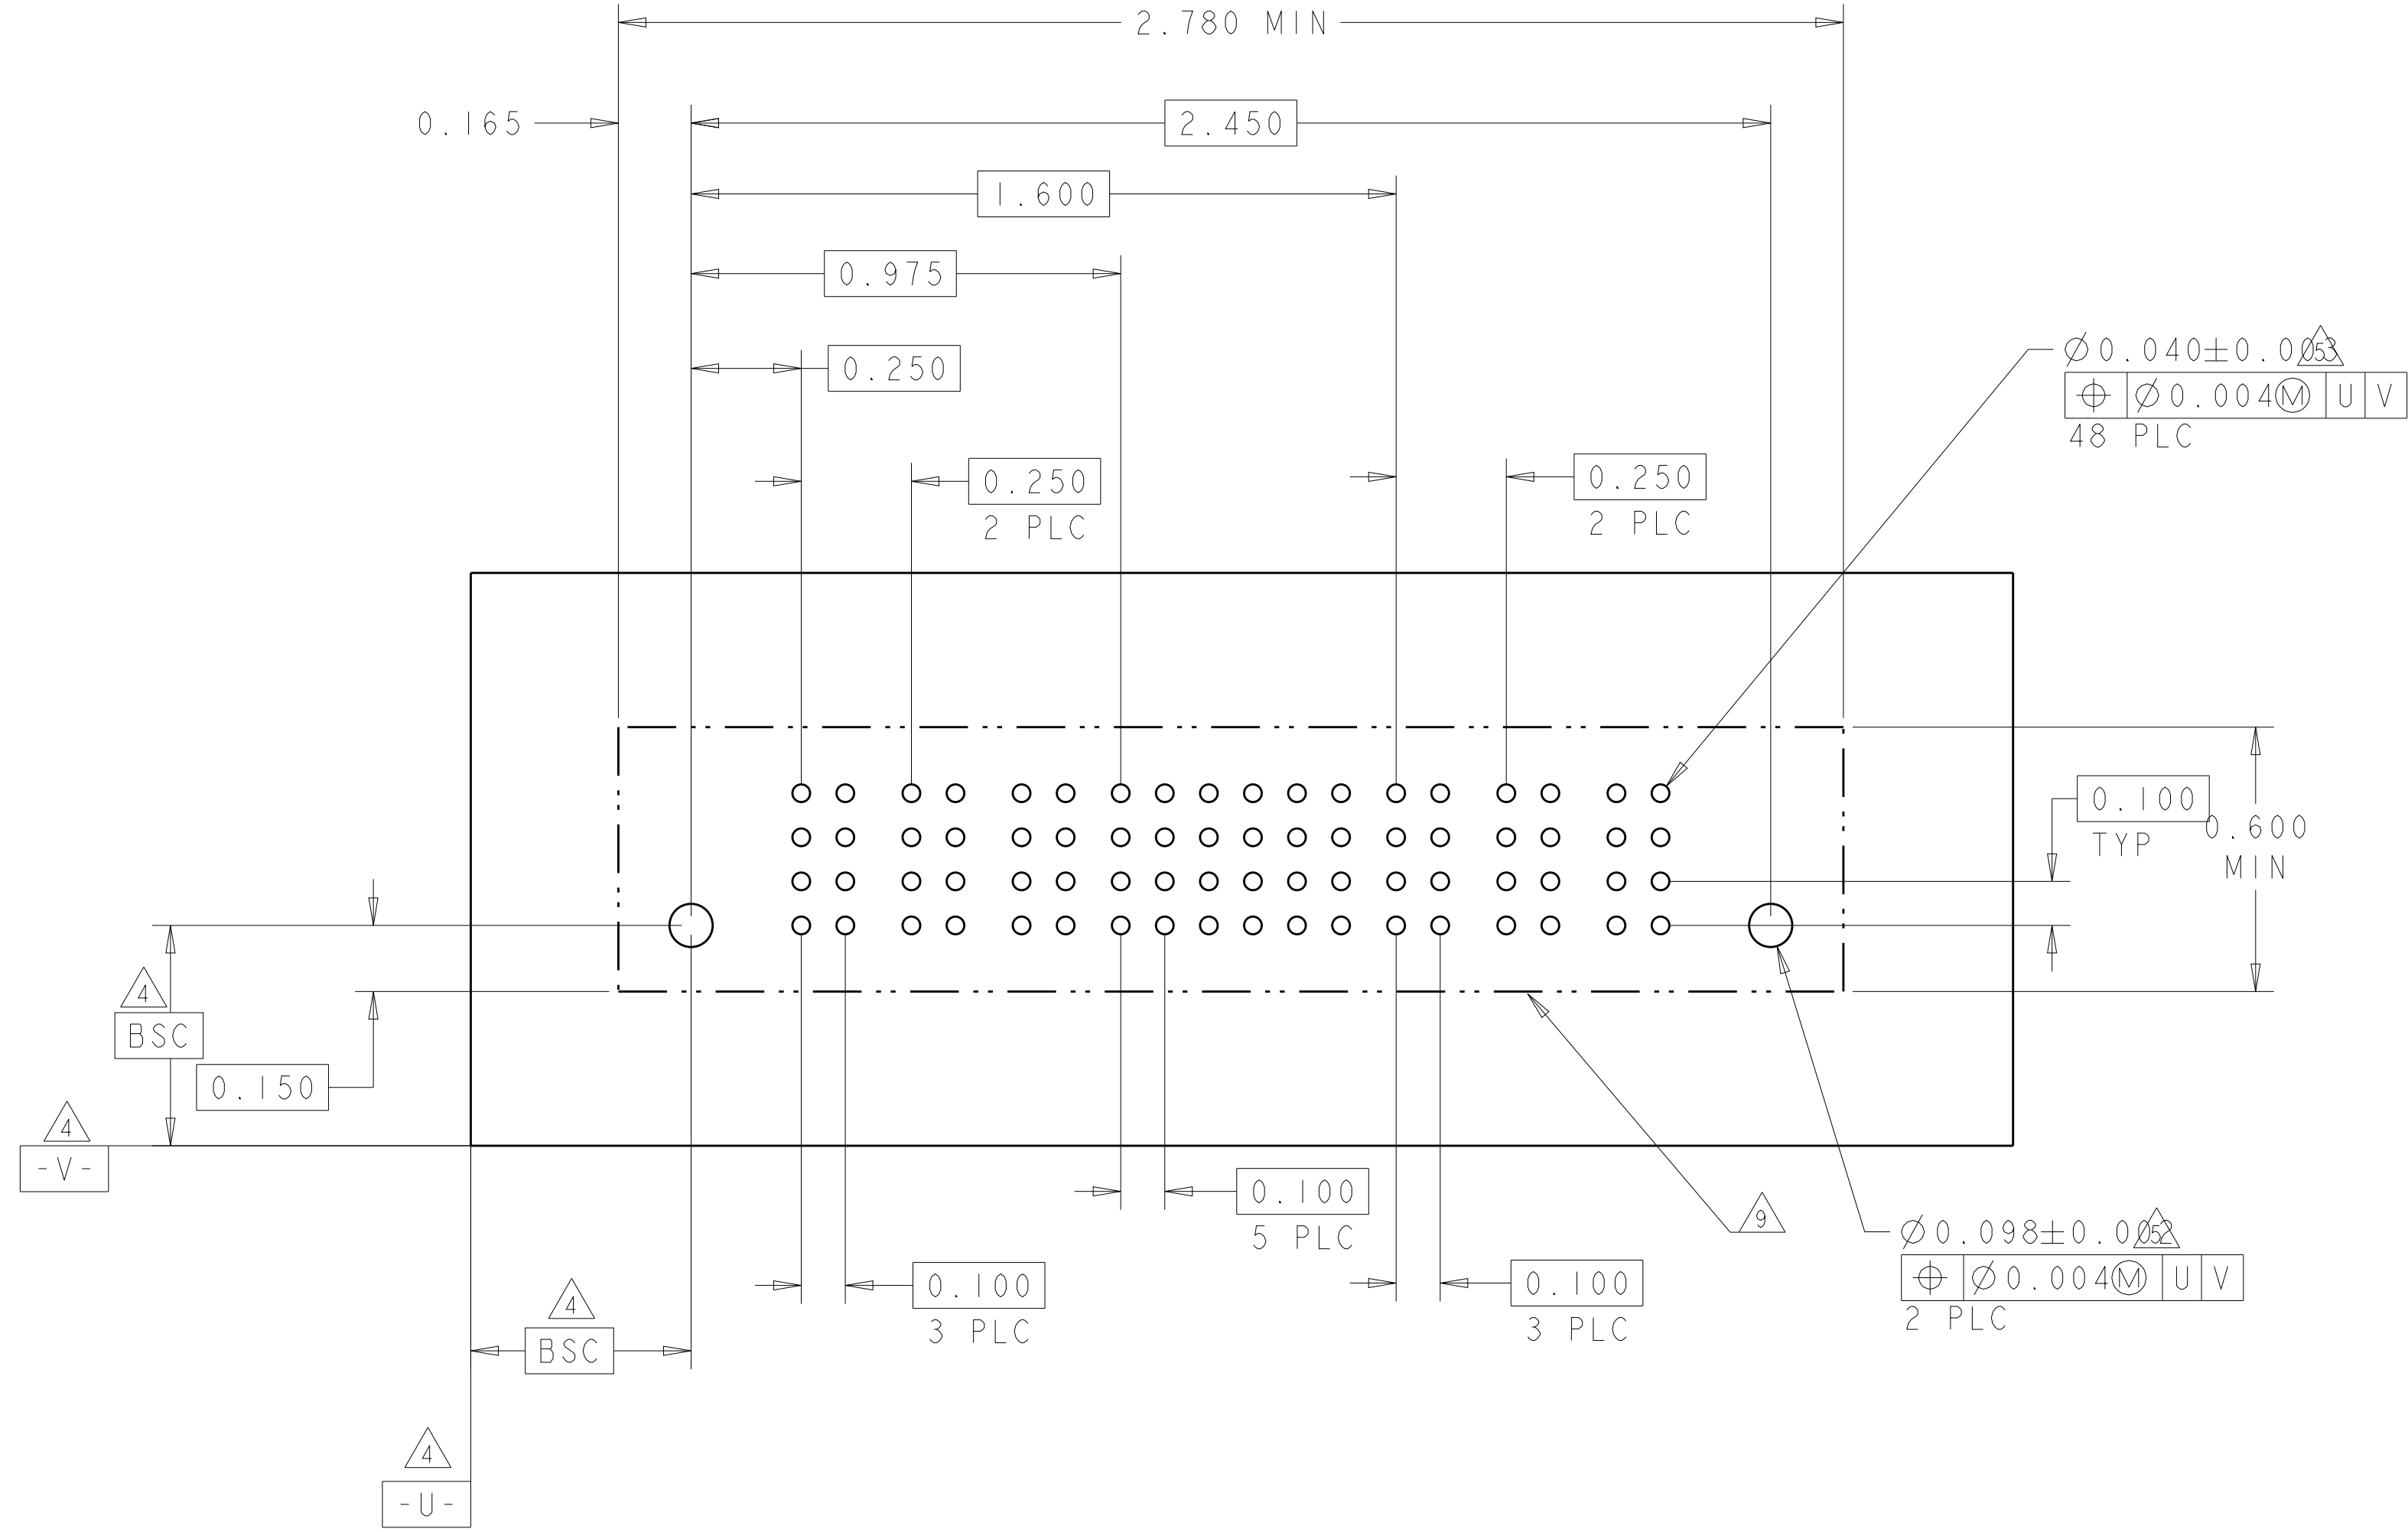

0.415

4.080 MIN

2.400

0.975

0.250
3 PLC

0.250
3 PLC

Ø 0.040 ± 0.0053
Ø 0.004 (M) U V
120 PLC

0.100
TYP

0.150

0.600 MIN

4 BSC

- V -

4 BSC

- U -

0.100
4 PLC

0.100
13 PLC

0.100
4 PLC



9

4805 (3/11)


LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER						SIGNAL		POWER						
			P1	P2	P3	P4	P5	P6	I	2	P7	P8	P9	PI0	PI1	PI2	
3-6600333-8	D		VM	VM	VM	VM	VM	VM	EV	EV	VM	VM	VM	VM	VM	VM	
	C								EV	EV							
	B								EV	EV							
	A								EV	EV							
6P+8S+6P		HD														HD	

PART NUMBER	ROWS		POWER			SIGNAL						POWER			
			P1	P2	P3	1	2	3	4	5	6	P4	P5	P6	
3-6600333-9	D		VM	VM	VM	EV	EV	EV	EV	EV	EV	VM	VM	VM	
	C					EV	EV	EV	EV	EV	EV				
	B					EV	EV	EV	EV	EV	EV				
	A					ES	EV	EV	EV	EV	EV				
3ACP+24S+3ACP		HD													HD

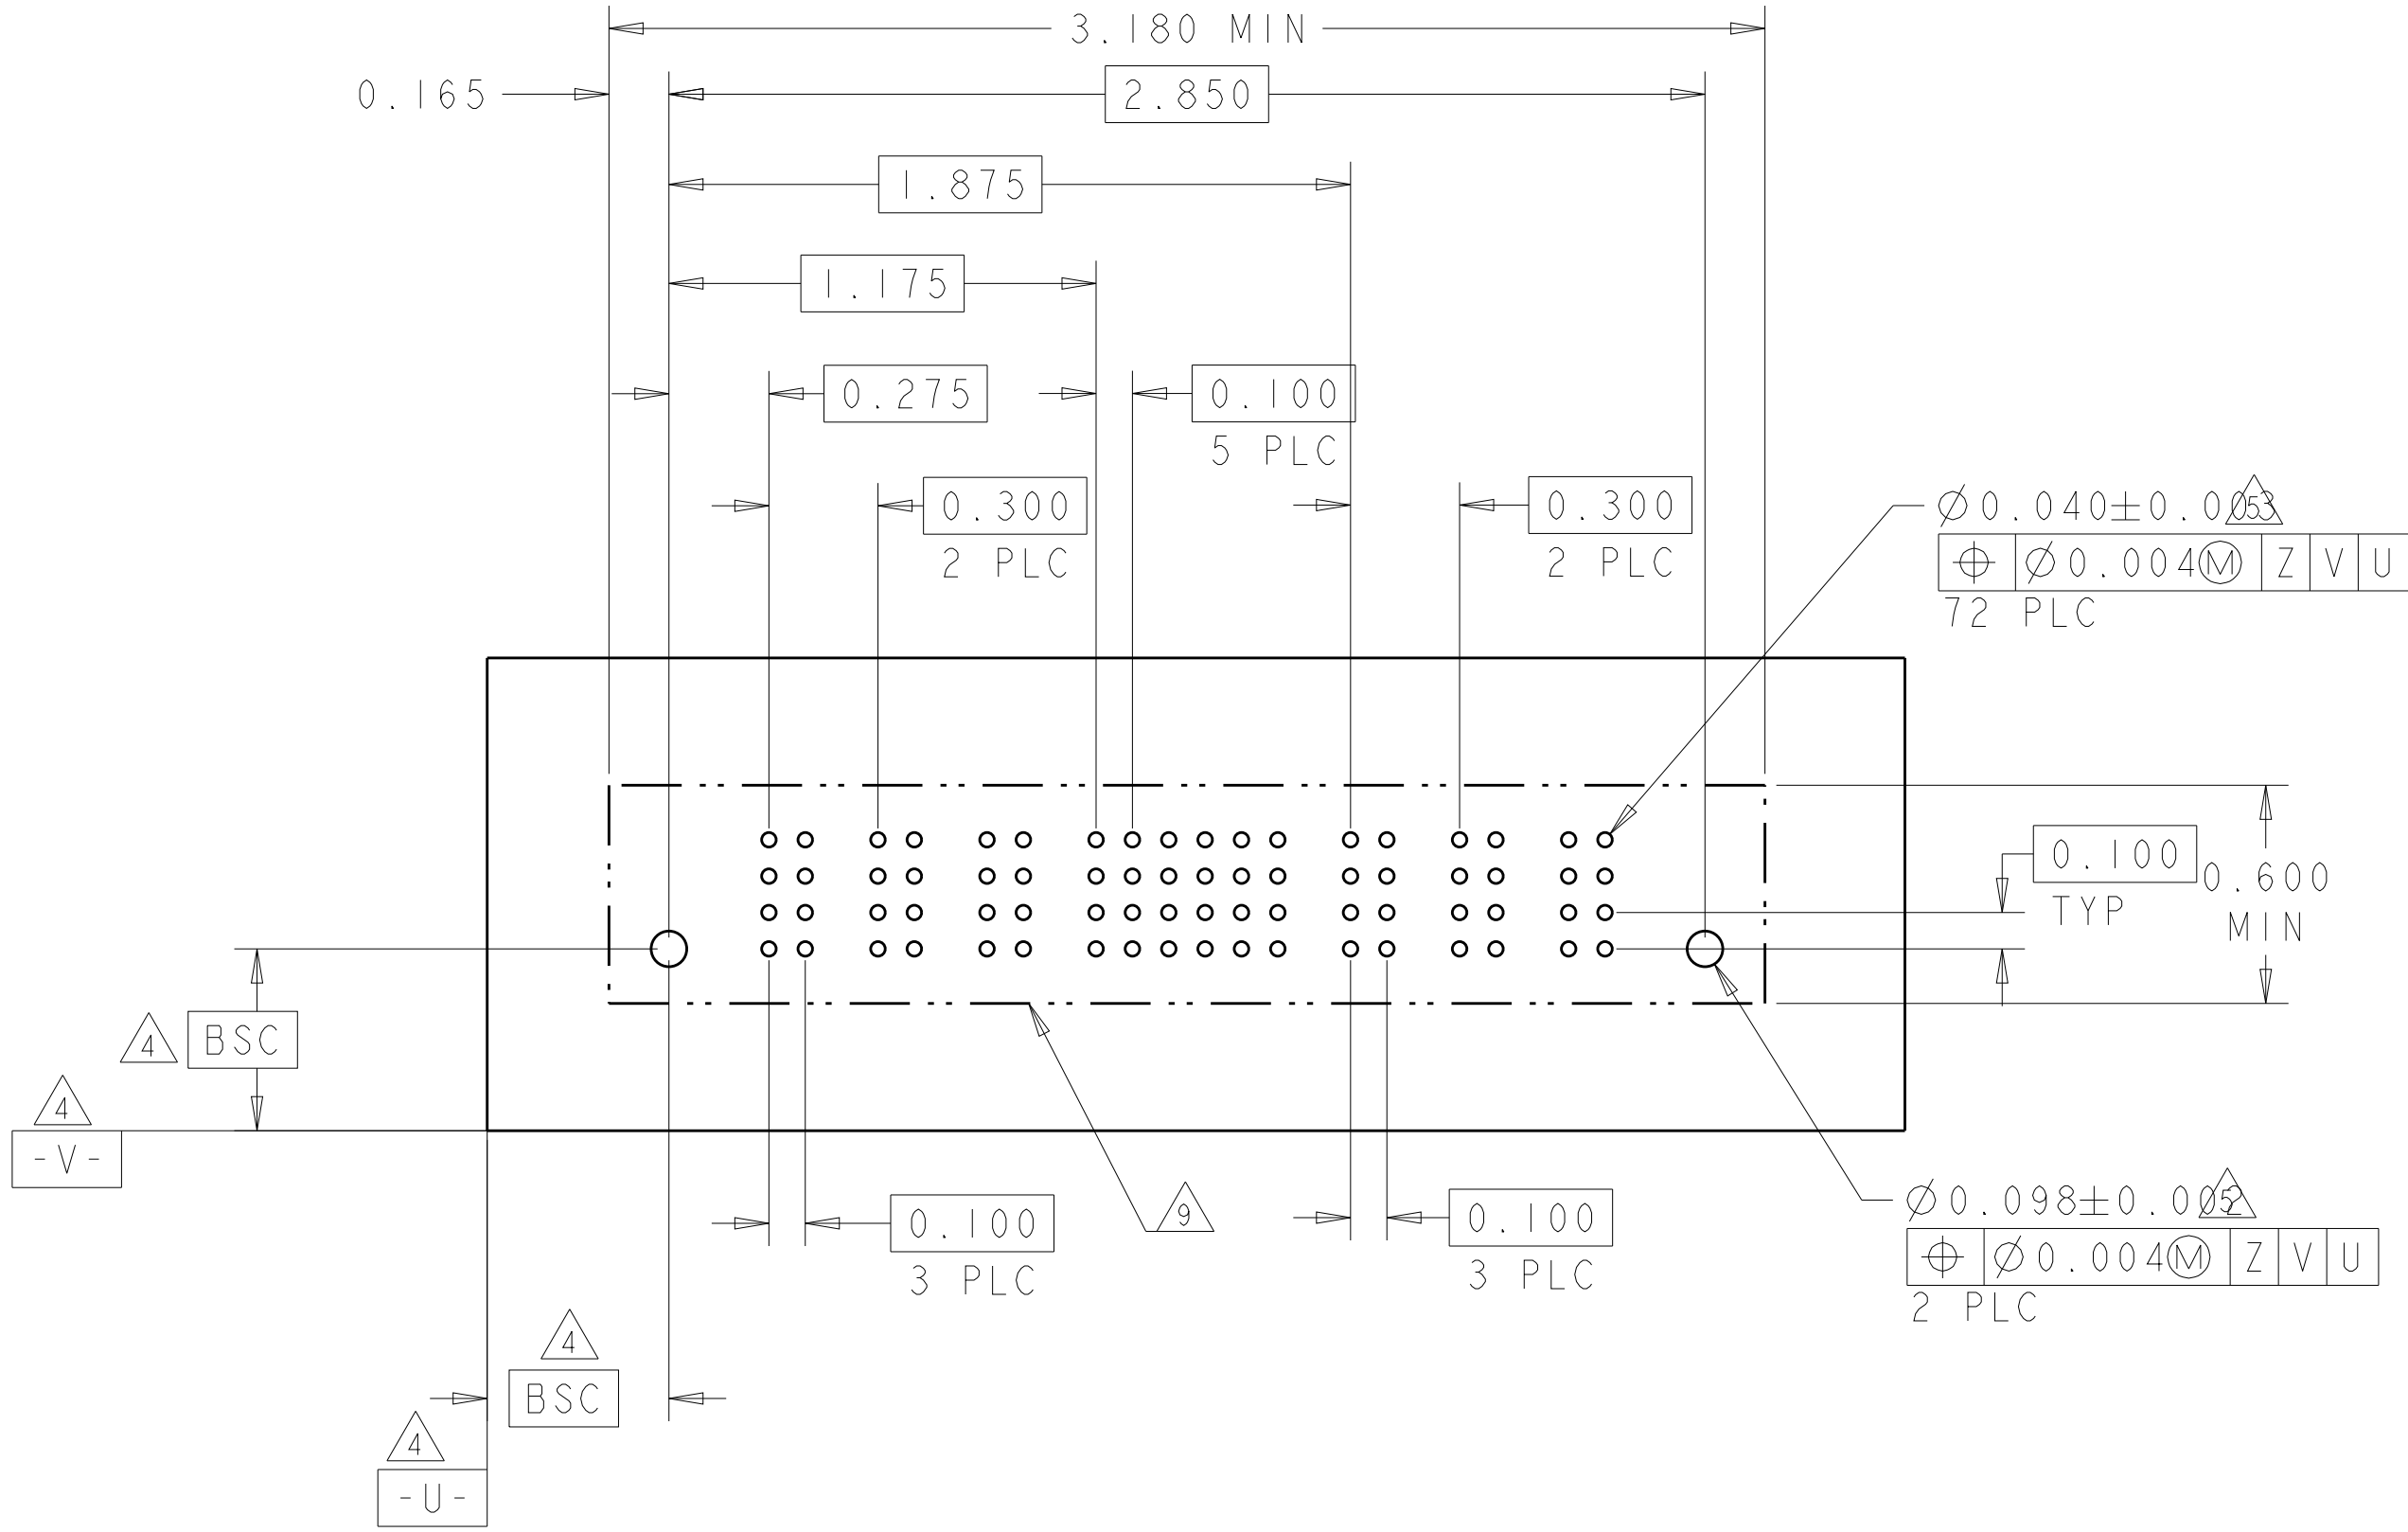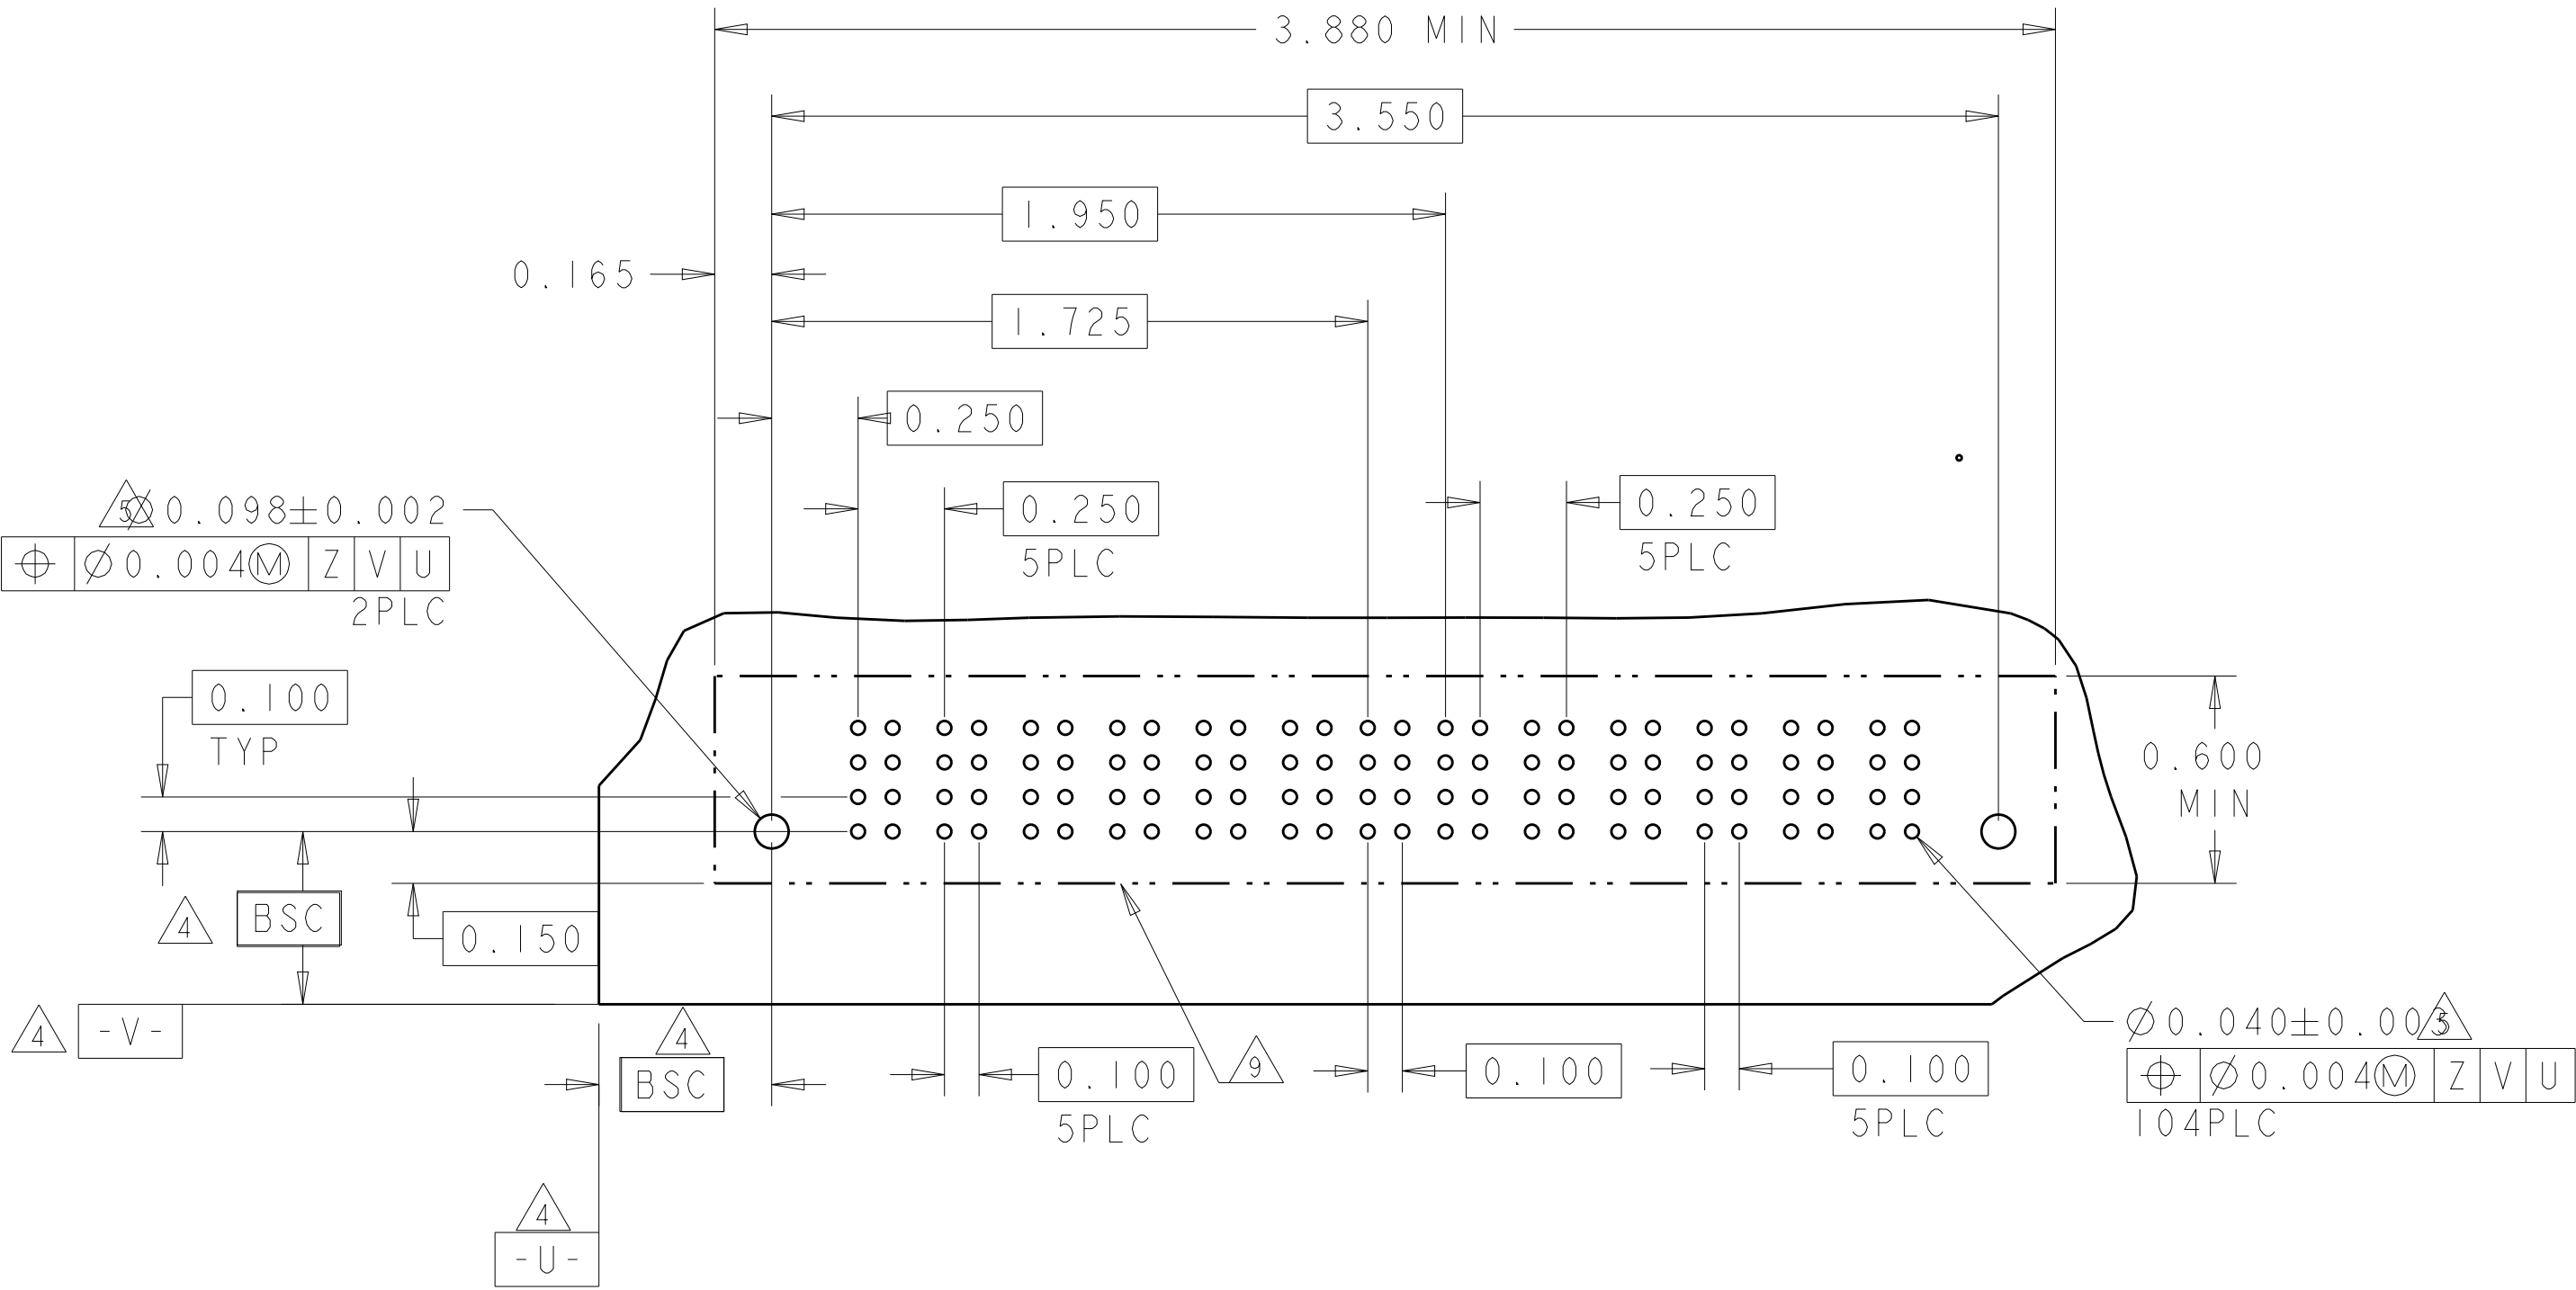



PART NUMBER	ROWS		POWER		SIGNAL			POWER	
			P1	1	2	3	P2		
4-6600333-9	D		VM	ES	EV	EV	VM		
	C			EV	EV	EV			
	B			EV	EV	EV			
	A			EV	EV	EV			
1P+12S+1P		HD							HD

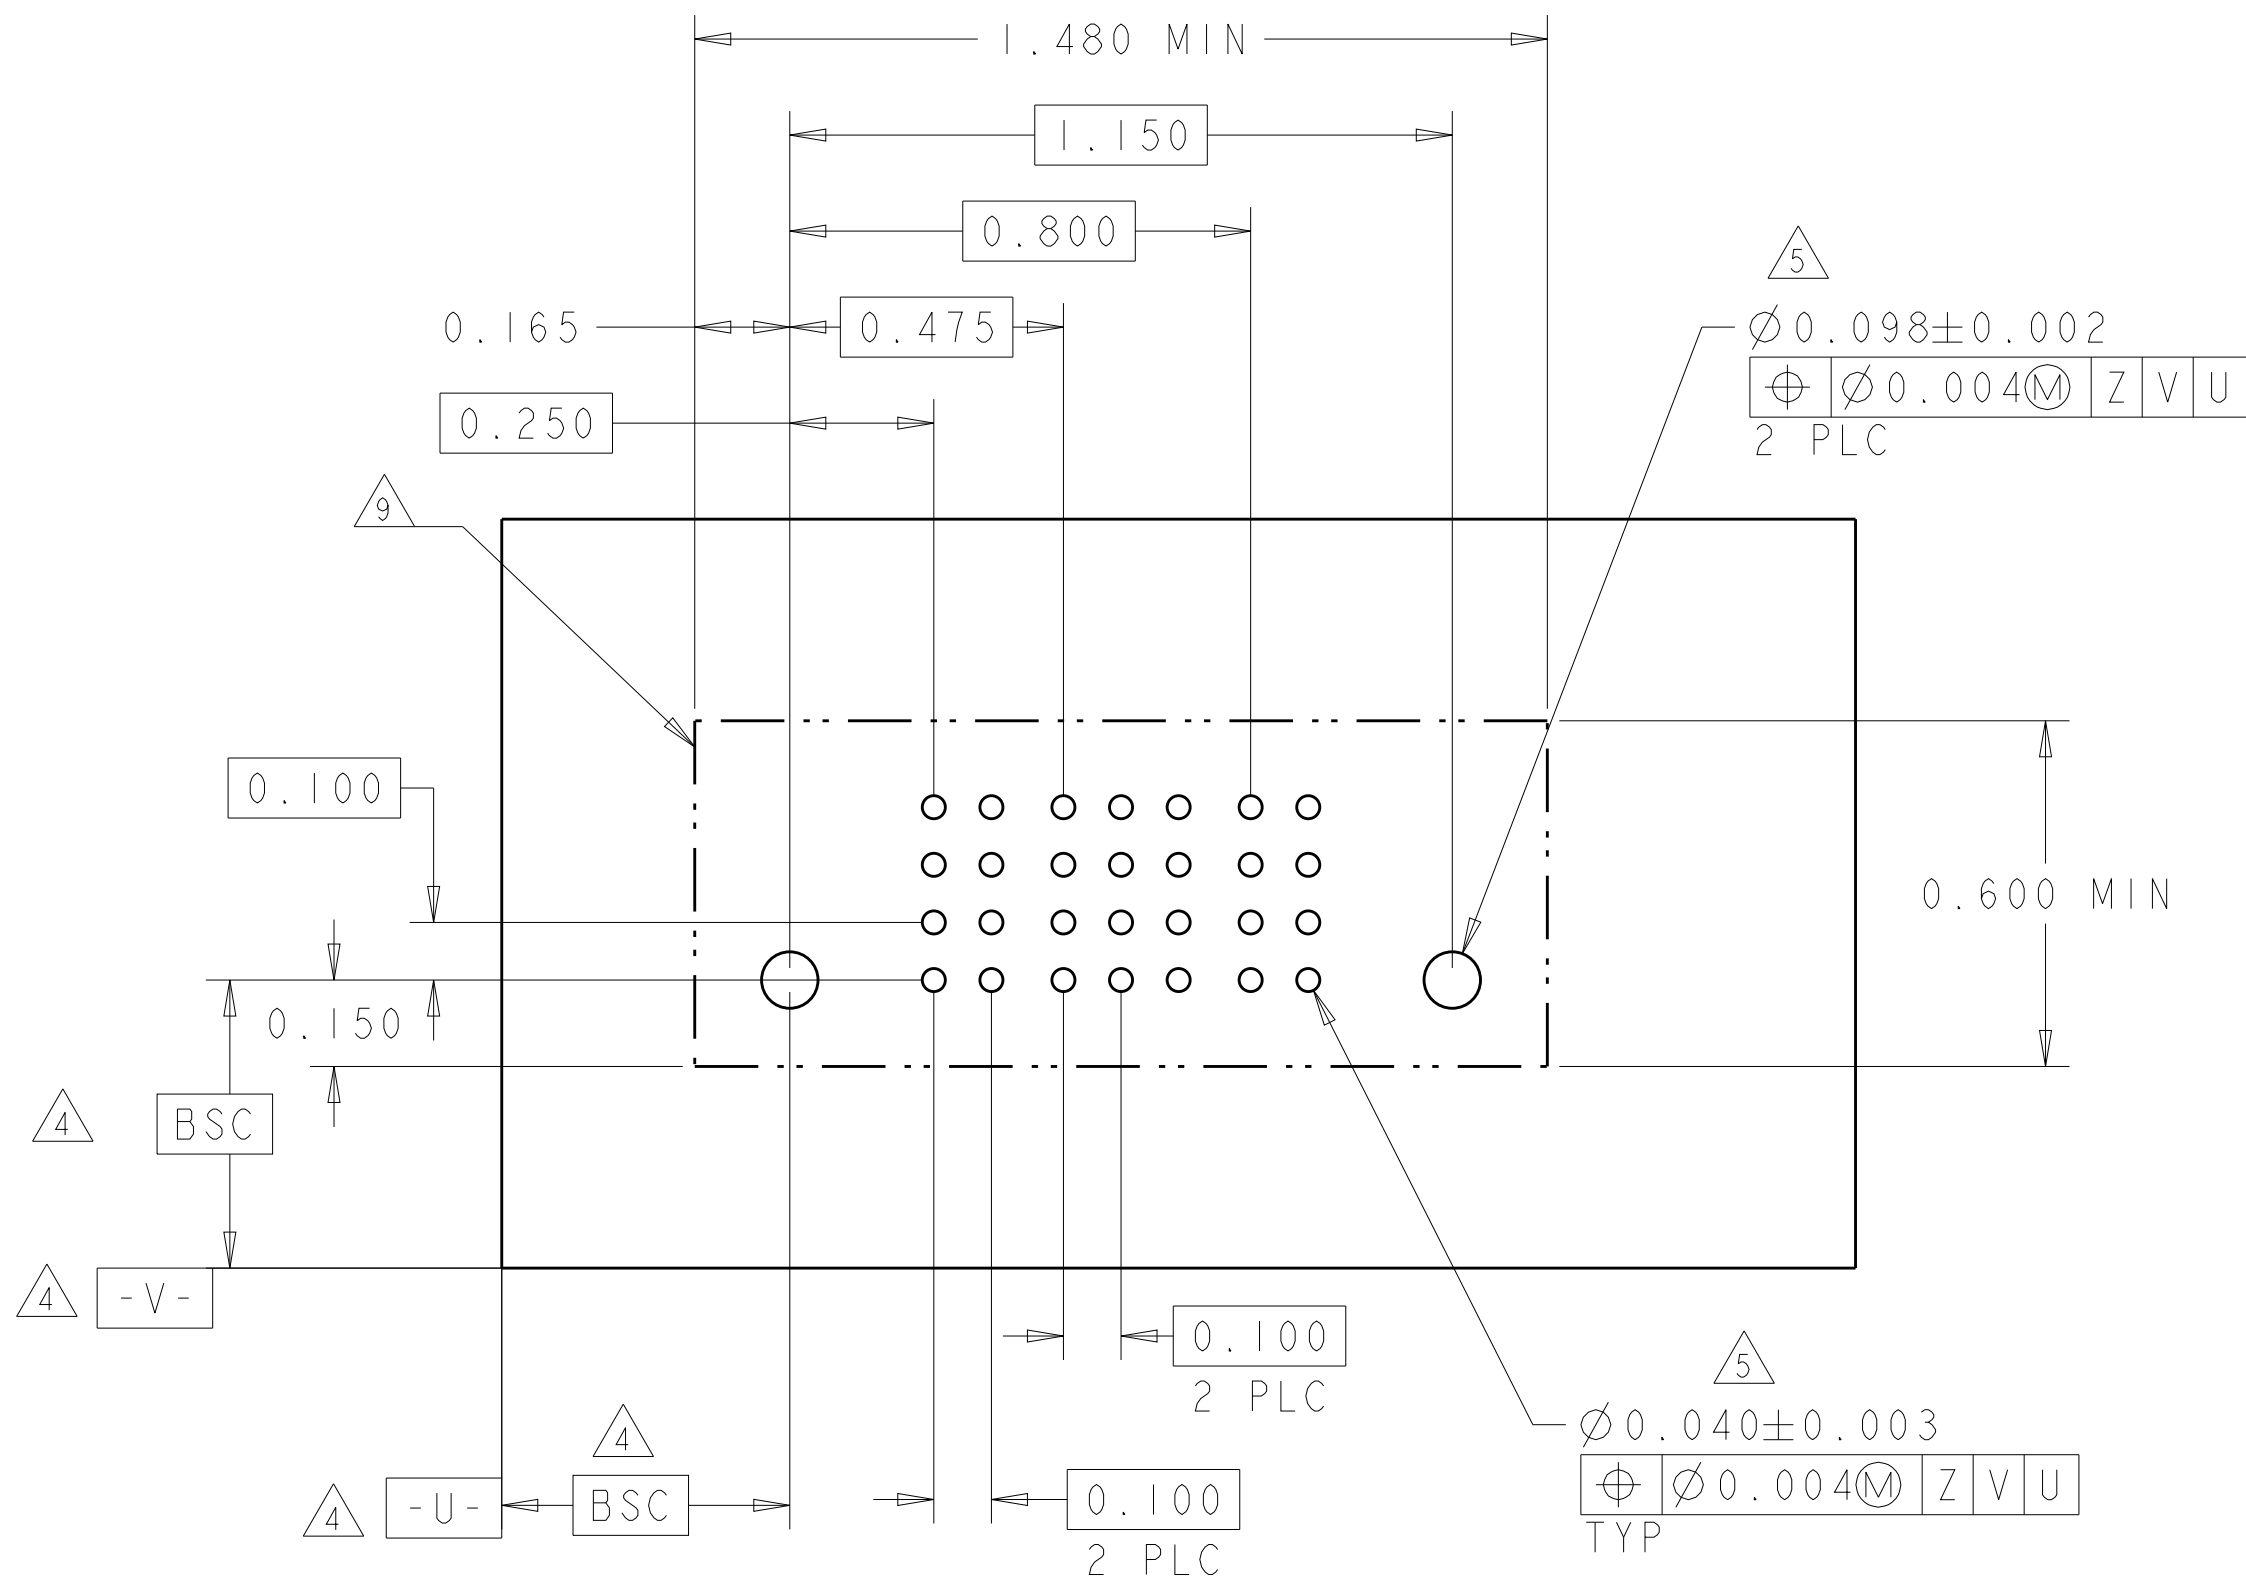4805 (3/11)

N


4805 (3/11)

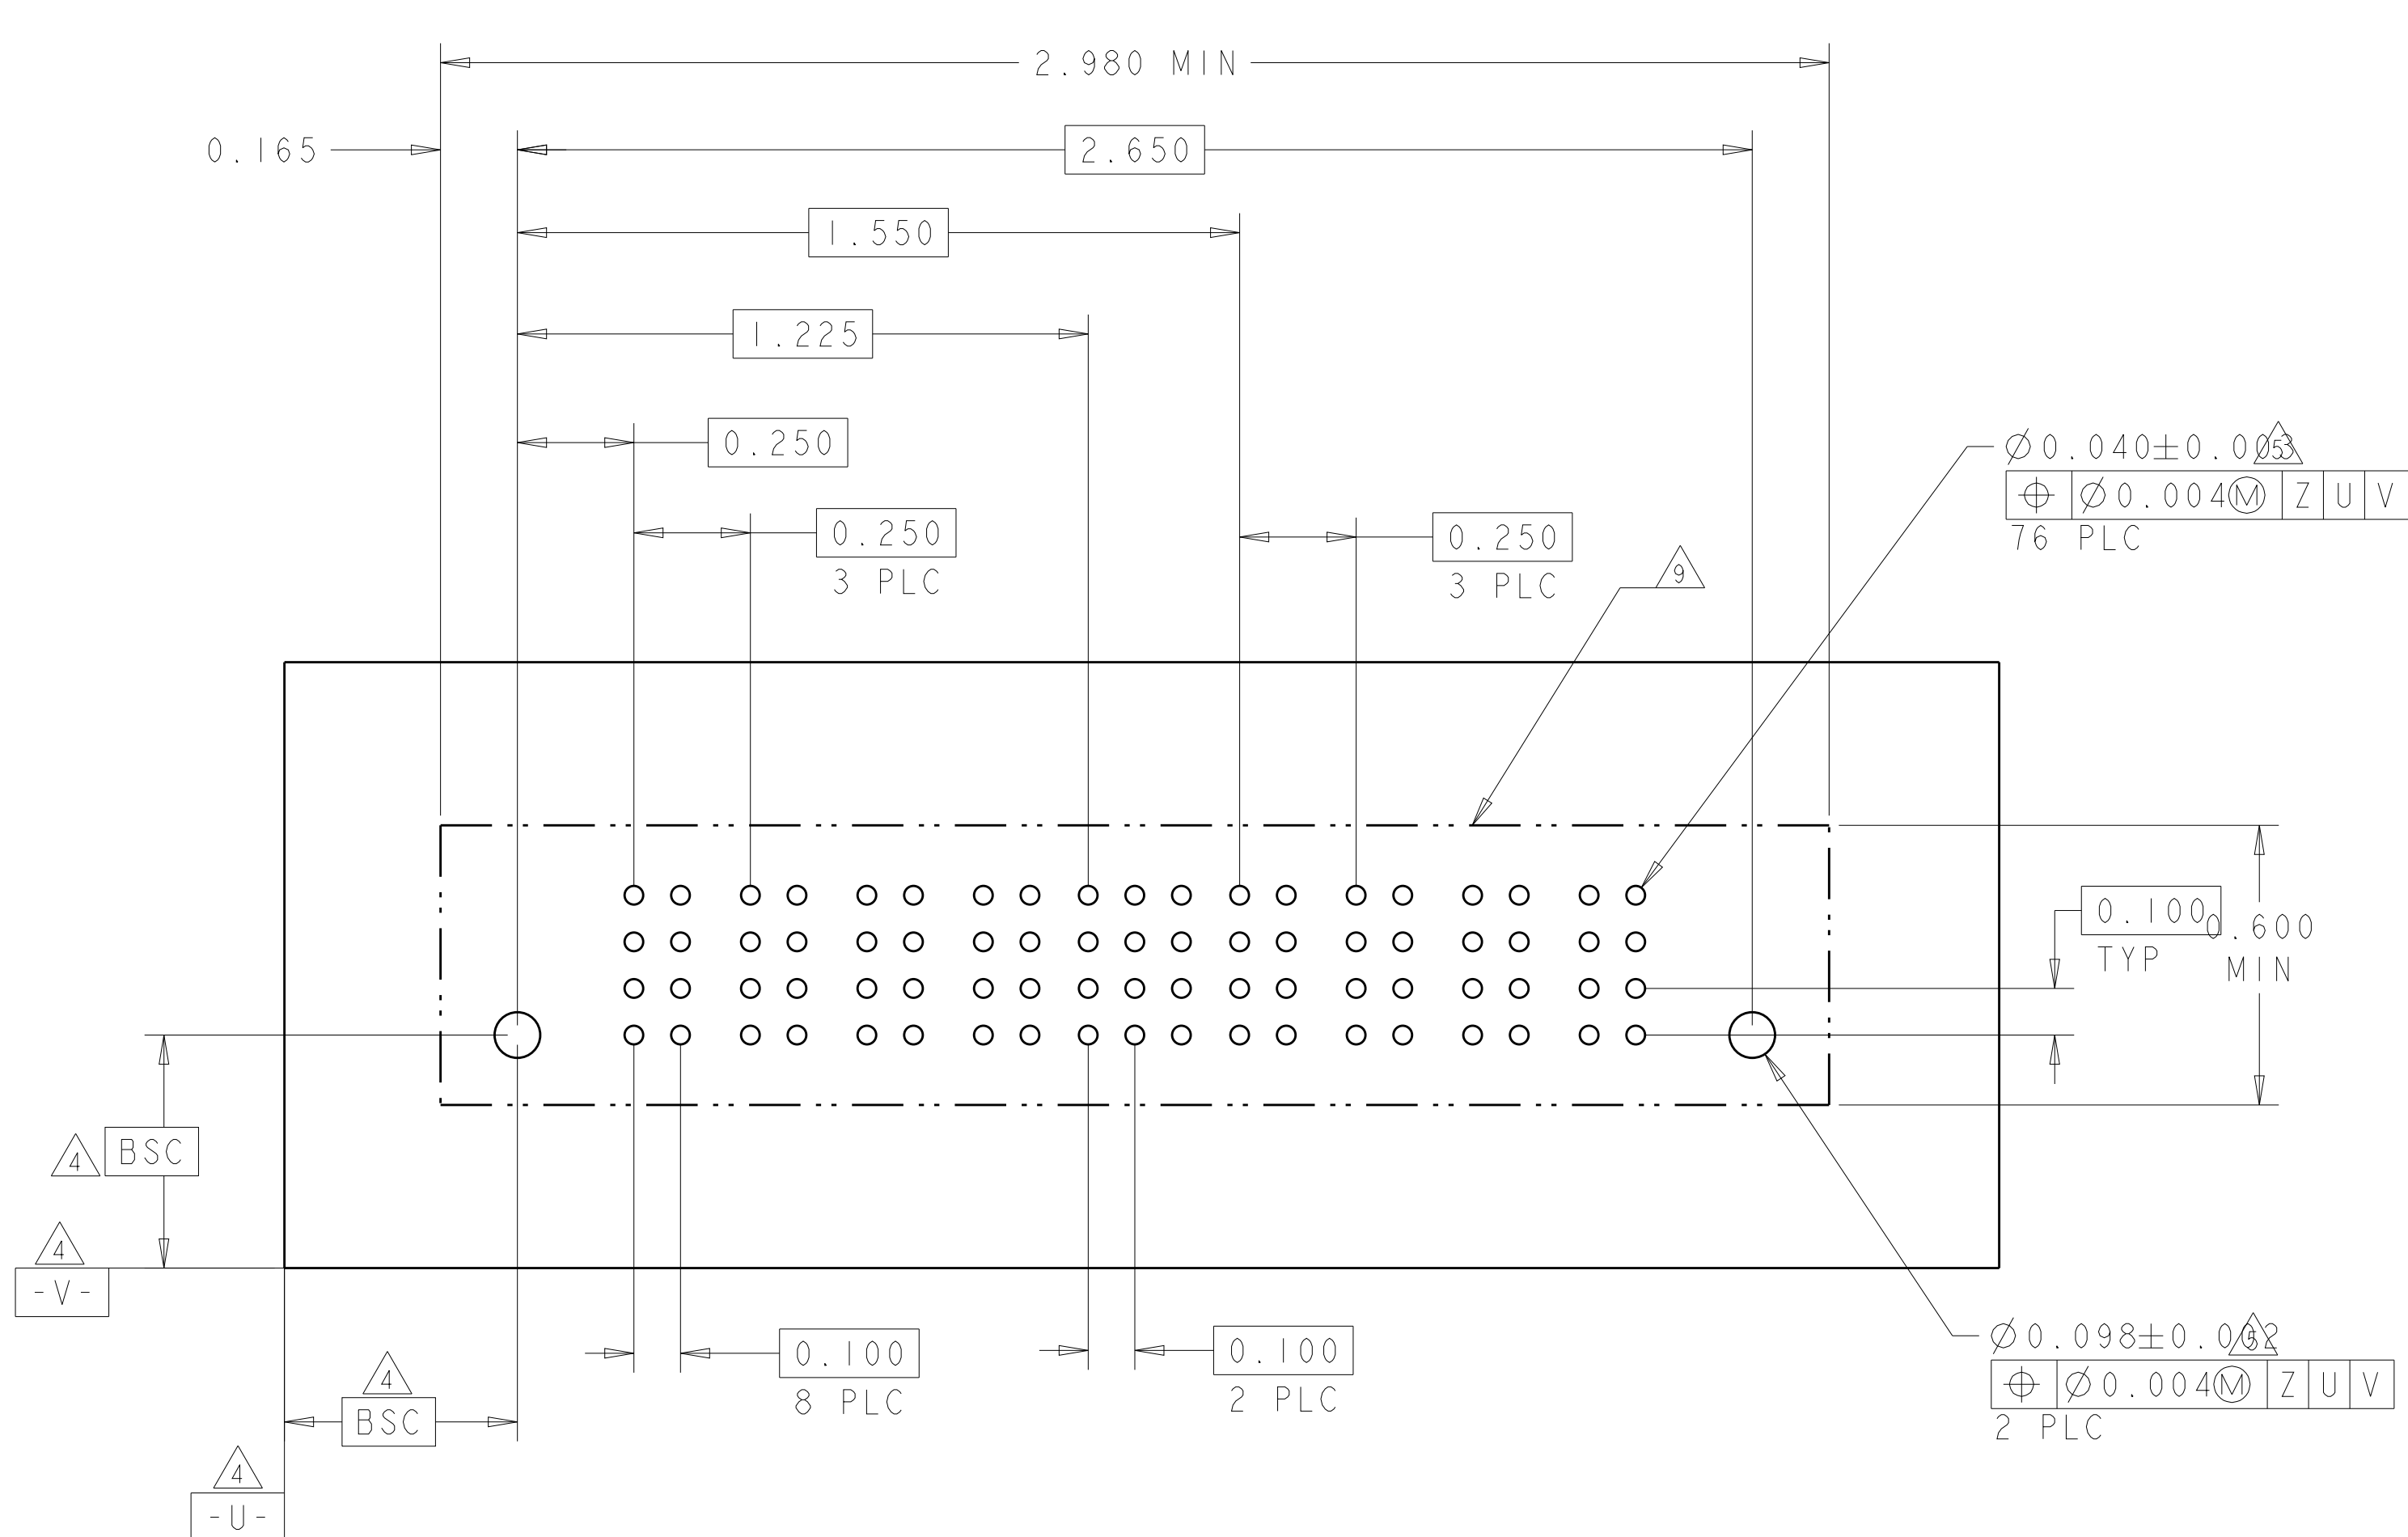[illegible]4805 (3/11)

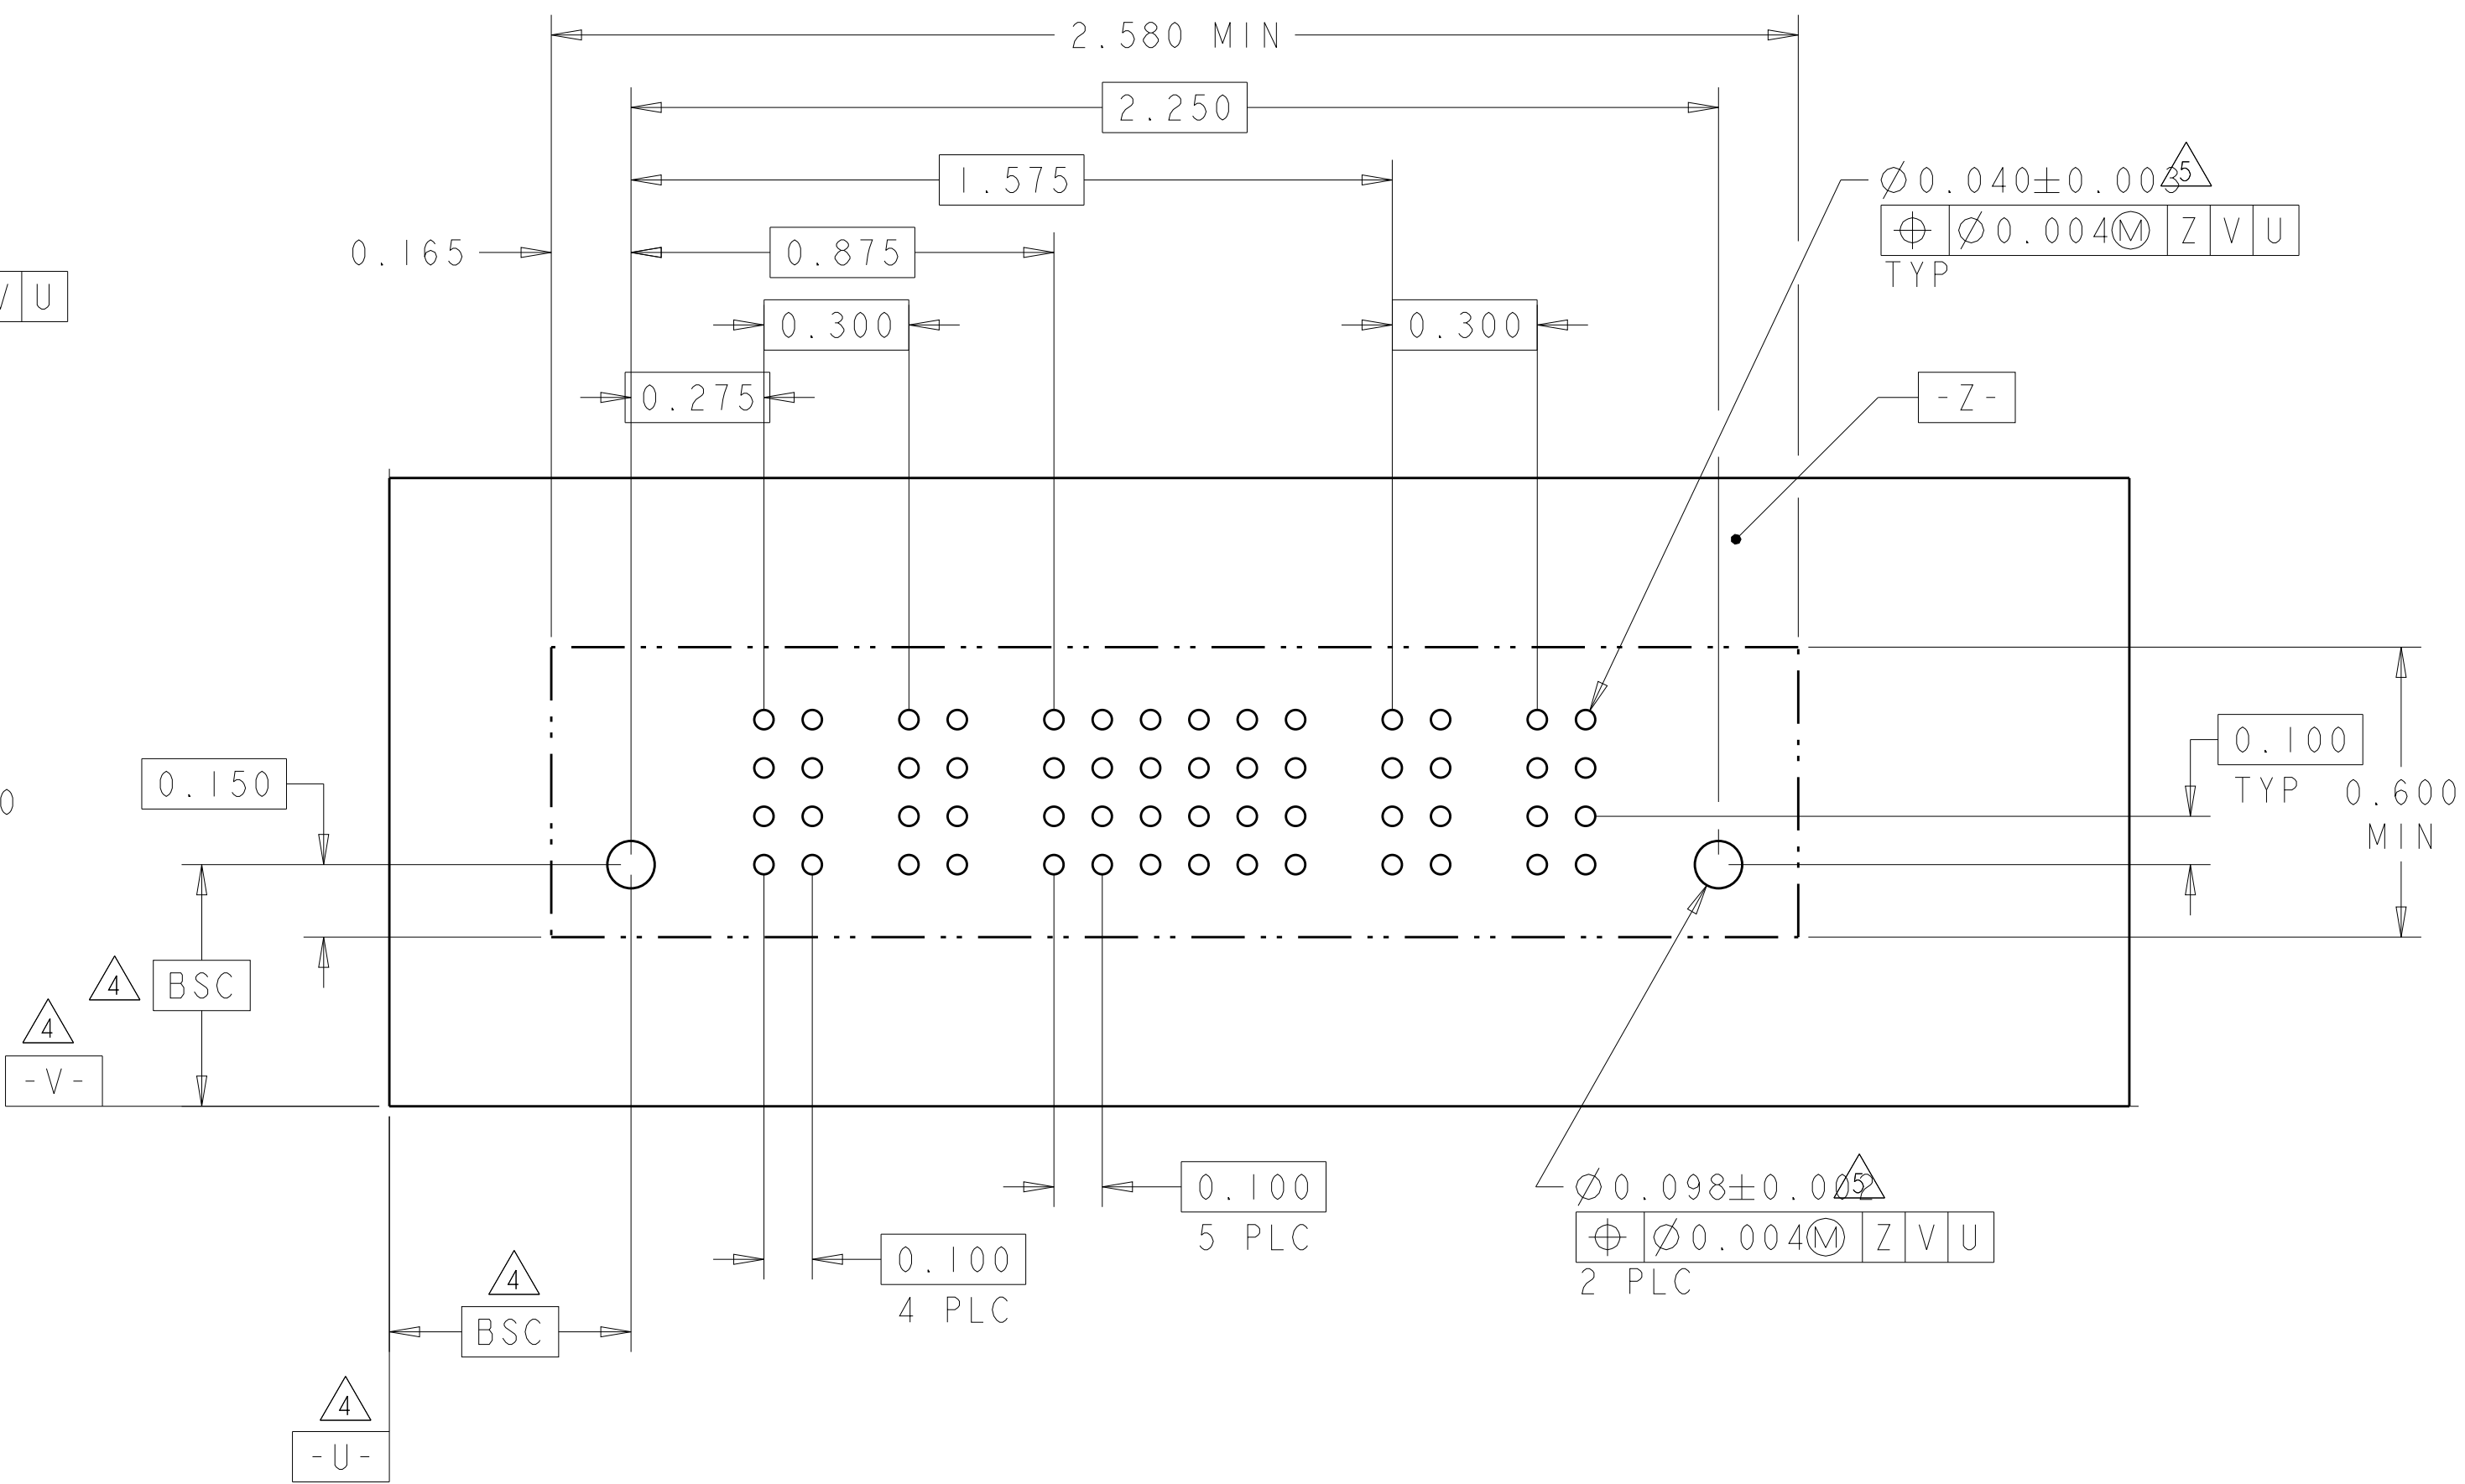[illegible]


LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER					SIGNAL						POWER						
			P1	P2	P3	P4	P5	1	2	3	4	5	6	P6	P7	P8	P9	P10	P11	
4-6600333-8	D C B A		VM	VM	VM	VM	VM	EV	EV	EV	EV	EV	EV	VM	VM	VM	VM	VM	VM	
								EV	EV	EV	EV	EV	EV							
								EV	EV	EV	EV	EV	EV							
								EV	EV	EV	EV	EV	ES							
5P + 24S + 6P																				

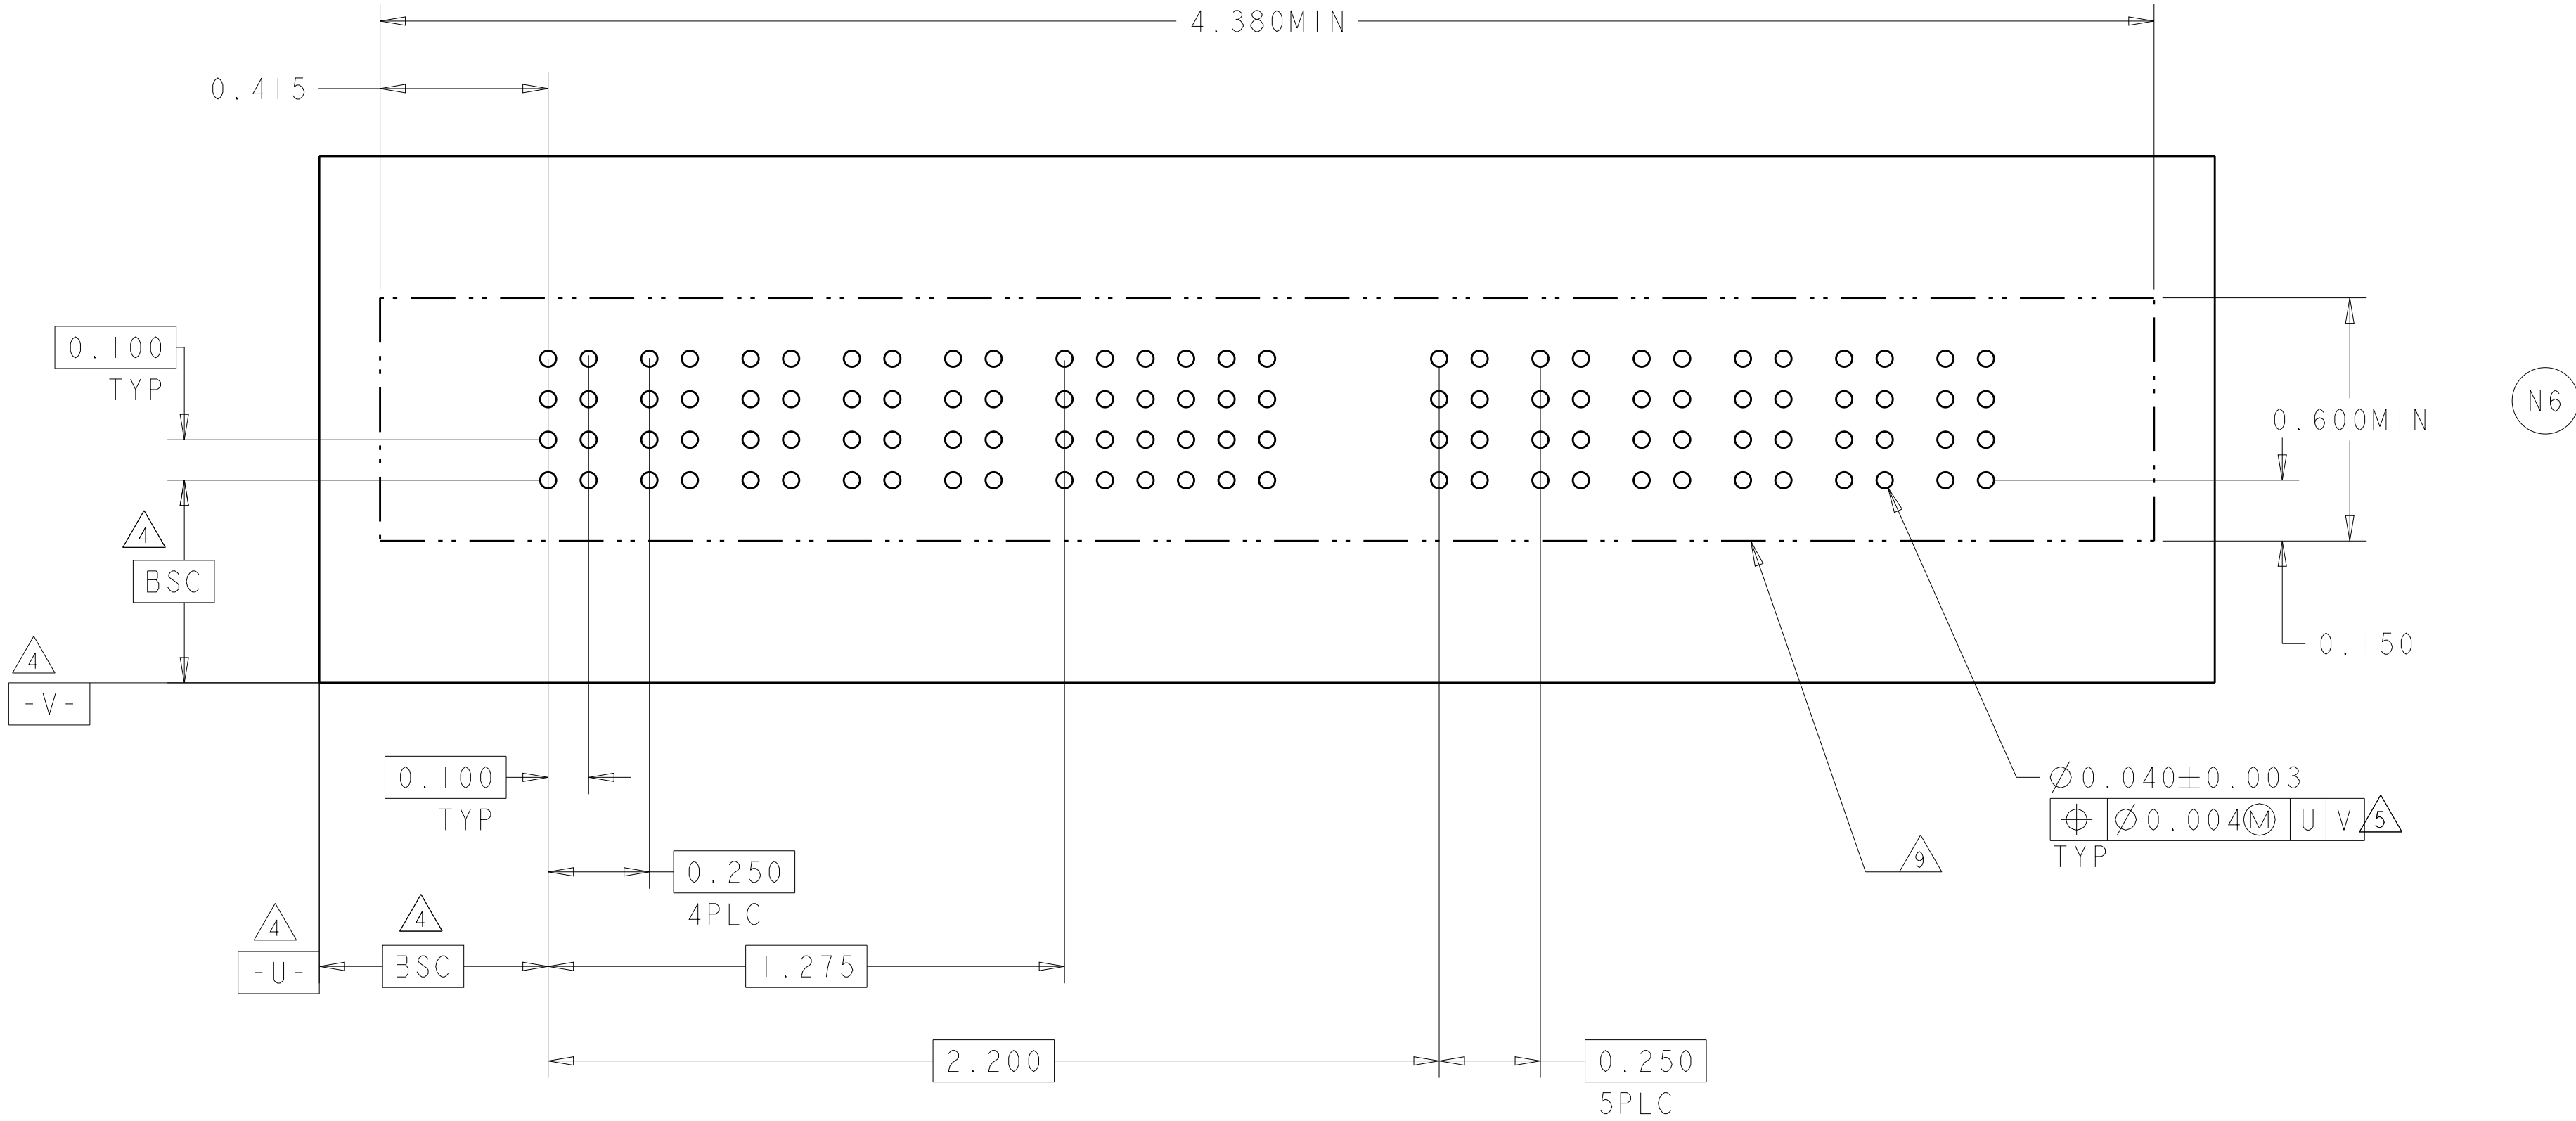


RECOMMENDED PCB LAYOUT 4-6600333-8

PART NUMBER	ROWS		POWER						SIGNAL												POWER																																																																																																																																																																																																																																																																																																																				
			P1	P2	P3	P4	P5	P6	1	2	3	4	5	6	7	8	9	10	11	12	P7	P8	P9	P10	P11																																																																																																																																																																																																																																																																																																																
5-6600333-1	D C B A							ES	ES	ES	ES	ES	ES	ES	ES	ES	ES	ES	ES	ES	ES	ES	ES	ES	ES	ES	EV																																																																																																																																																																																																																																																																																																														

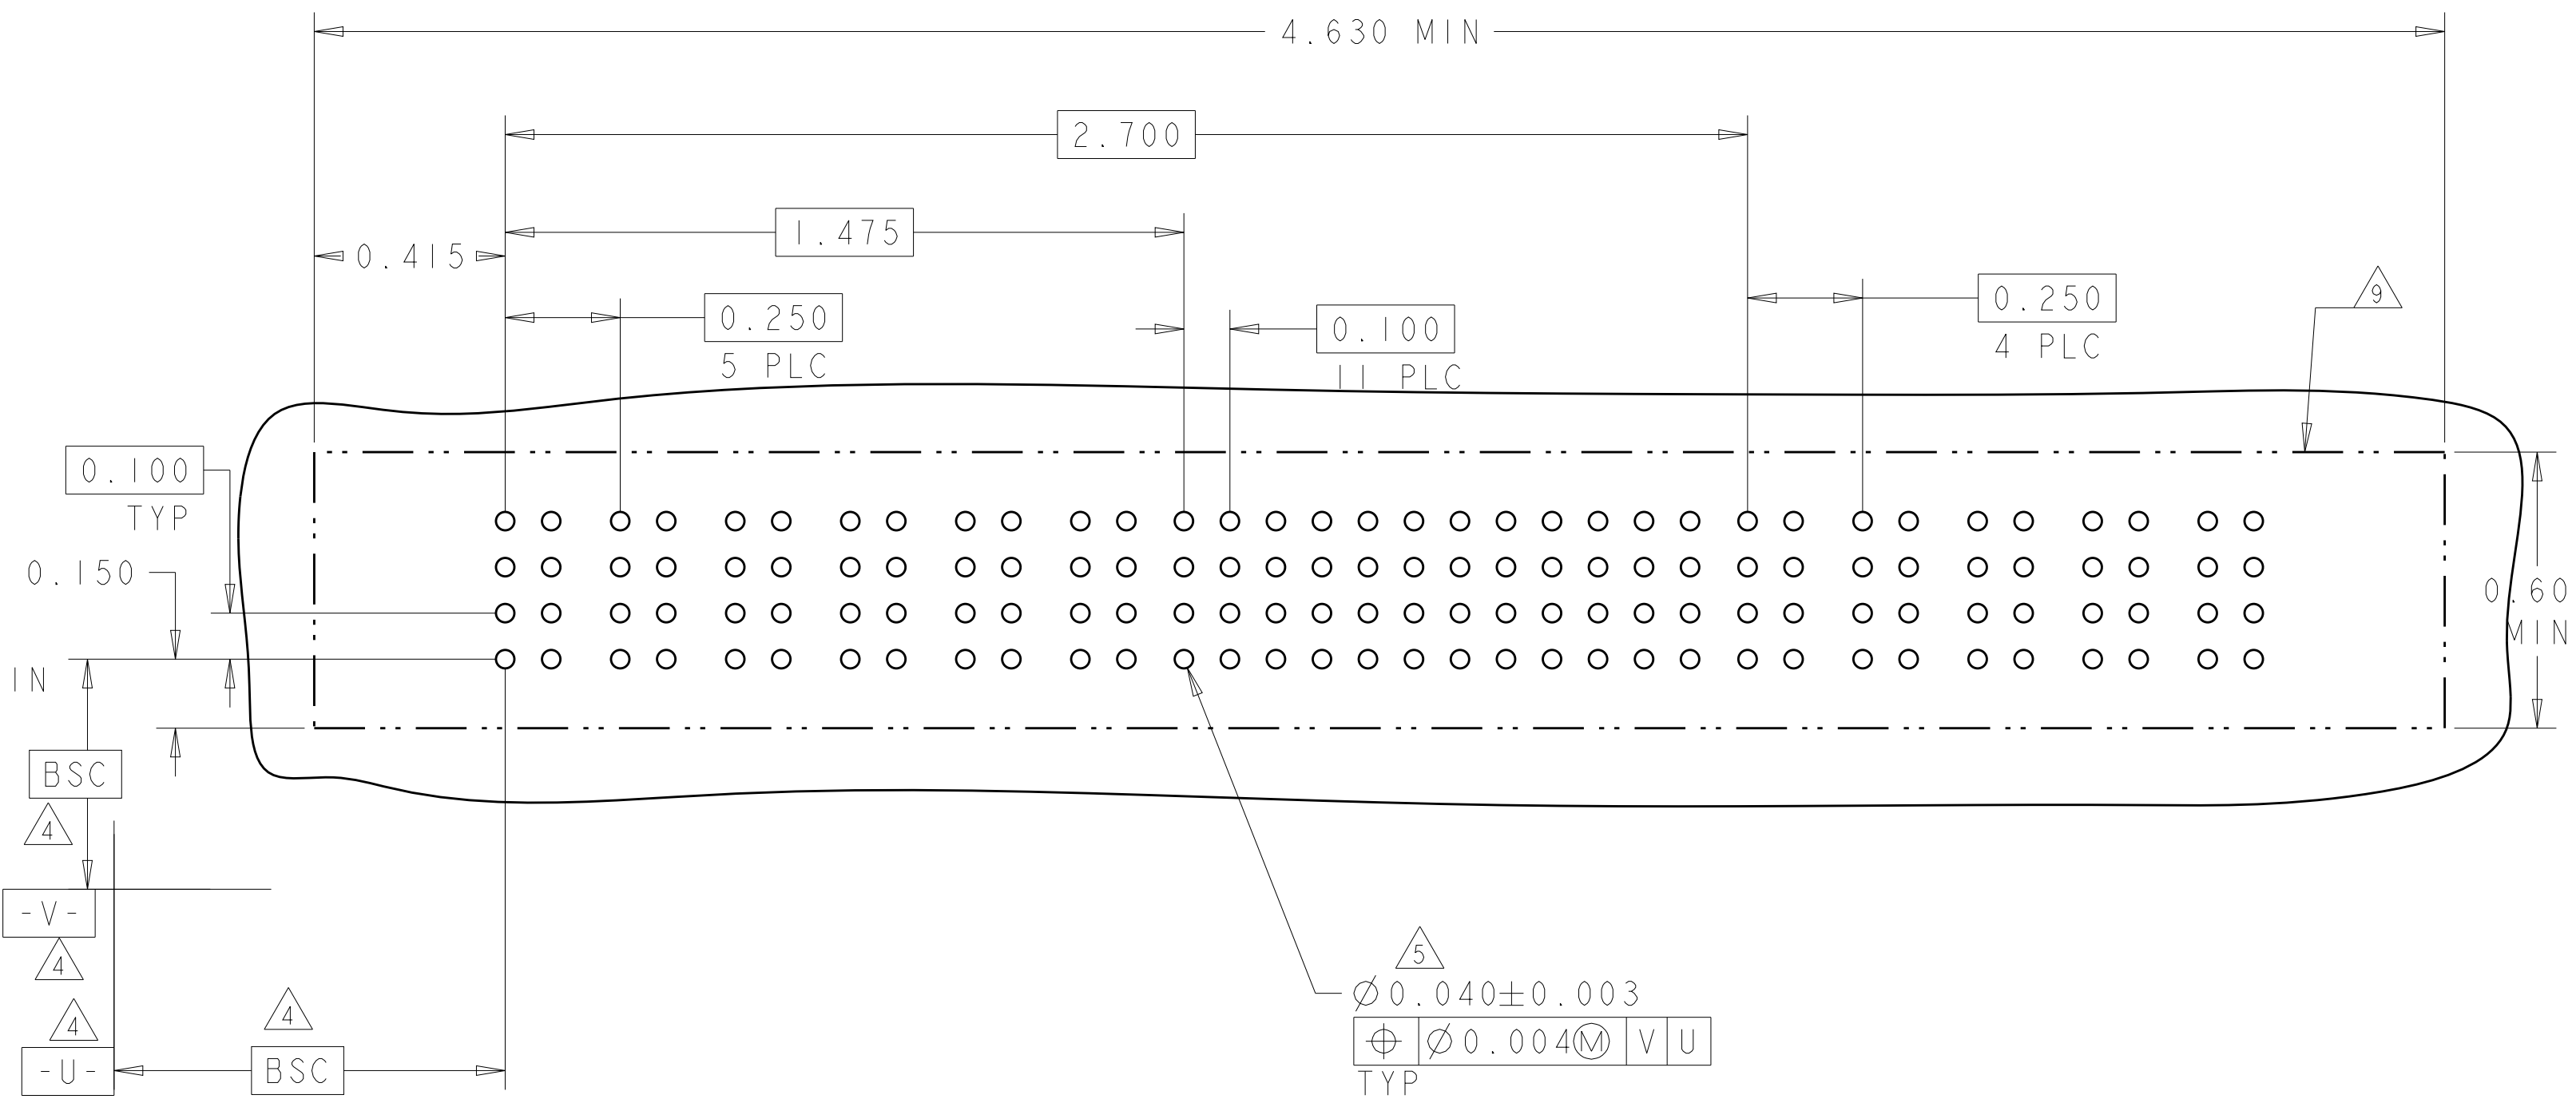4805 (3/11)

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER		SIGNAL												POWER			
			P1	P2	1	2	3	4	5	6	7	8	9	10	11	12	P3	P4		
5-6600333-2	D		VM	VM	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	VM	VM			
	C				EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV					
	B				EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV					
	A				ES	ES	ES	ES	ES	ES	EV	EV	EV	EV	EV				EV	
2P+48S+2P																				

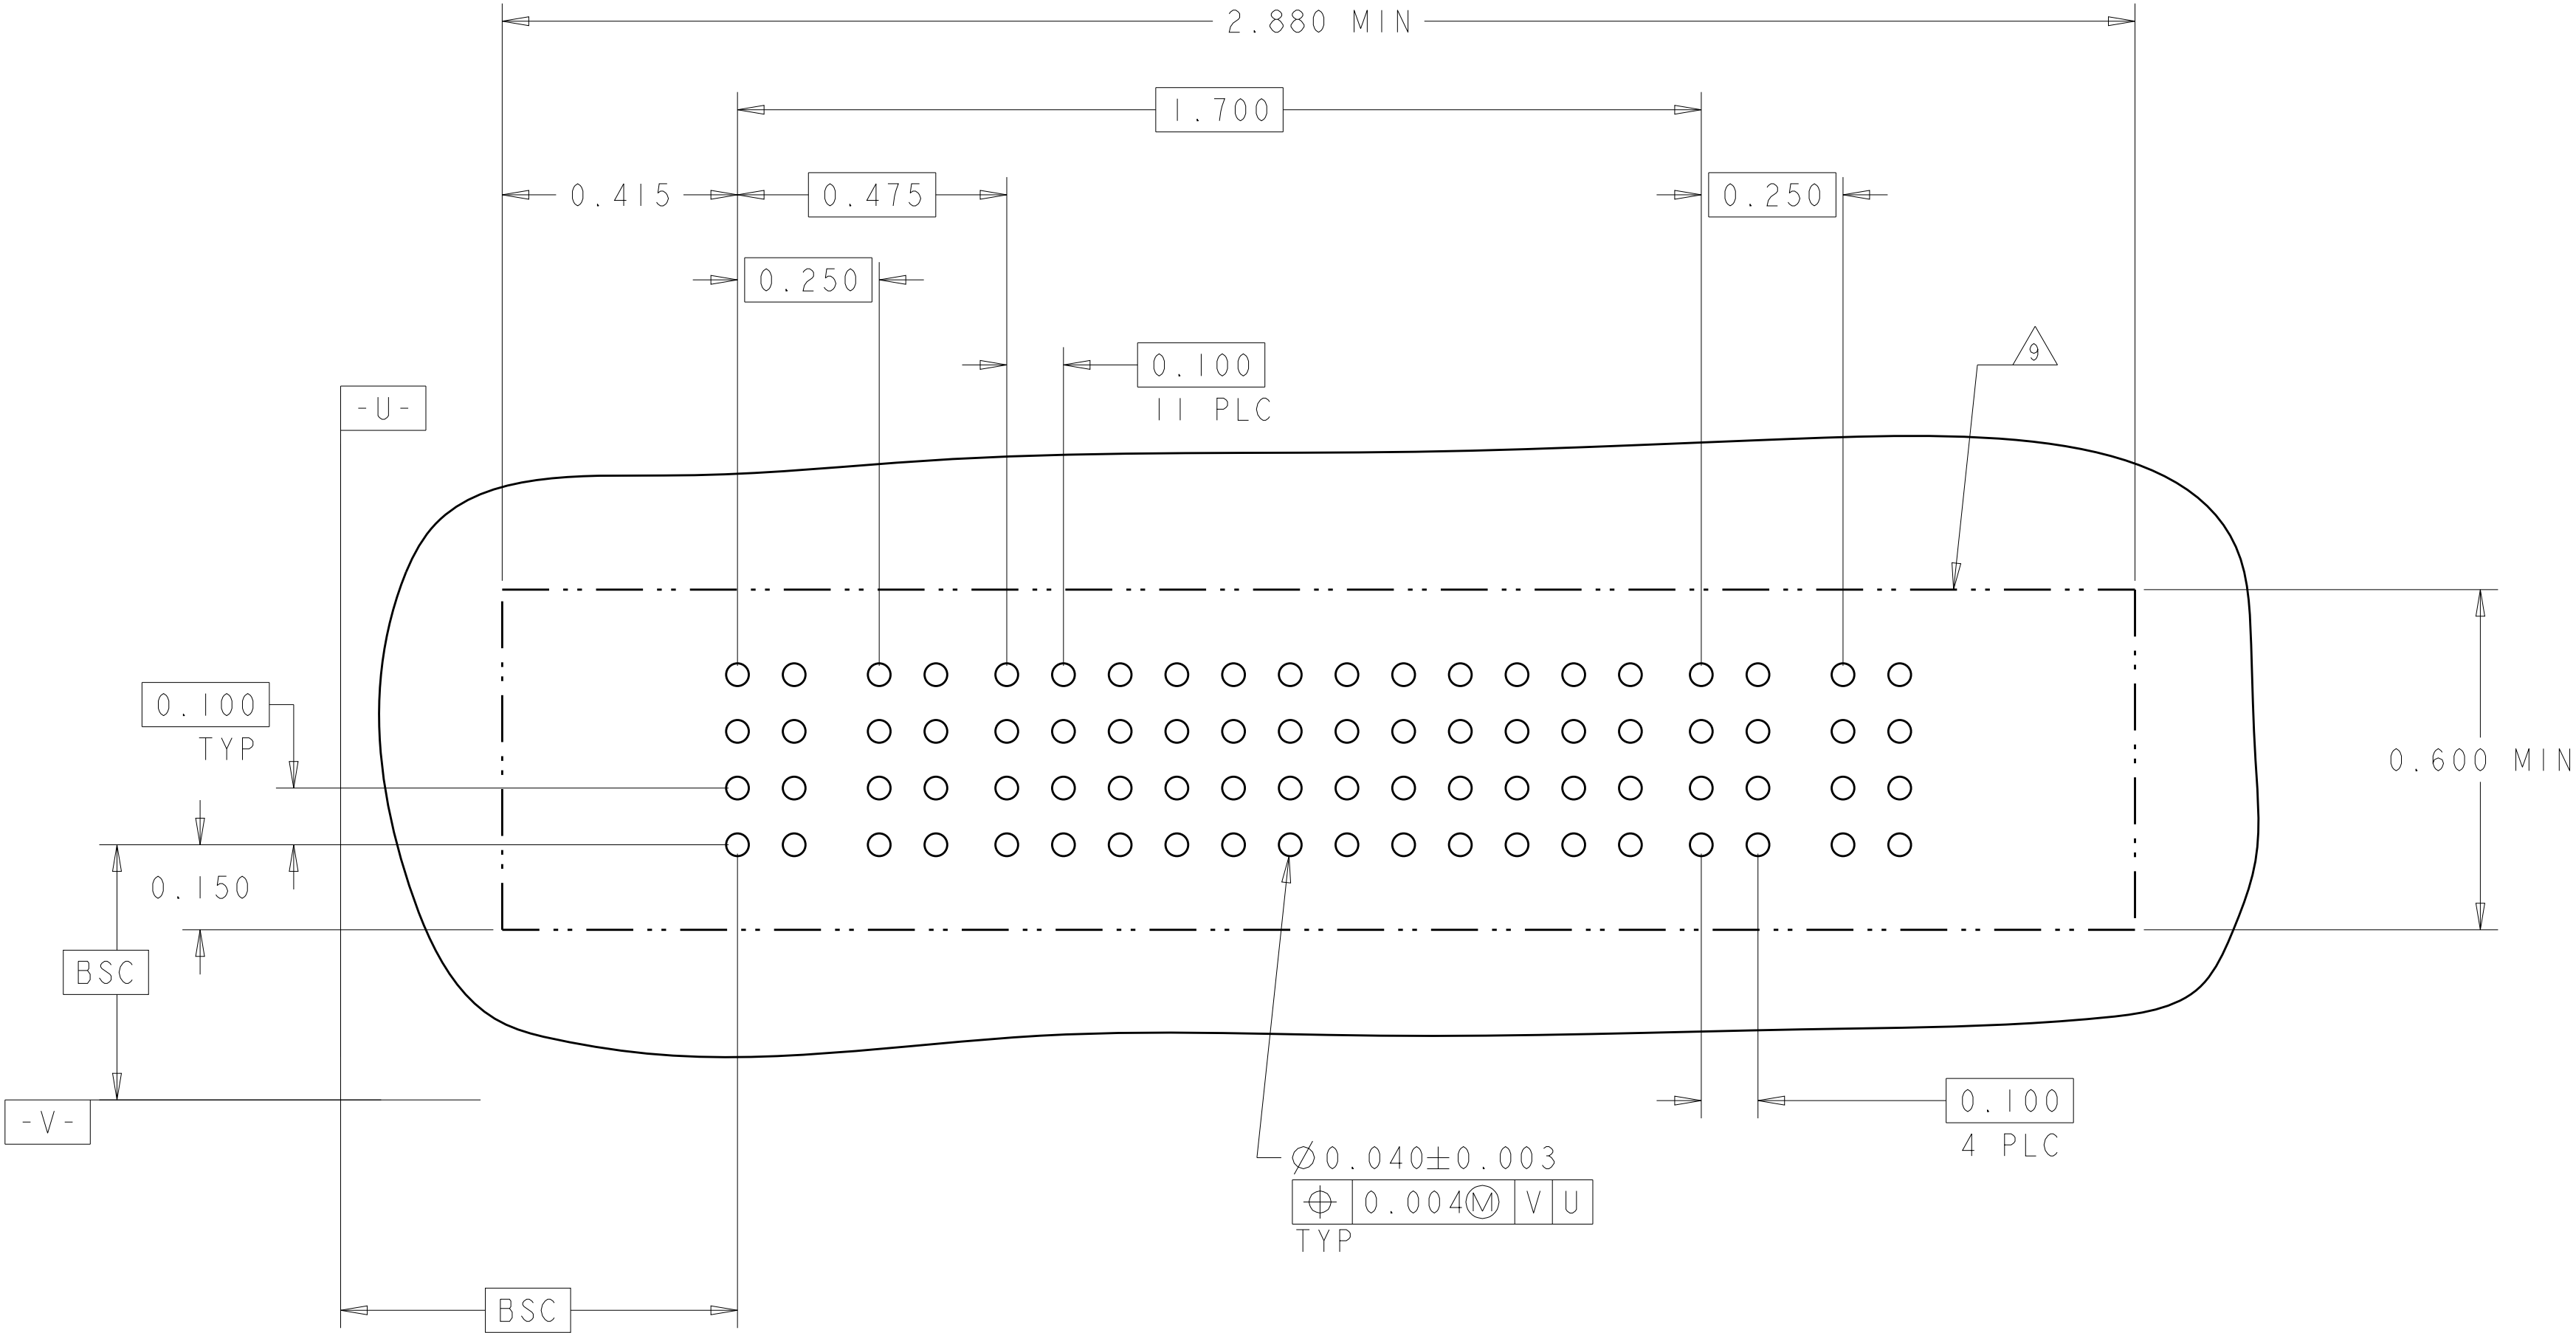

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
J. McCLINTON
23MAR2005

CHK
D. TROUT
23MAR2005

APVD
R. WHYNE
23MAR2005

DIMENSIONS:
INCH

0 PLC ±"
1 PLC ±"
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±2°
FINISH

TOLERANCES UNLESS OTHERWISE SPECIFIED:

108-1973
APPLICATION SPEC
114-13038

WEIGHT
-

Customer Drawing

NAME
VERTICAL HEADER ASSEMBLY, W/GUIDES, PRESS FIT, TYPE PSP MULTI-BEAM XL

SIZE
A1

CAGE CODE
00779

DRAWING NO.
6600333

RESTRICTED TO
-

SCALE
3:1

SHEET
22

OF
22

REV
P7

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-6600333-7](#)