



LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
CM	00		A1	REVISED PER ECO-11-004917	11MAR11	RK	HMR

D


C

B


A

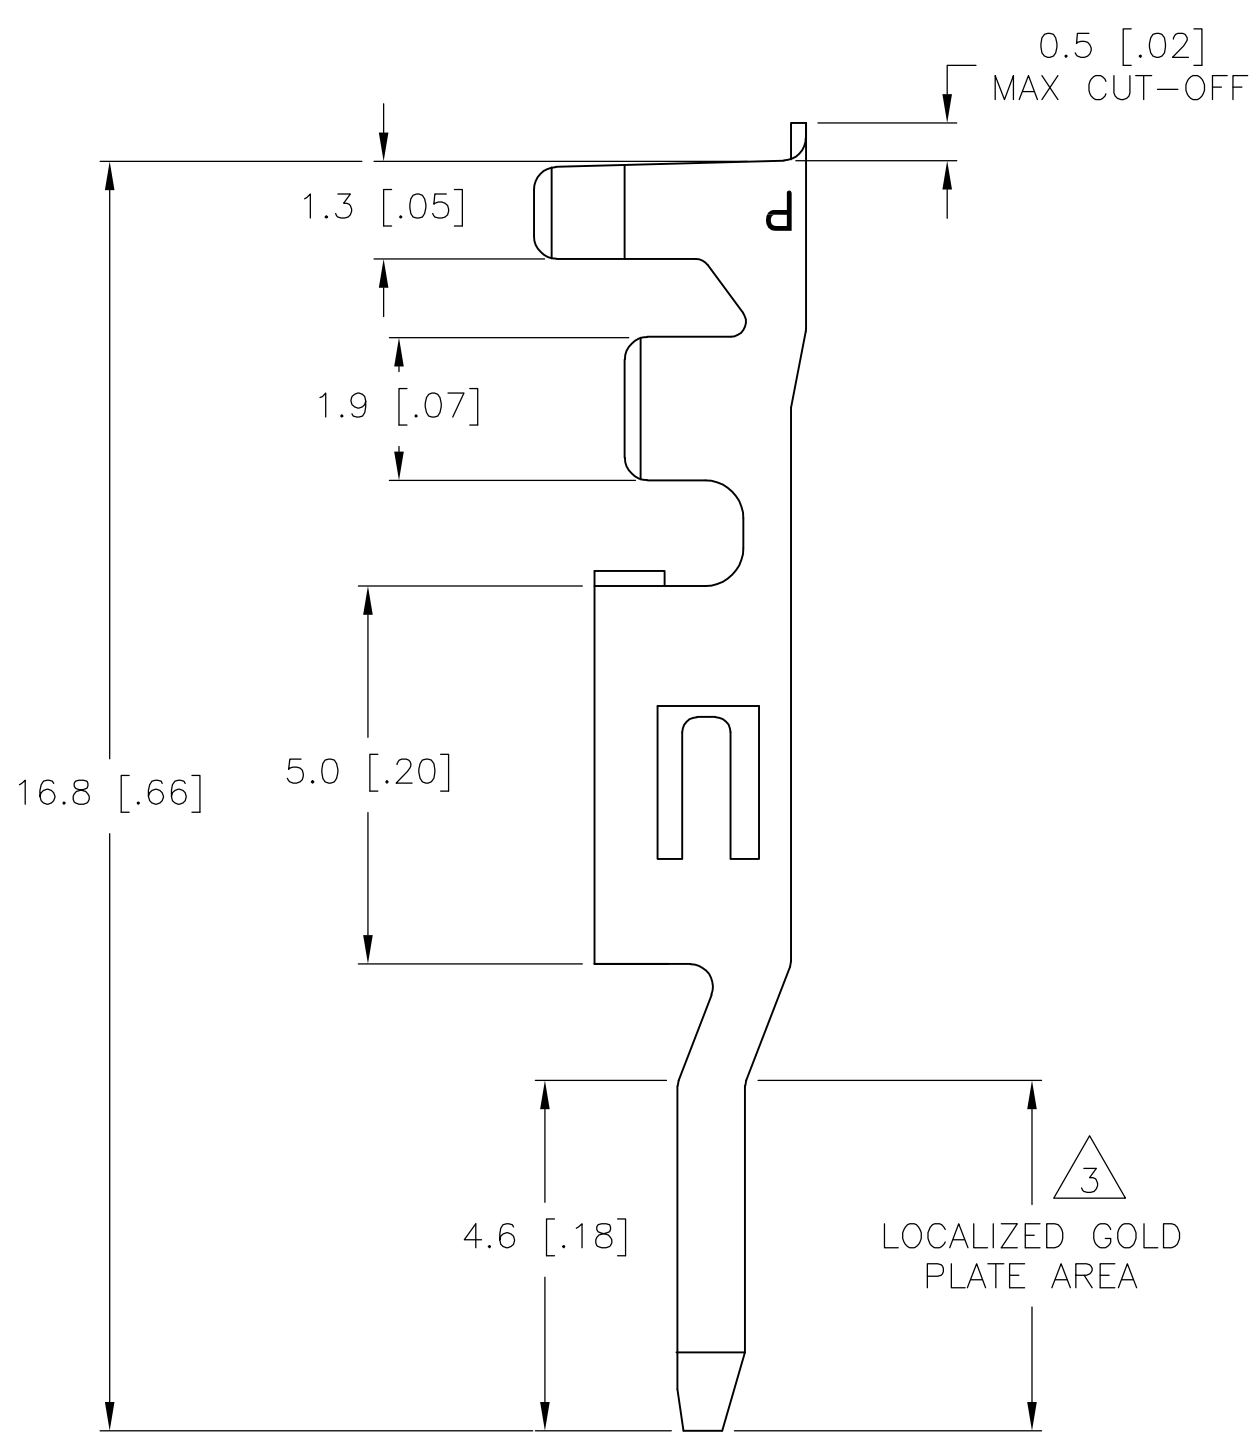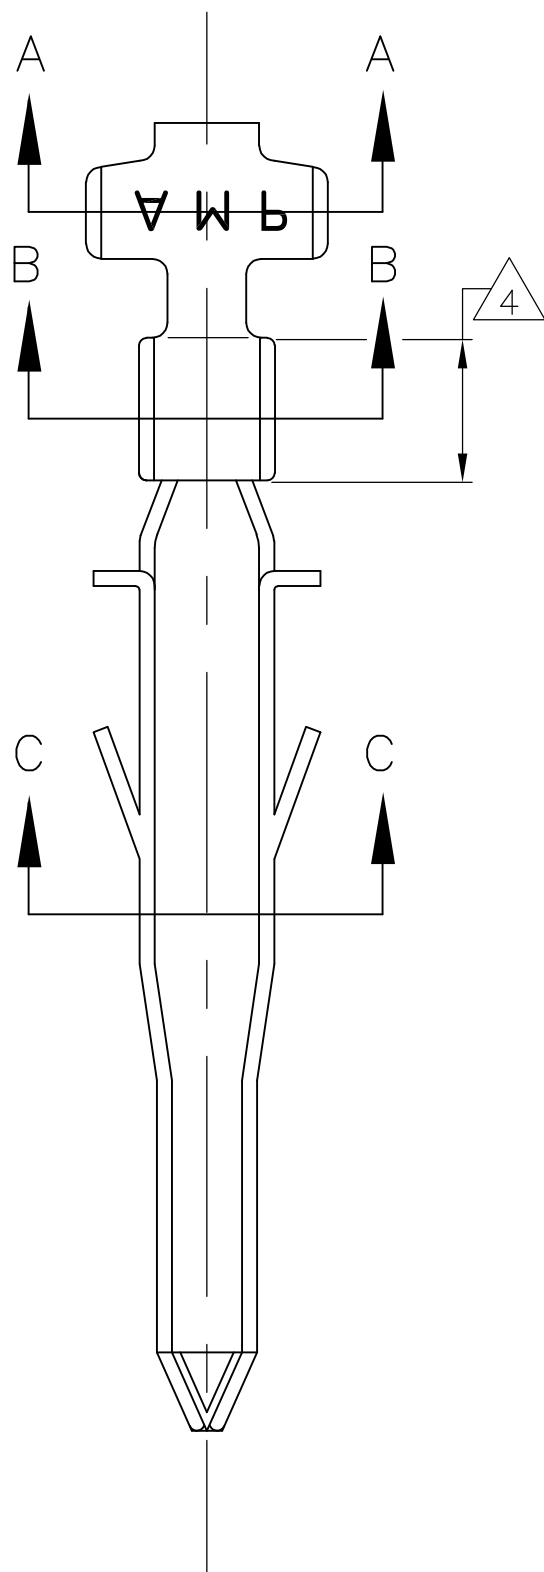


- 1 WIRE RANGE: 0.13–0.32mm² (26–22 AWG).
- 2 INSULATION RANGE: 1.20–1.75 DIA.
- 3 FINISH: 0.76μm MINIMUM GOLD IN LOCALIZED GOLD PLATE AREA OVER 1.27μm MINIMUM NICKEL
- 4 FINISH: 2.54μm MINIMUM TIN IN LOCALIZED TIN PLATE AREA.

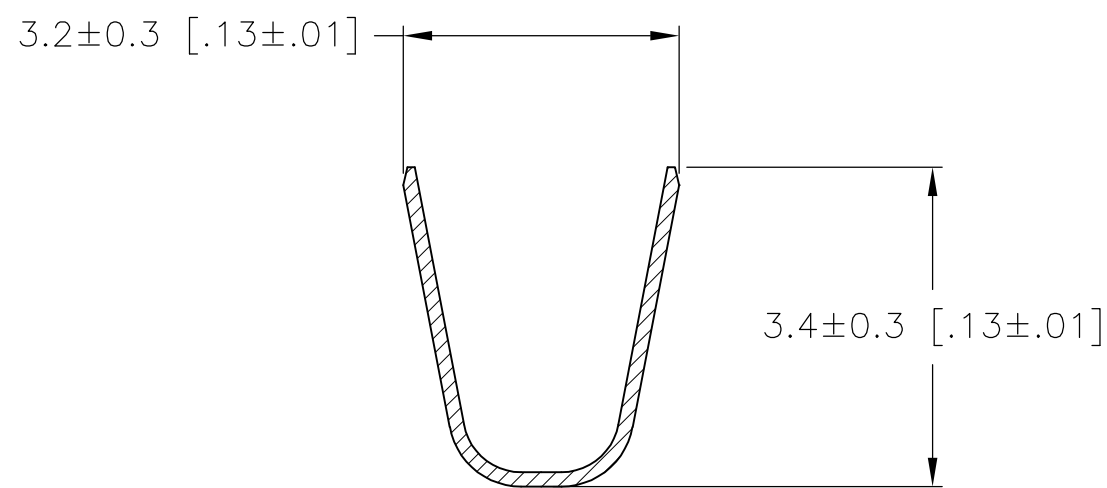

SECTION A-A

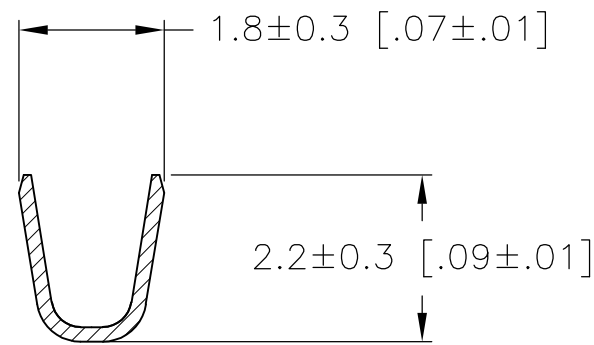

SECTION B-B

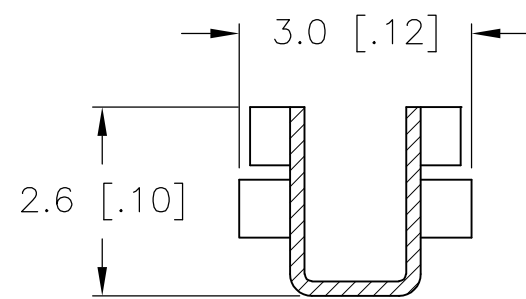

SECTION C-C

	PHOS. BRZ.	1586316-4
PRE-TIN	PHOS. BRZ.	1586316-3
	BRASS	1586316-2
PRE-TIN	BRASS	1586316-1
FINISH:	MATERIAL:	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. HOOVER 14-OCT-2003	 TE Connectivity					
		CHK D. COLEY 14-OCT-2003						
DIMENSIONS: mm [INCHES]		APVD D. COLEY 14-OCT-2003	NAME TERMINAL LOOSE PIECE, PIN VAL-U-LOK(TM)					
		PRODUCT SPEC						
		APPLICATION SPEC						
MATERIAL	FINISH	WEIGHT	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO		
			A2	00779	 -1586316	—		
CUSTOMER DRAWING			SCALE	10:1	SHEET	1 OF 1	REV	A1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1586316-3](#)