

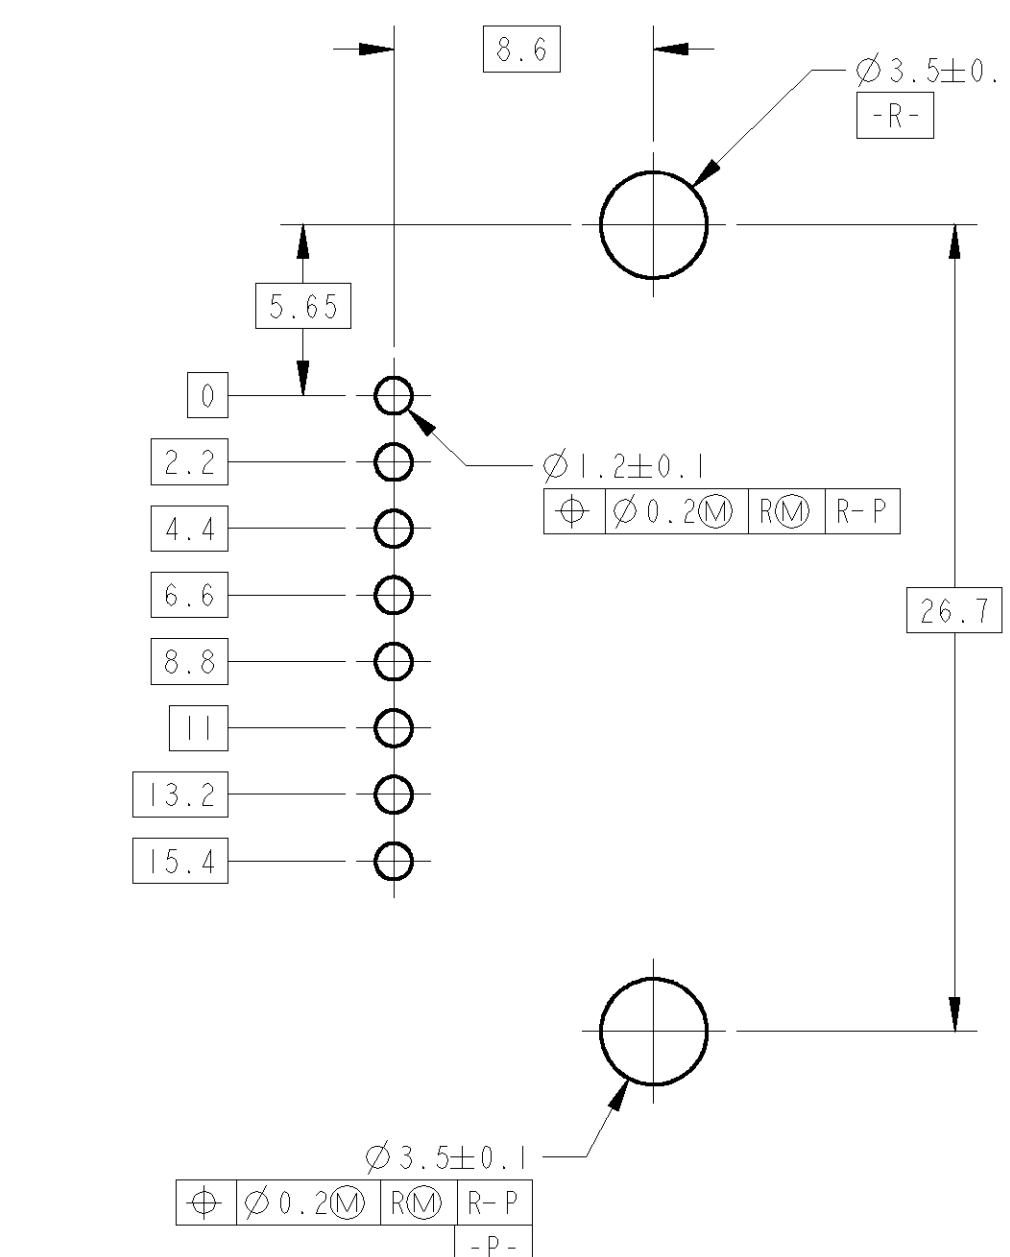
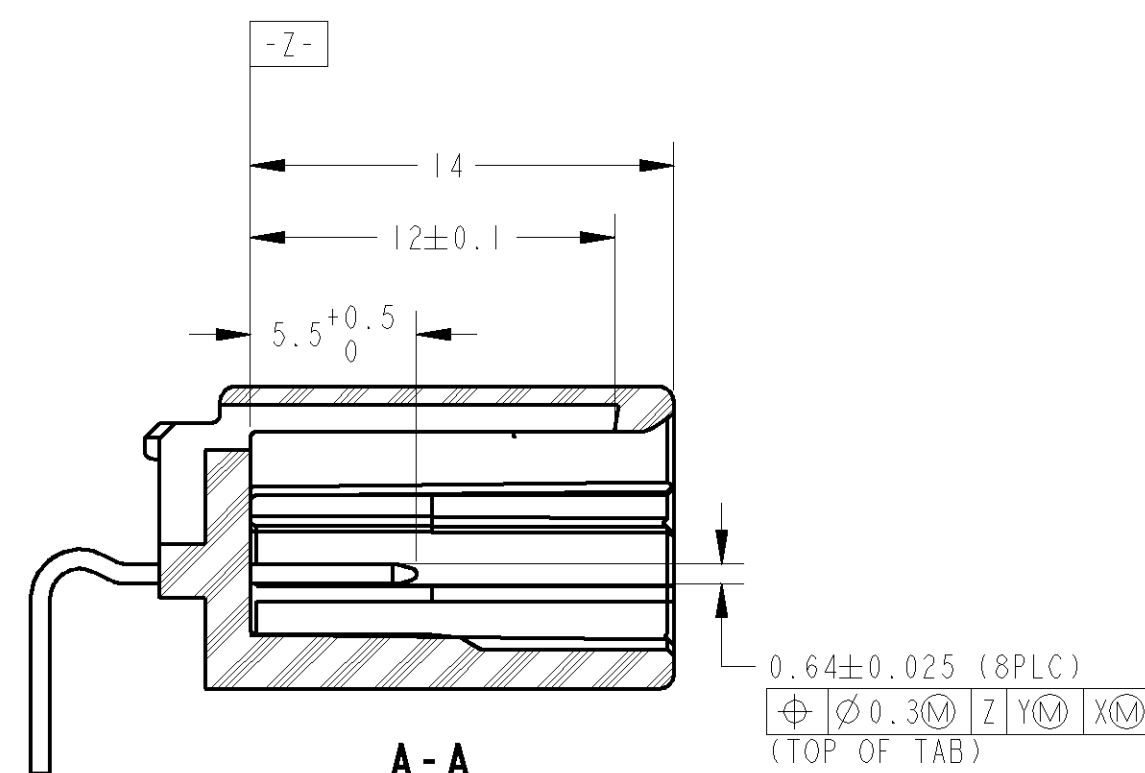
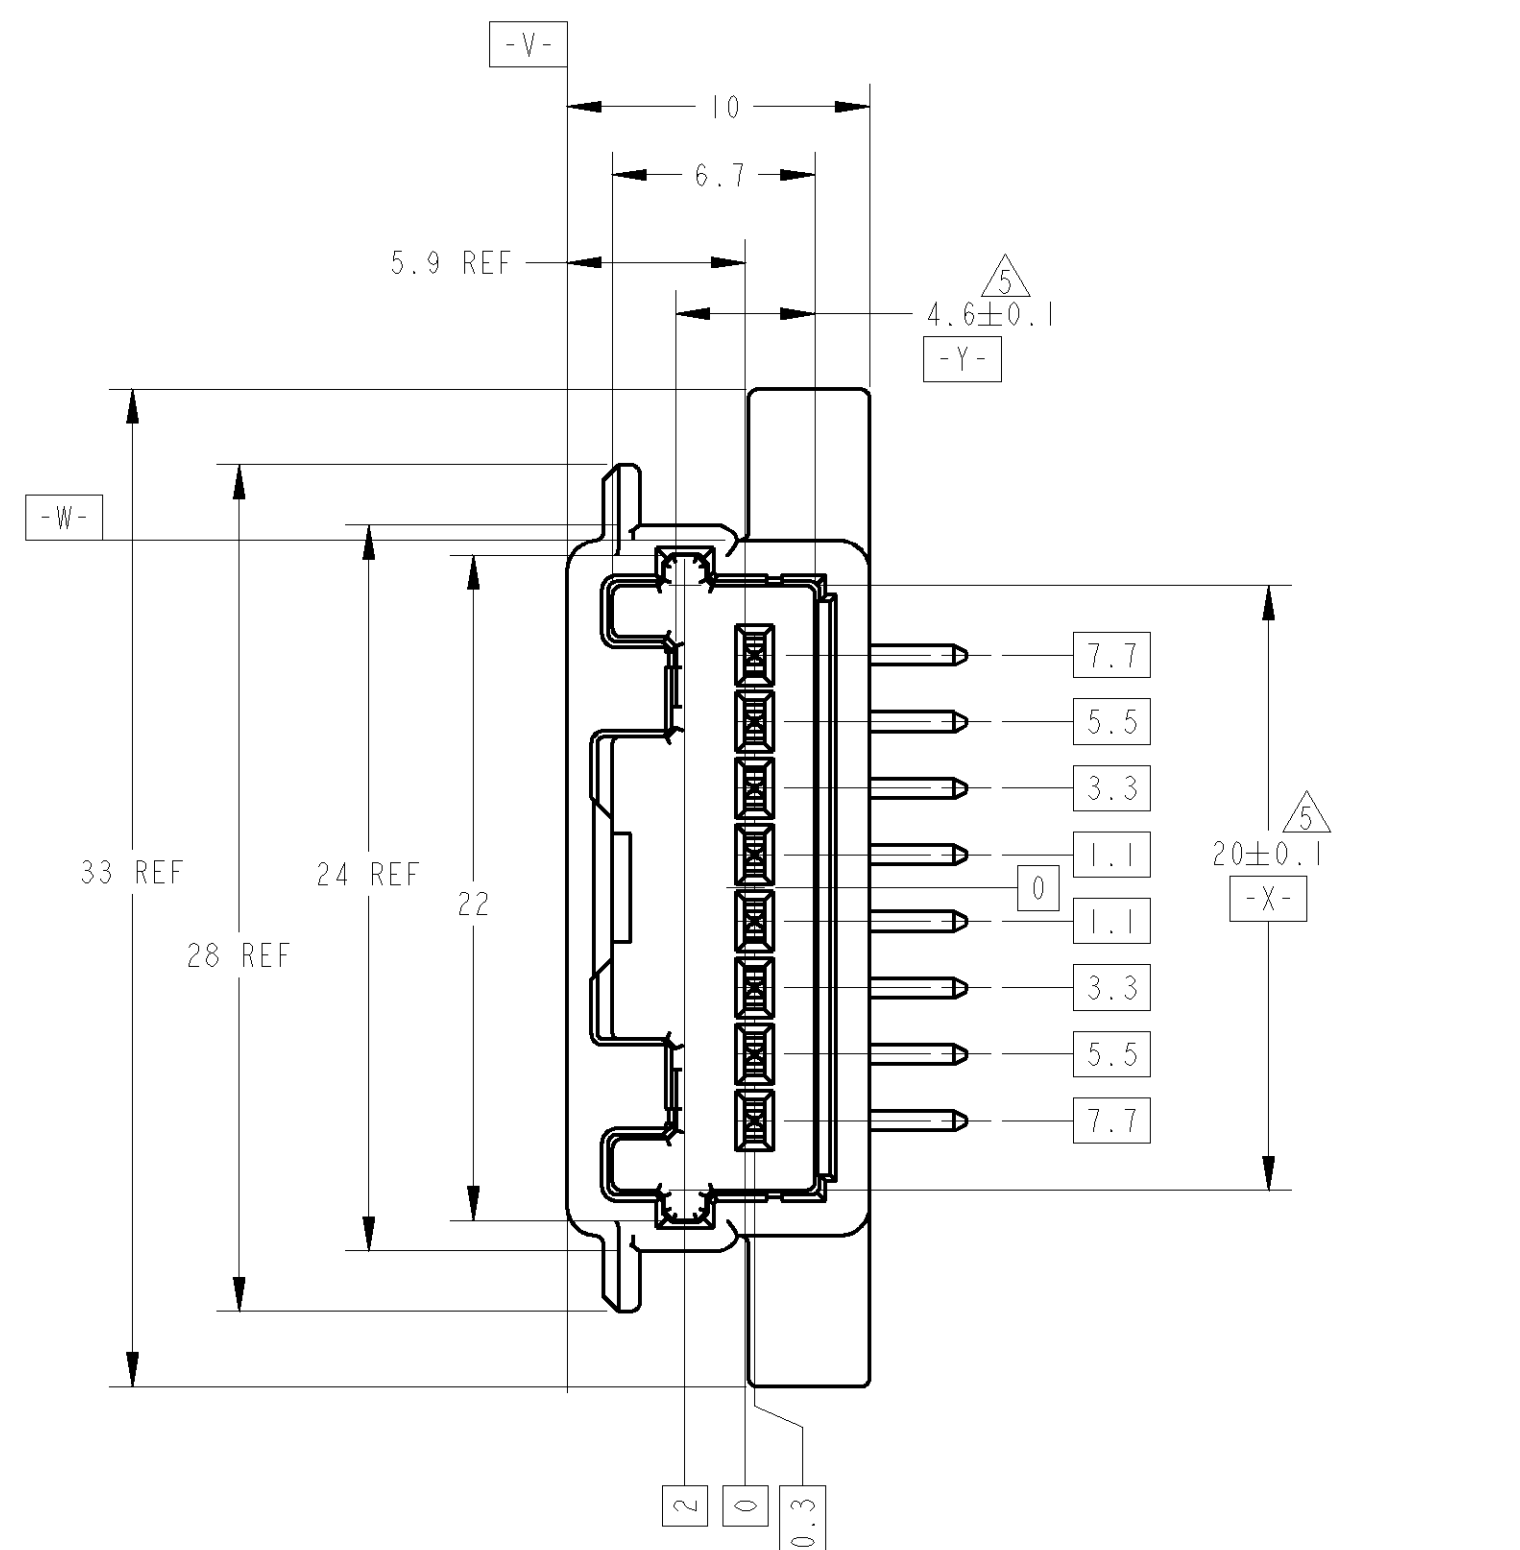
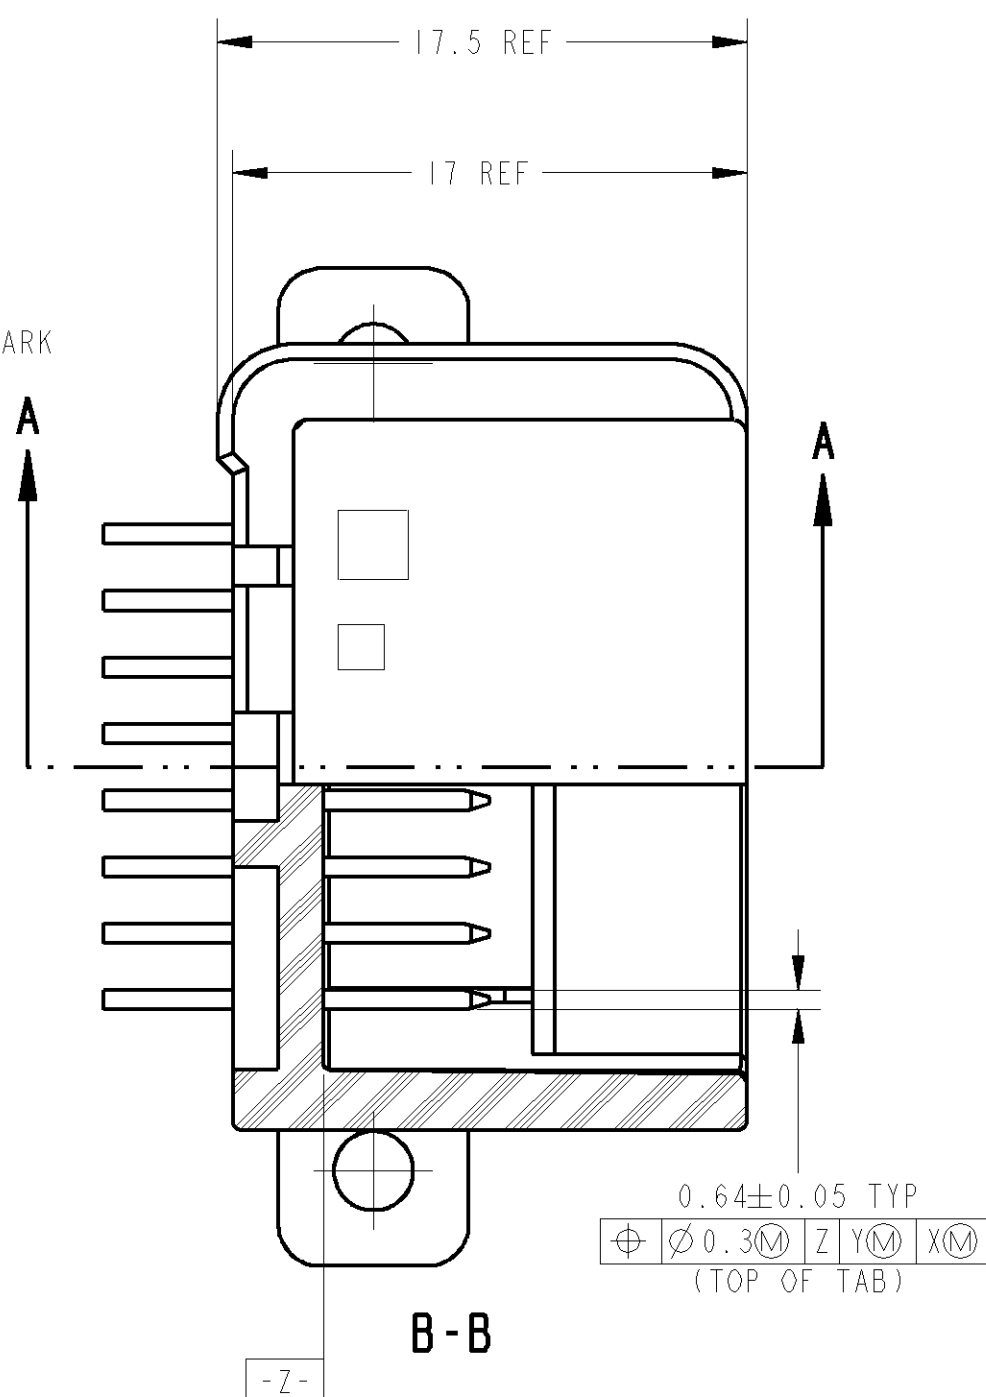
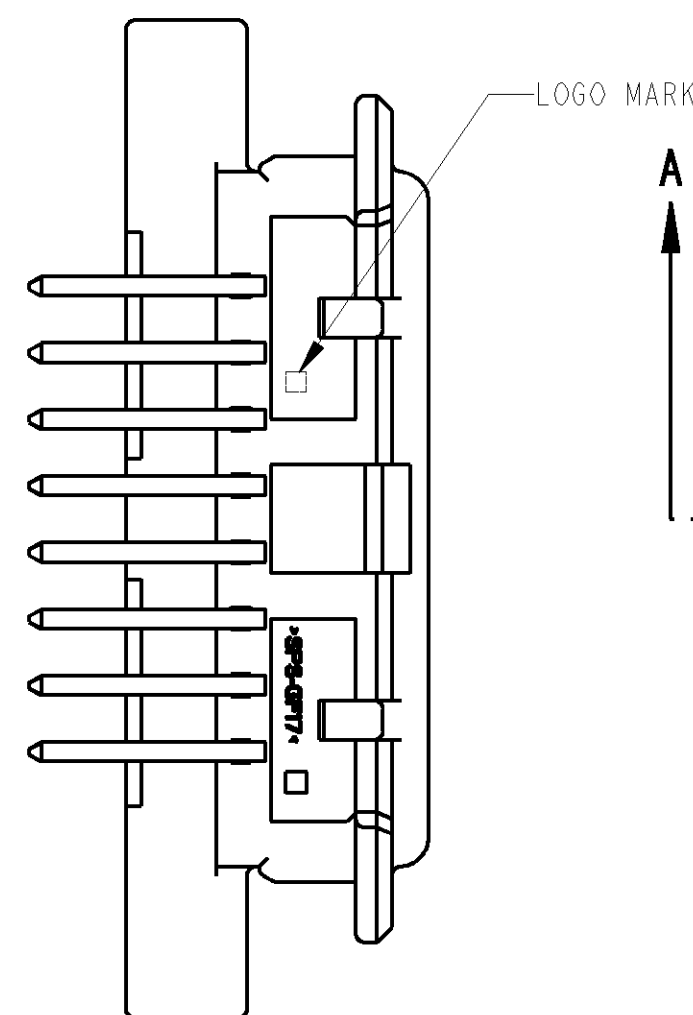
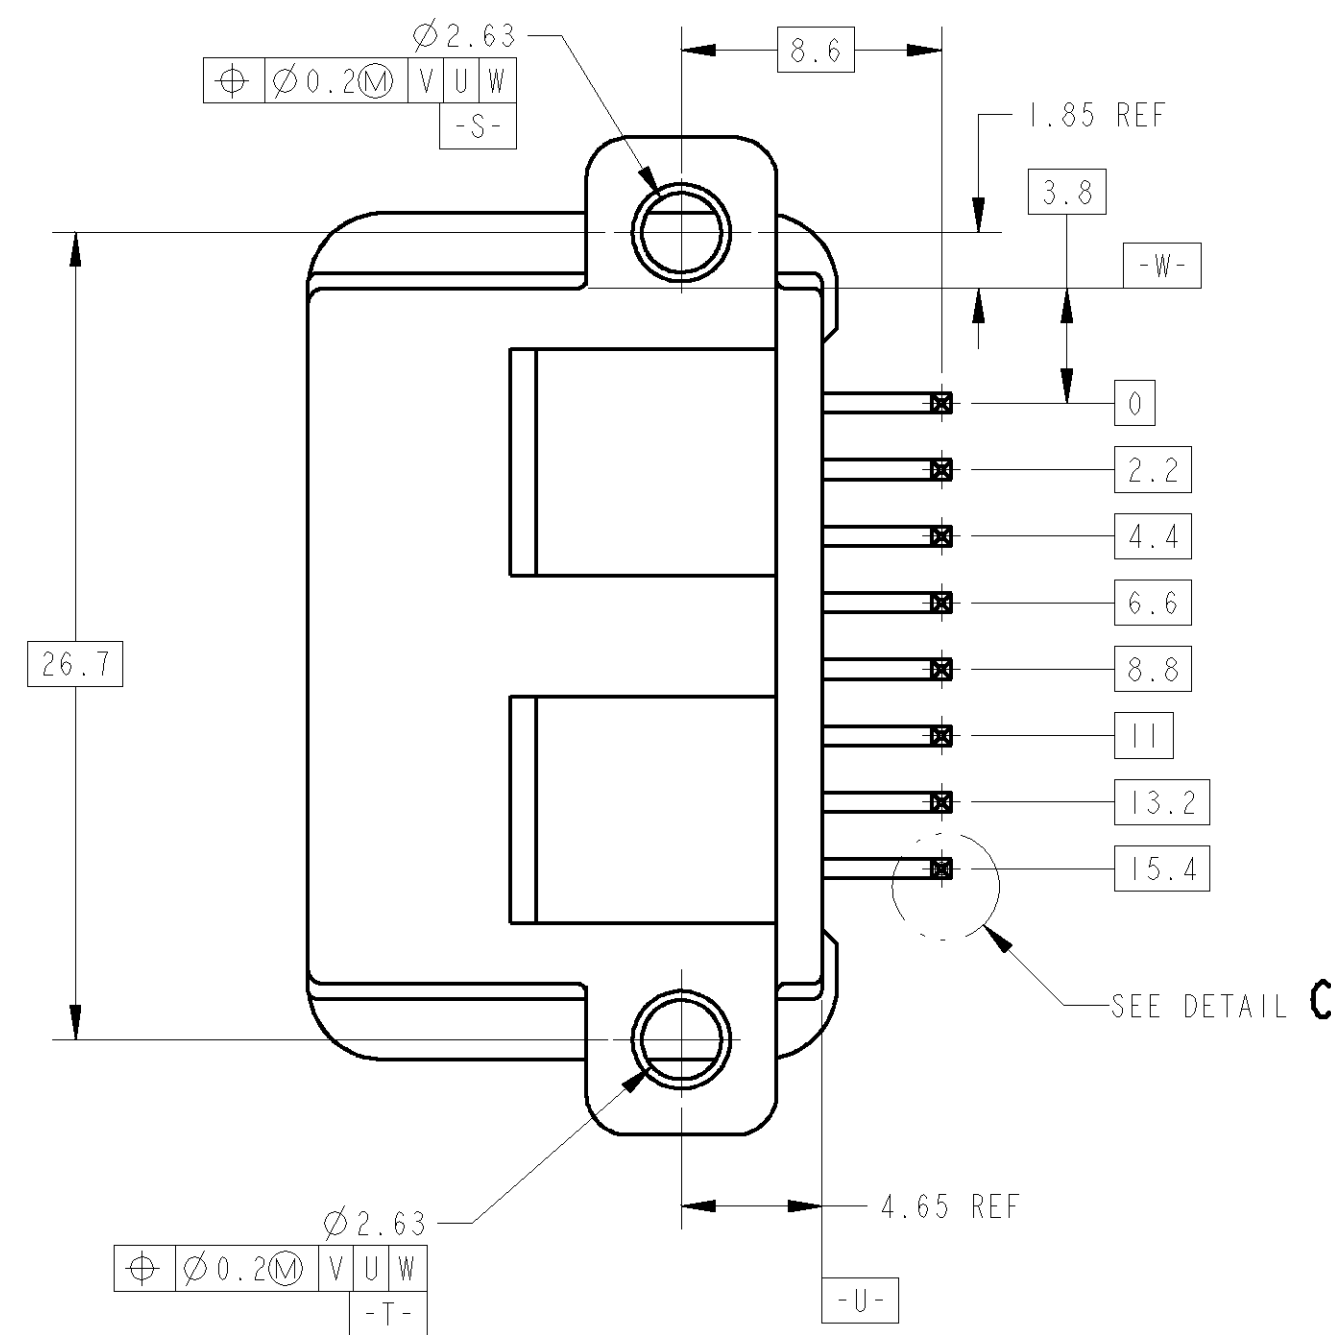
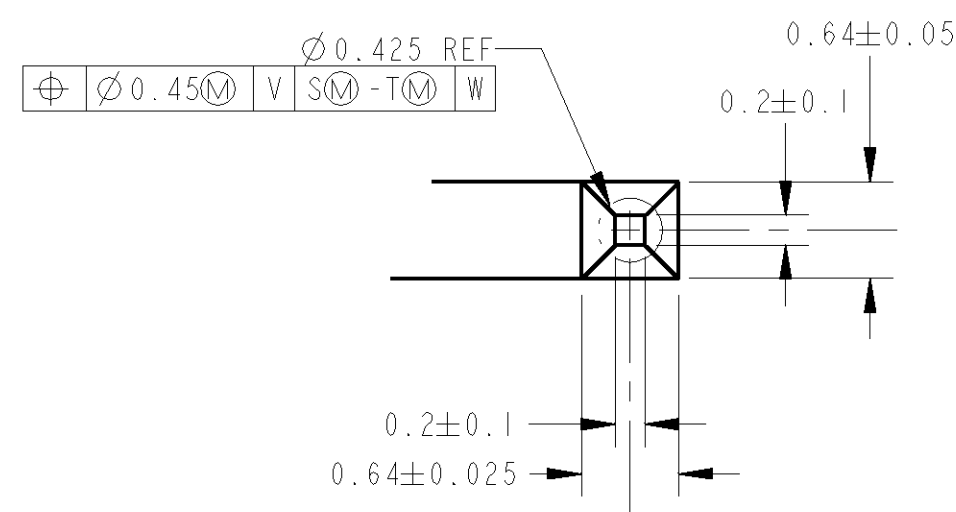


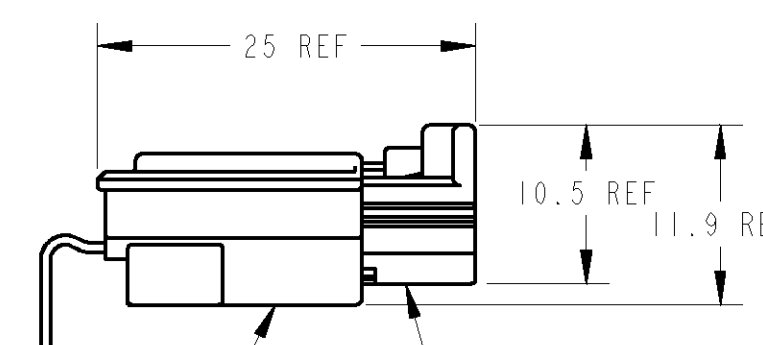

プリント基板取付寸法（コネクタ搭載側）
DIMENSION FOR PCB (CONNECTOR MOUNTING SIDE)

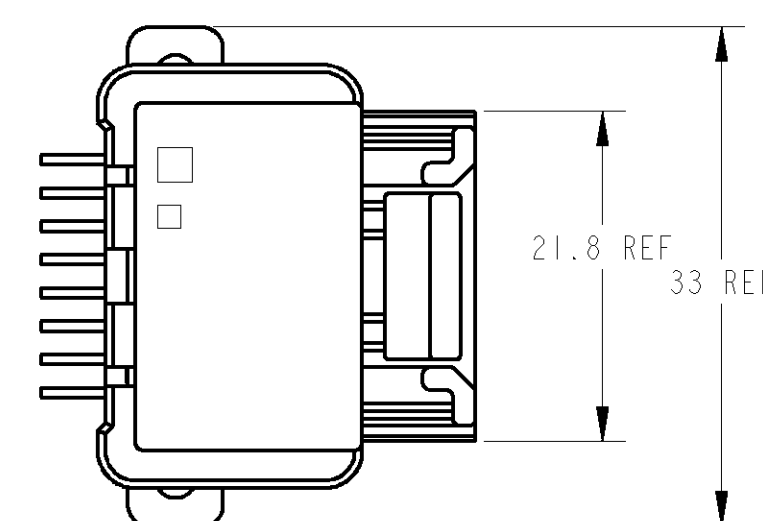

SCALE 2:1
CAP HOUSING ASSEMBLY & PLUG HOUSING ASSEMBLY ENGAGEMENT VIEW
キャップハウジングアセンブリとプラグハウジングアセンブリ嵌合図

- ① 1. 板合手コネクタ品番: TABLE-1参照
2. 適用ブリット基板: 板厚はTABLE-2参照
3. 適用ねじ: JIS B1115, B1122タッピングねじ、ねぐ2種、呼び径3mm
長さはTABLE-2参照
ねじ締付トルク管理値(参考値) $0.4 \pm 0.05 \text{ N} \cdot \text{m}$
但し、AMP評価用のねじと基板の組み合わせは該当である。
よって、管理値は別途決定する。
② 4. 本製品の取扱いについては、取扱説明書411-78080に準ずるとして、
「 $-Z-$ 」より6mmの位置で規定

1. MATING CONNECTOR PART No. : SEE TABLE-1
2. APPLICABLE PRINTED CIRCUIT BOARD : SEE TABLE-2 FOR THICKNESS
3. APPLICABLE SCREW : PAN-HEADED,
TYPE 2 TAPPING SCREW OF NOMINAL DIAMETER 3mm REFER TO JIS B1115, B1122
LENGTH: SEE TABLE-2
FASTENING TORQUE (FOR REFERENCE): 0.392N·m MAX
BUT, THIS IS VALUE FOR COMBINATION OF TAPPING SCREW FOR TESTING
AND PCB FOR TESTING.
SO, TORQUE FOR OPERATION SHOULD BE PROVIDED RESPECTIVELY
④ 4. AS FOR THE HANDLING OF THIS PRODUCT,
FOLLOW THE INSTRUCTION SHEET NO. 411-78080.
△. MEASURED AT 6mm FROM -Z-

POS 極数	FEMALE HSG	メスハウジング
	TYCO PART NUMBER	
8	1376368	
	1746875	

プリント基板板厚 (mm) THICKNESS OF PCB (mm)	0.5~1.2	1.6~2.0
固定用ねじ首下長さ (mm) NOMINAL LENGTH OF SCREW (mm)	5	6

PAPER BOX	PLASTIC TUBE	SELECTIVE-TIN (MATTE)	SELECTIVE-TIN (BRIGHT)	SPS GF17	NATURAL	1747285-2
PLASTIC BOX	PLASTIC TUBE	SELECTIVE-TIN (MATTE)	SELECTIVE-TIN (BRIGHT)	SPS GF17	NATURAL	1747285-
OUTER 外基	INNER 内基	SOLDERING SIDE 半田付け部	CONTACT SIDE 接点部	MATERIAL 材料	COLOR 色	PART NUMBER 品番
PACKING STYLE 梱包形態			CONTACT FINISH コンタクト仕上	HOUSING ハウジング		

*10. IF SEALING, THE SEALING CONDITION FOR YOUR ELECTRICAL CONNECTION MUST BE SPECIFIED IN THE ORDER. IF THERE IS NO SEALING, IT SHOULD BE CONFIRMED FOR THE LATEST REVISION.

DIMENSIONS:
寸法 (mm)

TOLERANCES UNLESS OTHERWISE SPECIFIED:
公差 (mm) 標準公差 ± 0.3

- ± P.L.C. ± 0.5
- ± P.L.C. ± 0.13
- ± P.L.C. ± 0.13
- ± P.L.C. ± 0.001

FILM SIZE SEE TABLE

DWN H. MITO 260CT04

CHN H. YAMAGAMI 260CT04

APVD J. ISOHATA 260CT04

PRODUCT SPEC 108-5664

APPLICATION SPEC 対応規格書

WGT 114-5250-.5329

REIGHT 2.78 g

CUSTOMER DRAWING

Tyco Electronics Tyco Electronics Corporation
Kawasaki, Japan

0.64 SERIES I/O CONN.
8 POSITION CAP HOUSING ASSY IROW

SIZE CAGE CODE DRAWING NO
A | 00779 C=1747285

FOLE 2.1 SHEET 1 OF REV

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1747285-2](#)