




preci-dip

# DIL SOCKETS

**SERIES**  
**117**

**117-PP-XXX-41-005101**  
1.778 mm, Solder tail

High density DIL sockets for devices featuring 0.07" (1.778 mm) lead spacing.

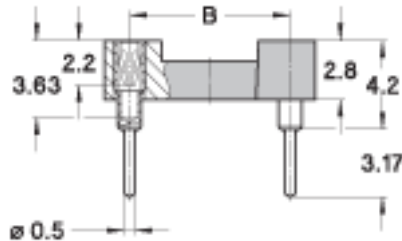

## TECHNICAL SPECS.:

|  |   |
|--|---|
| <b>Insulator</b>                             | Black glass filled polyester PCT-GF30-FR              |
| <b>Flammability</b>                          | UL 94V-O  |
| <b>Sleeve</b>                                | Brass CuZn36Pb3 (C36000)                              |
| <b>Contact</b>                               | Clip (4 finger): Beryllium copper (C17200)            |
| <b>Accepted pin <math>\varnothing</math></b> | 0.40 to 0.56 mm                                       |
| <b>Insertion Forces</b>                      | 2 N typ.  |
| <b>Withdrawal Forces</b>                     | 1 N typ. (polished steel gauge $\varnothing$ 0.43 mm) |
| <b>Mechanical life</b>                       | Min. 100 cycles                                       |
| <b>Rated current</b>                         | 1A  |
| <b>Contact resistance</b>                    | Max. 10 m   |
| <b>Dielectric strength</b>                   | Min. 1000 V RMS                                       |

## ORDERING INFORMATION:

|                 |        |                   |
|-----------------|--------|-------------------|
| PP Plating code | Sleeve | Clip              |
| 87              | Tin    | Gold flash        |
| 83              | Tin    | Gold 0.75 $\mu$ m |

## ADVANCED INFORMATION:

| Order Codes          | Poles | A    | B     | C    | D | E | See |
|----------------------|-------|------|-------|------|---|---|-----|
| 117-PP-316-41-005101 | 16    | 14.6 | 7.62  | 10.1 |   |   |     |
| 117-PP-428-41-005101 | 28    | 25.2 | 10.16 | 12.7 |   |   |     |

|                      |     |      |       |       |
|----------------------|-----|------|-------|-------|
| 117-PP-430-41-005101 | 30  | 27.0 | 10.16 | 12.7  |
| 117-PP-432-41-005101 | 32  | 28.8 | 10.16 | 12.7  |
| 117-PP-448-41-005101 | 48  | 43.1 | 10.16 | 12.7  |
| 117-PP-620-41-005101 | 20  | 18.1 | 15.24 | 17.64 |
| 117-PP-624-41-005101 | 24  | 21.7 | 15.24 | 17.64 |
| 117-PP-628-41-005101 | 28  | 25.2 | 15.24 | 17.64 |
| 117-PP-640-41-005101 | 40  | 35.8 | 15.24 | 17.64 |
| 117-PP-642-41-005101 | 42  | 37.7 | 15.24 | 17.64 |
| 117-PP-648-41-005101 | 48  | 43.1 | 15.24 | 17.64 |
| 117-PP-652-41-005101 | 52  | 46.7 | 15.24 | 17.64 |
| 117-PP-656-41-005101 | 56  | 50.2 | 15.24 | 17.64 |
| 117-PP-664-41-005101 | 64  | 57.3 | 15.24 | 17.64 |
| 117-PP-668-41-005101 | 68  | 60.9 | 15.24 | 17.64 |
| 117-PP-764-41-005101 | 64* | 57.3 | 19.05 | 21.5  |

# TECHNICAL ASSISTANCE

## GENERAL SPECIFICATIONS:

The values listed below are general specs applying for PRECI-DIP DIL sockets. Please see individual catalog page for additional and product specific technical data.

|                             |                  |
|-----------------------------|------------------|
| Operating temperature range | -55 ... +125 °C  |
| Climatic category (IEC)     | 55/125/21        |
| Operating humidity range    | annual mean 75 % |
| Max working voltage         | 100 VRMS/150 VDC |

PRECI-DIP sockets are recognized by Underwriters Laboratories Inc. and listed under "Connectors for Use in Data, Signal, Control and Power Applications", File Nr. E174442.

## MECHANICAL CHARACTERISTICS:

|                                   |   |
|-----------------------------------|---|
| Clip retention                    | Min. 40 N (no displacement under axial force applied) |
| Contact (sleeve / clip) retention | Min. 3.3 N acc. to MIL-DTL-83734, pt 4.6.4.2          |

## ELECTRICAL CHARACTERISTICS:

|  |  |
|--|--|
| Insulation resistance between any two adjacent contacts      | Min. 10'000 M at 500 V AC                        |
| Capacitance between any two adjacent contacts                | Max. 1 pF  |
| Air and creepage distances between any two adjacent contacts | Min. 0.6 mm (Min. 0.2 mm FOR SHRINK-DIP SOCKETS) |

## ENVIRONMENTAL CHARACTERISTICS:

The sockets withstand the following environmental tests without mechanical and electrical defects:

- Dry heat steady state IEC 60512-11-9.11i / 60068-2-2.Bb: 125 °C, 16h
- Damp heat cyclic IEC 60512-11-12.11m / 60068-2-30.Db: 25/55 °C, 90 – 100 %rH, 1 cycle of 24 h
- Cold steady state IEC 60512-11-10.11j / 60068-2-1.A: -55 °C, 2 h
- Thermal shock IEC 60512-11-4.11d / 60068-2-14.Na: -55/125 °C, 5 cycles 30 min
- Sinusoidal vibrations IEC 60512-6-4.6d / 60068-2-6.Fc: 10 to 500 Hz, 10 g, 1 octave/min, 10 cycles for each axis
- Shock IEC 60512-6-3.6c / 60068-2-27.Ea: 50 g, 11 ms, 3 shocks in three axis

During the above two tests no contact interruption >50 ns does appear.

- Solderability J-STD-002A, Test A, 245°C, 5 s solder alloy SnAg3.8Cu0.7
- Resistance to soldering heat J-STD-0020C, 260°C, 20 s
- Moisture sensitivity J-STD-020C level 1
- Resistance to corrosion :
  - 1) Salt spray test IEC 60068-2-11.Ka: 48 h
  - 2) Sulfur dioxide (SO<sub>2</sub>) test IEC 60068-2-42 Kc: 96 h at 25 ppm SO<sub>2</sub>, 25 °C, 75 %rH
  - 3) Hydrogen sulfide (H<sub>2</sub>S) test IEC 60068-2-43 Kd: 96 h at 12 ppm H<sub>2</sub>S, 25 °C, 75 %rH

## SOLDERLESS COMPLIANT PRESS-FIT CHARACTERISTICS:

### PRESS-FIT CHARACTERISTICS MEASURED ACC. TO IEC 60352-5

- Press-in force: 90 N max. (at min. hole dia.) / 65 N typ.
- Push-out force: 30 N min. (at max. hole dia.) / 50 N typ.
- Push-out 3rd cycle: 20 N min. (at max. hole dia.)

### PCB HOLE DIMENSIONS

- 2.54 mm grid: Finished hole Ø: 1 + 0.09/-0.06 mm | Drilled hole Ø: 1.15 ± 0.02 mm

## PCB HOLE PLATING

- PCB surface finish: Hole plating
- Tin: 5-15  $\mu\text{m}$  tin over min. 25  $\mu\text{m}$  copper
- Copper: min. 25  $\mu\text{m}$  copper
- Gold over nickel: 0.05-0.2  $\mu\text{m}$  gold over 2.5-5  $\mu\text{m}$  nickel over min. 25  $\mu\text{m}$  copper

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Preci-dip:

[117-83-432-41-005101](#) [117-83-652-41-005101](#) [117-83-642-41-005101](#) [117-83-628-41-005101](#) [117-83-624-41-005101](#) [117-87-428-41-005101](#) [117-87-316-41-005101](#) [117-83-764-41-005101](#) [117-83-668-41-005101](#) [117-83-664-41-005101](#) [117-87-648-41-005101](#) [117-87-640-41-005101](#) [117-87-624-41-005101](#) [117-87-620-41-005101](#) [117-87-448-41-005101](#) [117-87-430-41-005101](#) [117-83-648-41-005101](#) [117-87-628-41-005101](#) [117-87-668-41-005101](#) [117-87-664-41-005101](#) [117-87-656-41-005101](#) [117-87-652-41-005101](#) [117-83-620-41-005101](#) [117-83-448-41-005101](#) [117-83-430-41-005101](#) [117-83-428-41-005101](#) [117-83-316-41-005101](#) [117-83-656-41-005101](#)