

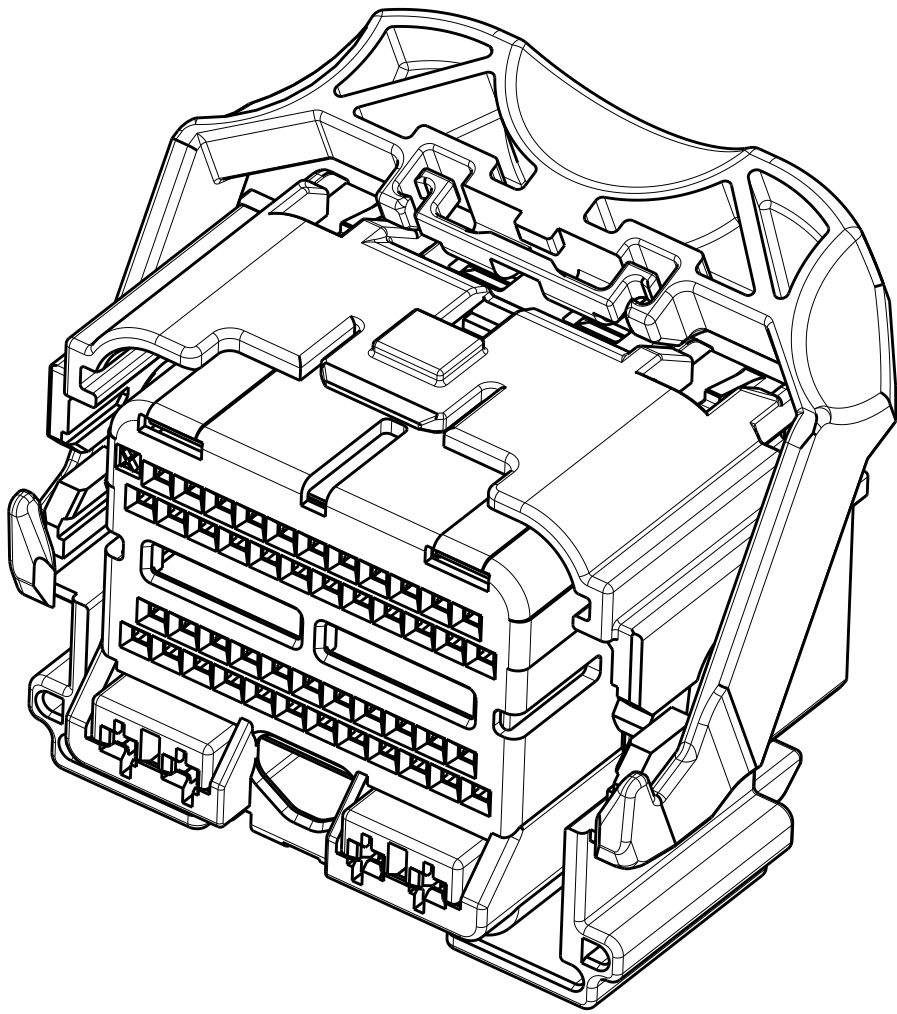


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
A15		REVISED PER ECO-11-002569	25FEB2011	DLD	DCM
A16		REVISED PER ECO-14-011102	22JUL2014	DLD	DCM

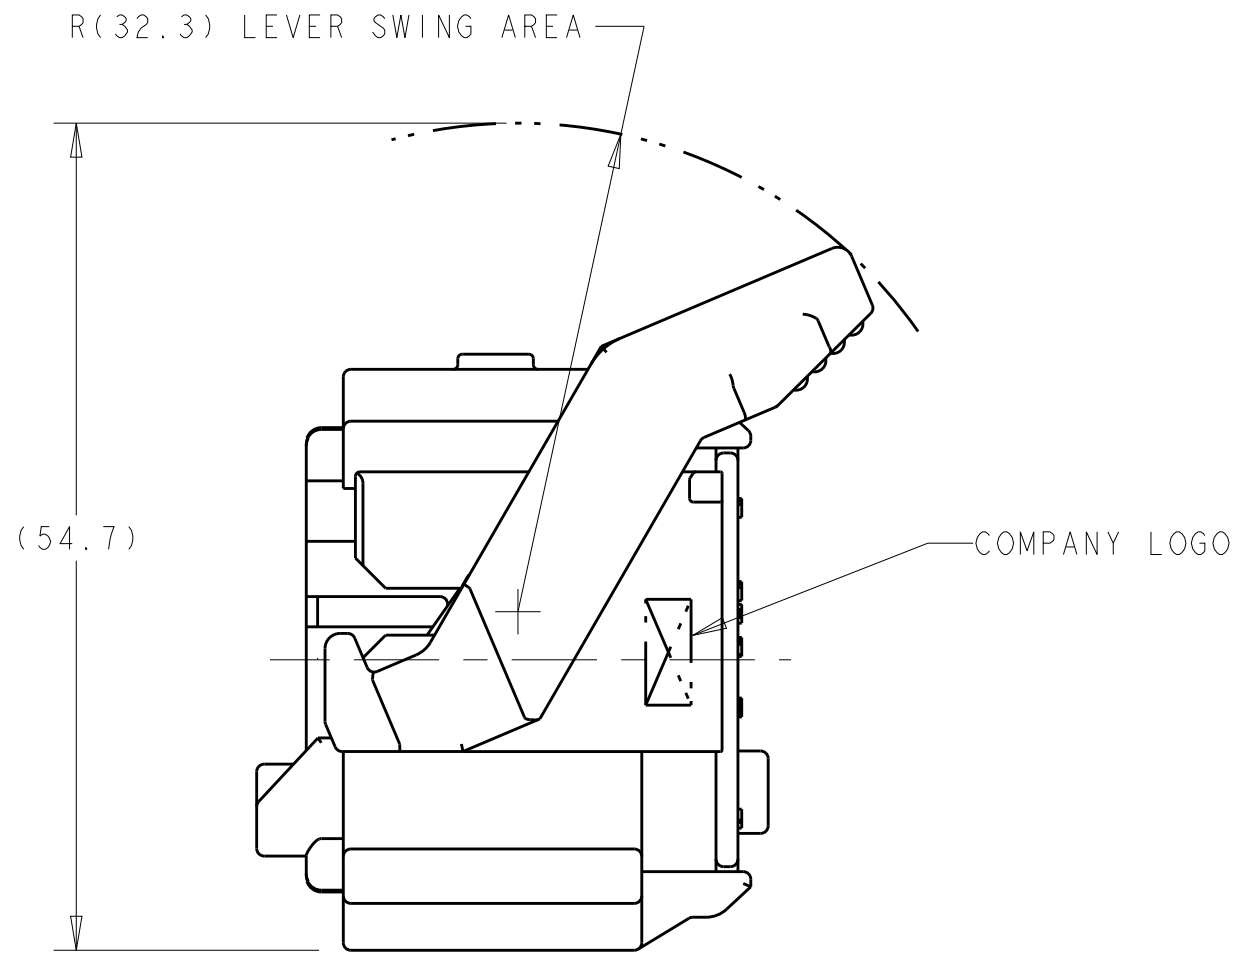


PART NUMBER:
1438691-1
SHOWN WITH SPACER
IN SEATED POSITION
SCALE 2:1



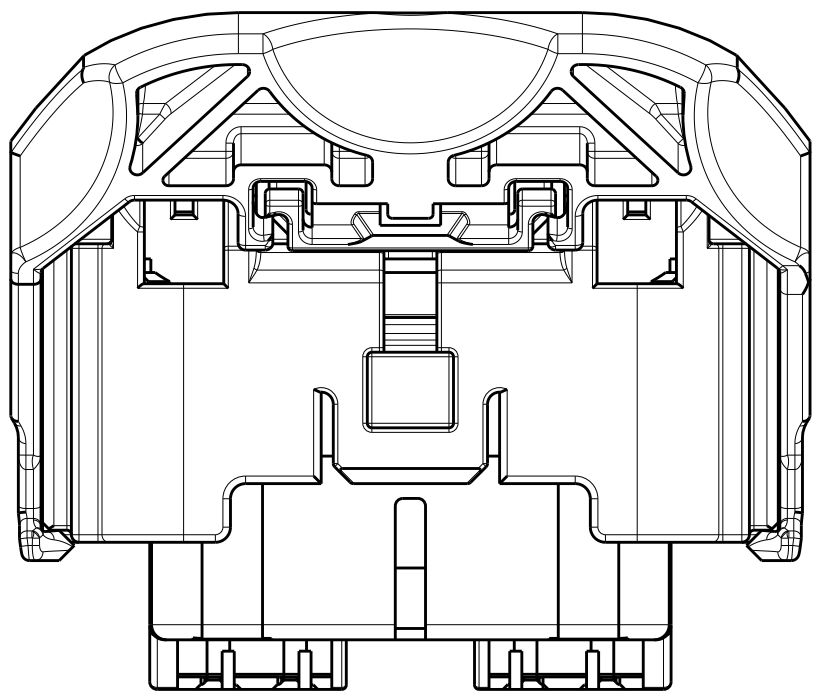


SHOWN WITH SPACER IN SEATED POSITION

- ⚠️ PRINT TE PART NUMBER AND TRACEABILITY (YY : 2 DIGIT YEAR, JJJ = JULIAN DATE, HH = 2 DIGIT MILITARY HOUR CODE) IN THE LOCATION AT ASSEMBLY.
- ⚠️ OPTIONAL WIRE SHIELD PART NUMBERS (SOLD SEPARATELY) 1438126, 1438180, 1488373, AND 1488572. CONTACT TE ENGINEERING FOR MINIMUM FEED THRU CONDITION.
3. APPLICABLE TERMINAL PART NUMBERS (SOLD SEPARATELY) FOR TIN APPLICATIONS: 1393367 AND 1393366. FOR GOLD APPLICATIONS: 1393365 AND 1393364 FOR TERMINATION AND REELING OPTIONS SEE DRAWINGS 1393367, 1393366, 1393365, AND 1393364.
4. APPLICABLE MOLEX (1.5) POWER TERMINAL PART NUMBERS: 33012-0002 TIN 0.50-1.50mm²
5. CAM LEVER AND SPACER ARE SHIPPED IN THEIR PRE-ASSEMBLED POSITIONS.
6. REFERENCE TE INSTRUCTION SHEET 408-8893.

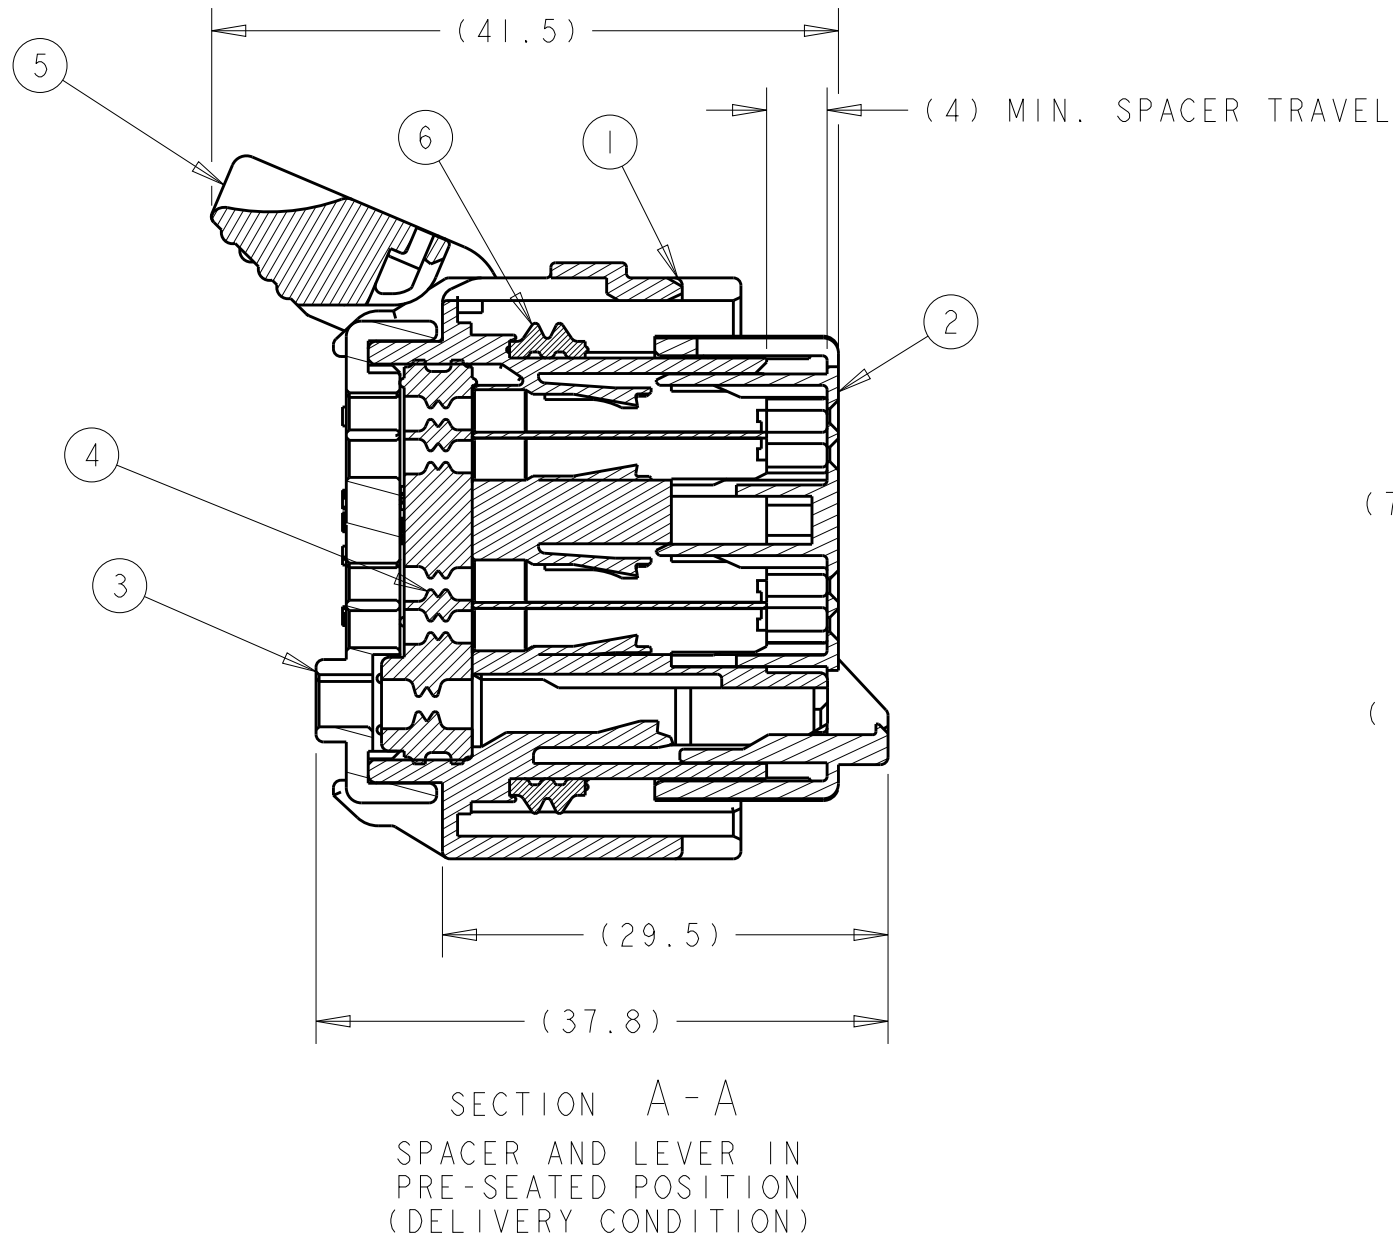

SECTION A-A
SPACER AND LEVER IN
PRE-SEATED POSITION
(DELIVERY CONDITION)

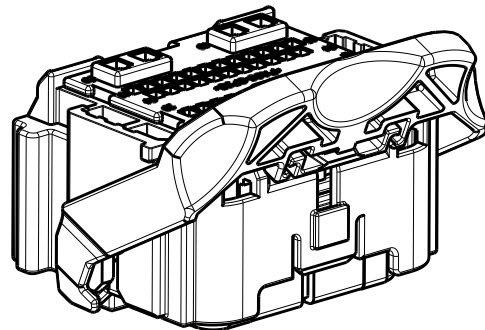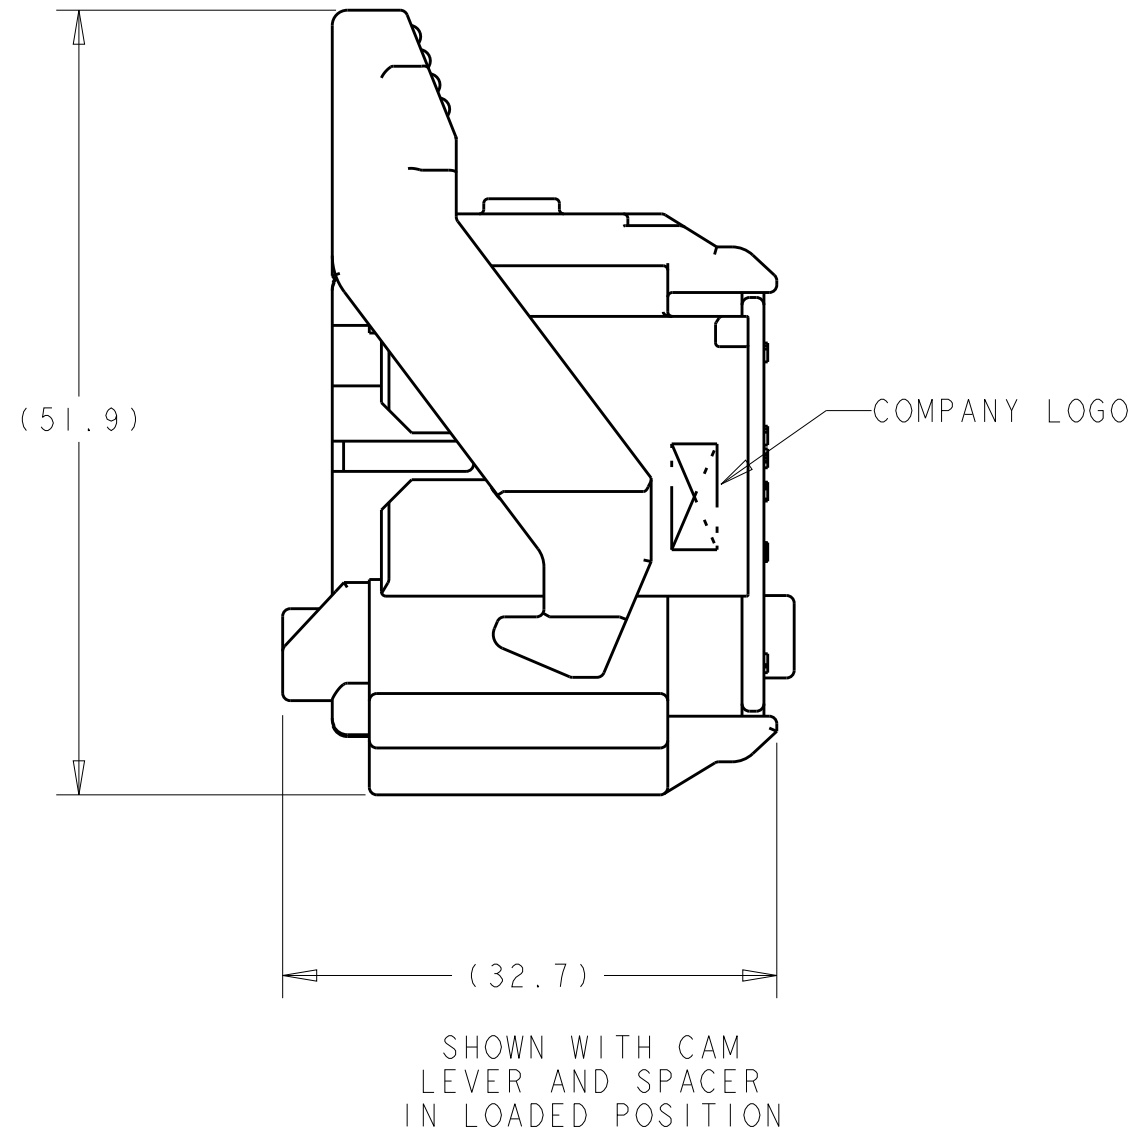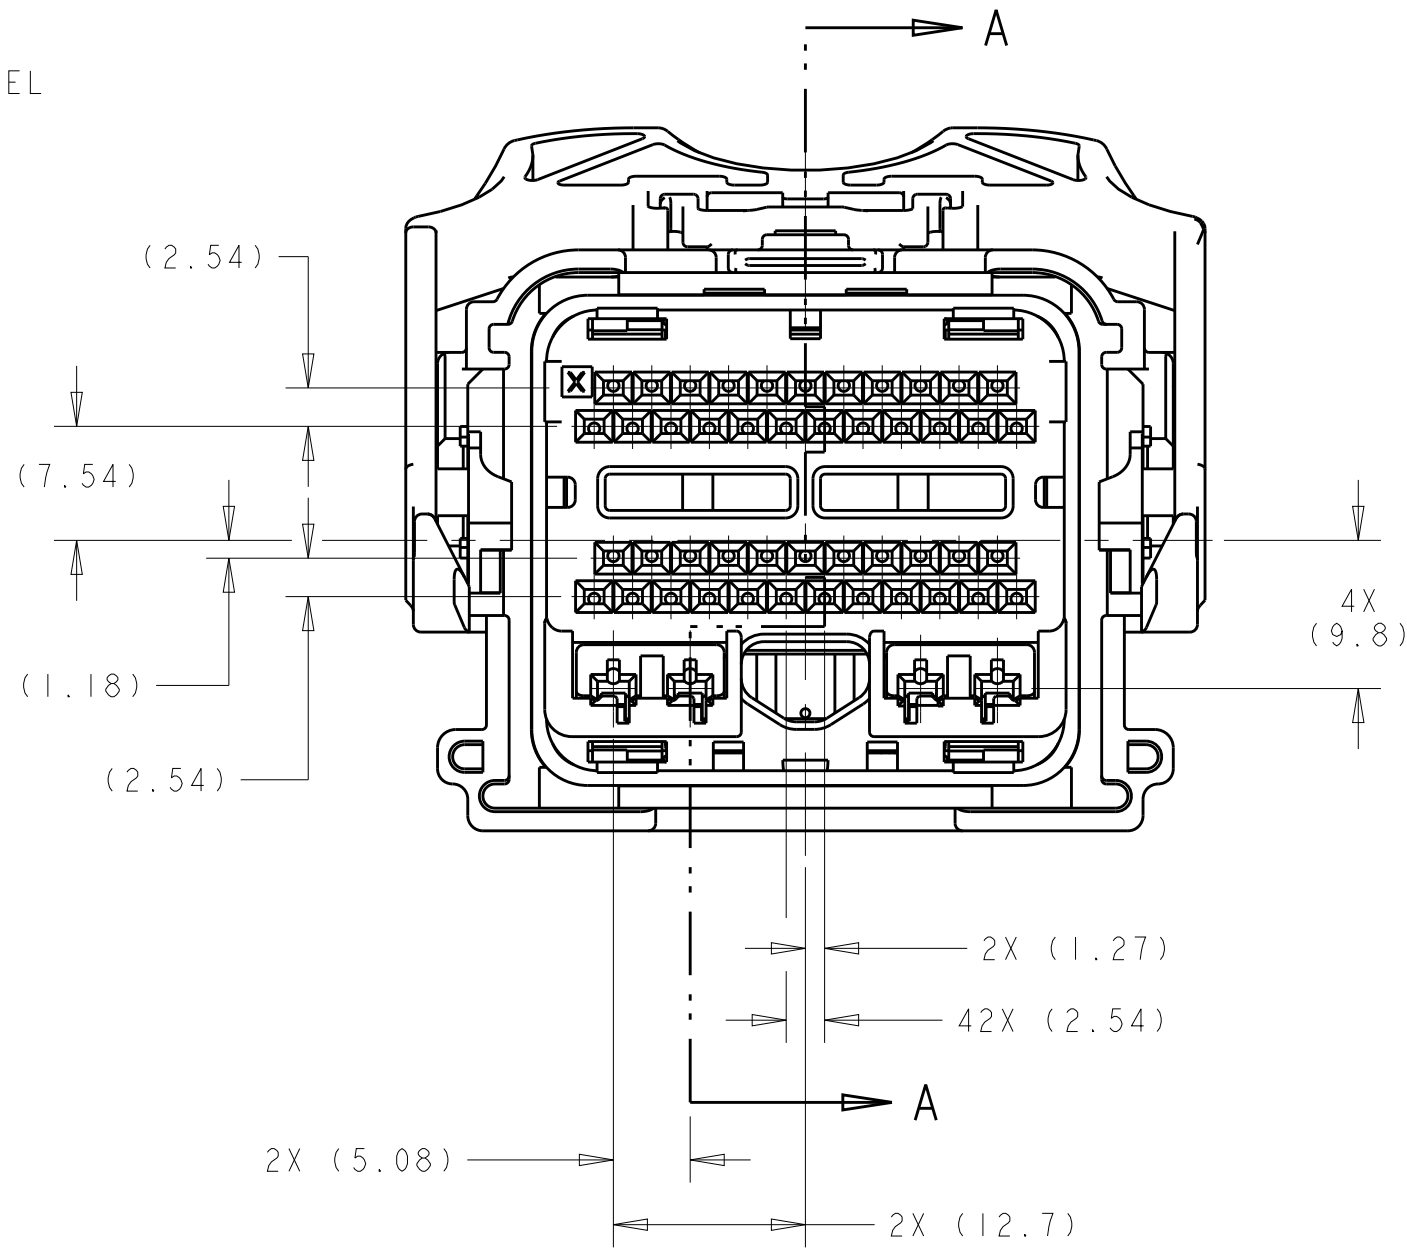

SCALE 1:1

GREEN	PERIMETER SEAL	6
GRAY	LEVER	5
BROWN	GROMMET SEAL	4
BLACK	COVER	3
RED	SPACER	2
BLACK	HARNESS, KEY "A"	1
PART COLOR	DESCRIPTION	ITEM NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. CRISAMORE 21JUL2004	TE Connectivity	
		CHK M. HITCHCOCK 21JUL2004		
		APVD C. MARTIN 21JUL2004		
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:	NAME	
mm		0 PLC ±.3	ASSEMBLY, 50-WAY, KEY A, PCM HARNESS	
		1 PLC ±0.3		
		2 PLC ±0.10		
		3 PLC ±.1		
		4 PLC ±.1	SIZE CAGE CODE DRAWING NO	
		ANGLES ±1°	A100779C=1438691	
MATERIAL		FINISH	RESTRICTED TO	
-		-	-	
-		-	Customer Drawing	
			SCALE 2:1 SHEET 1 OF 4 REV A16	



1. GENERAL TOLERANCE:
 ± 0.3 ALL ONE PLACE DIMENSIONS
 ± 0.10 ALL TWO PLACE DIMENSIONS
 $\pm 1^{\circ}00'$ ALL ANGULAR DIMENSIONS

2. DRAFT ANGLE PERMISSIBLE ONLY WITHIN DRAWING TOLERANCE.


3 SEALING SURFACE. NO WITNESS LINES OR DAMAGE PERMITTED.

4. ALL UNMARKED RADII TO BE 0.5 MAX., UNLESS OTHERWISE SPECIFIED.


5 VENT HOLE SIZE AND LOCATION IS OPTIONAL.

6 THIS AREA TO REMAIN CLEAR FOR THE HARNESS ASSEMBLY.

 TERMINAL POSITION IDENTIFICATION.

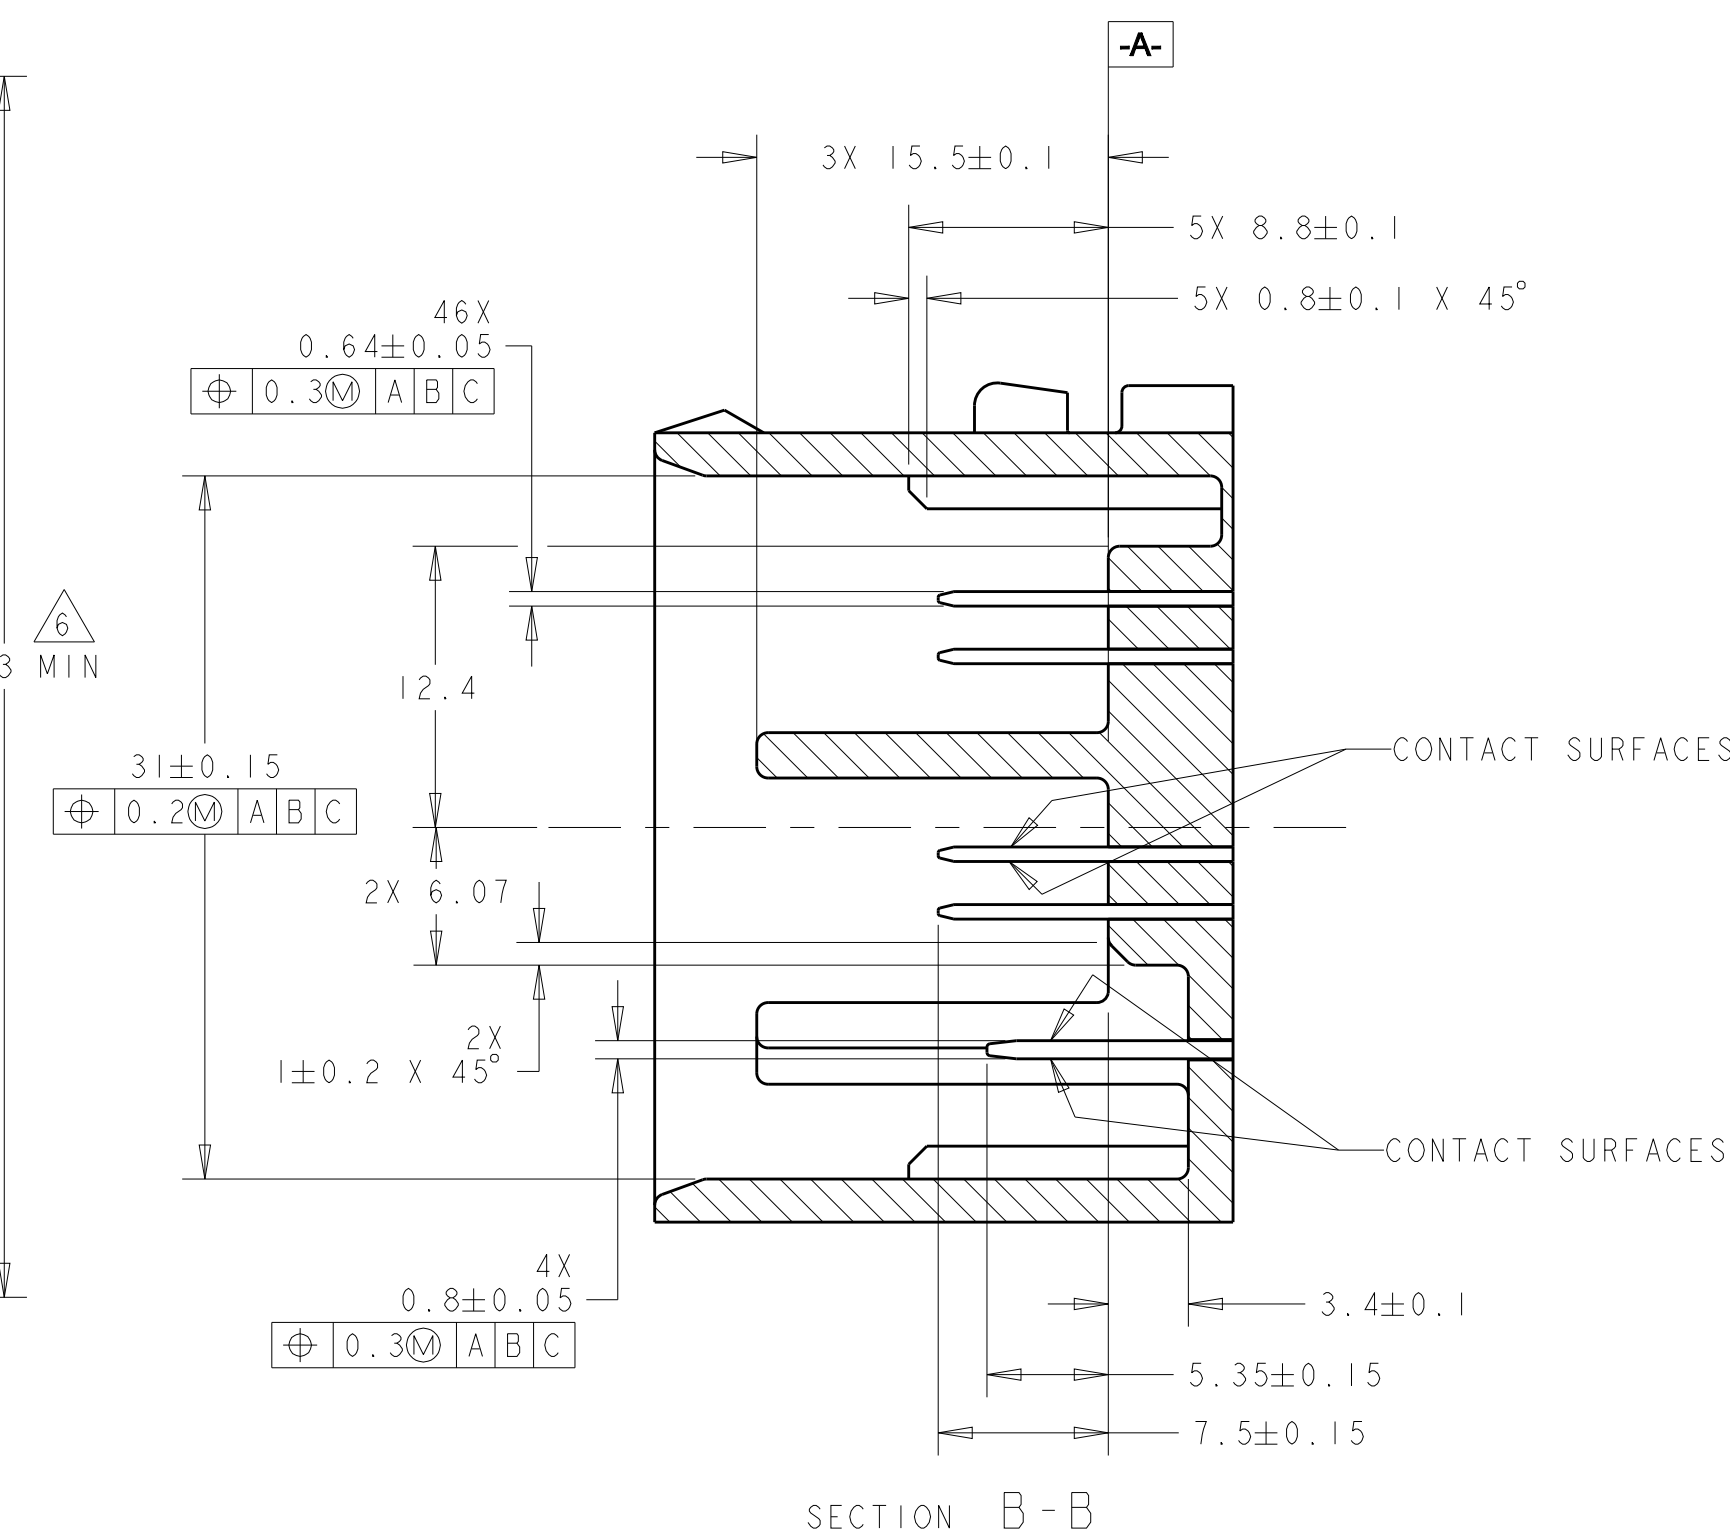

SECTION B-B

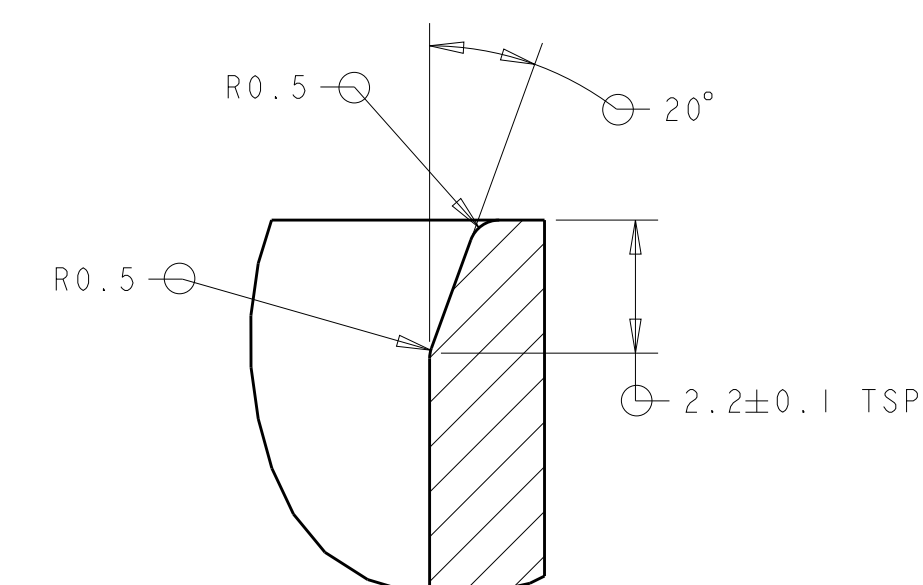

DETAIL E
SCALE 8:1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B 21JUL2004 CRK M 21JUL2004 CHK M 21JUL2004 APV C 21JUL2004		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±. 1 PLC ±0.3 2 PLC ±. 3 PLC ±. 4 PLC ±. ANGLES ±1°		NAME ASSEMBLY, 50-WAY, KEY A, PCM HARNESS	
		PRODUCT SPEC - APPLICATION SPEC -		SIZE A1	
MATERIAL - - -		FINISH - - -		CAGE CODE 00779	
		WEIGHT -		DRAWING NO C1438691	
		Customer Drawing		SCALE 2:1 SHEET 2 OF 1 REV A	

8	7	6	5	4	3	2	1
THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION		20			
COPYRIGHT 20		BY -		ALL RIGHTS RESERVED.			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-1438691-4](#)