


LOC	DIST	REVISIONS					
CM	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			B	REV PER ECR 10-018921	14SEPT10	JR	TM

D


C

B




A

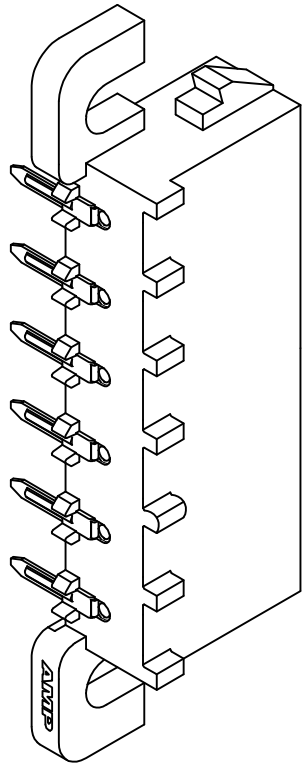



3-DIMENSIONAL MODEL
NTS

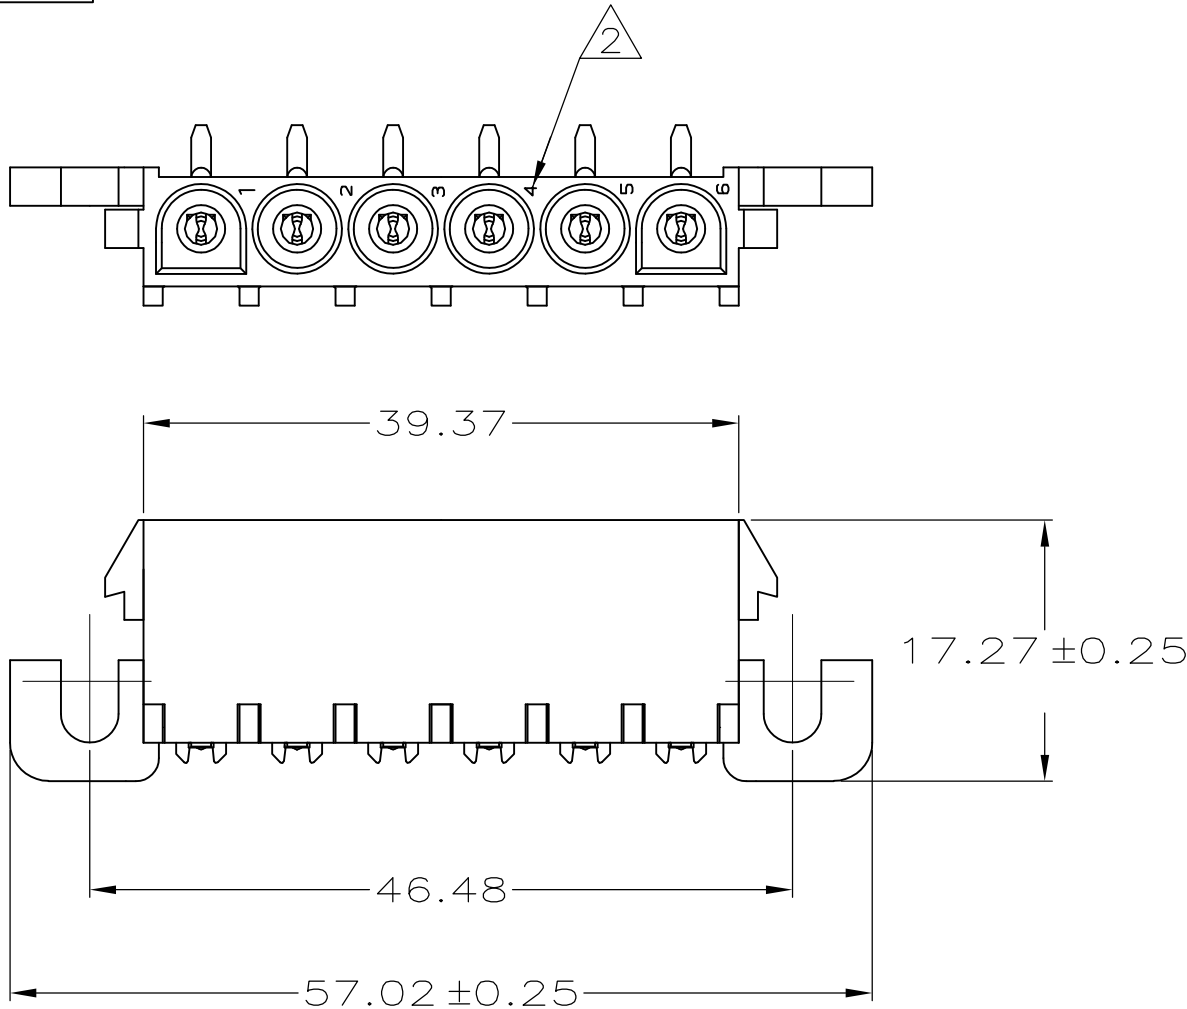

1. PARTS COMPLY WITH AMP SOLDERABILITY SPECIFICATION 109-11-5.
2. CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES,BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.
3. FLAMMABILITY V2 FOR THICKNESS 0.38mm, 1.5mm, qnd 3.0mm PER IEC 60695-11-10.
4. GLOW-WIRE FLAMMABILITY (GWFI) 800°C FOR THICKNESS 0.38mm AND 0.75mm PER IEC 60695-2-12.
5. GLOW-WIRE FLAMMABILITY (GWFI) 960°C FOR THICKNESS 1.5mm AND 3.0mm PER IEC 60695-2-12.
6. GLOW-WIRE IGNITION (GWIT) 825°C FOR THICKNESS 0.38mm, 0.75mm, 1.5mm AND 3.0mm PER IEC 60695-2-13.

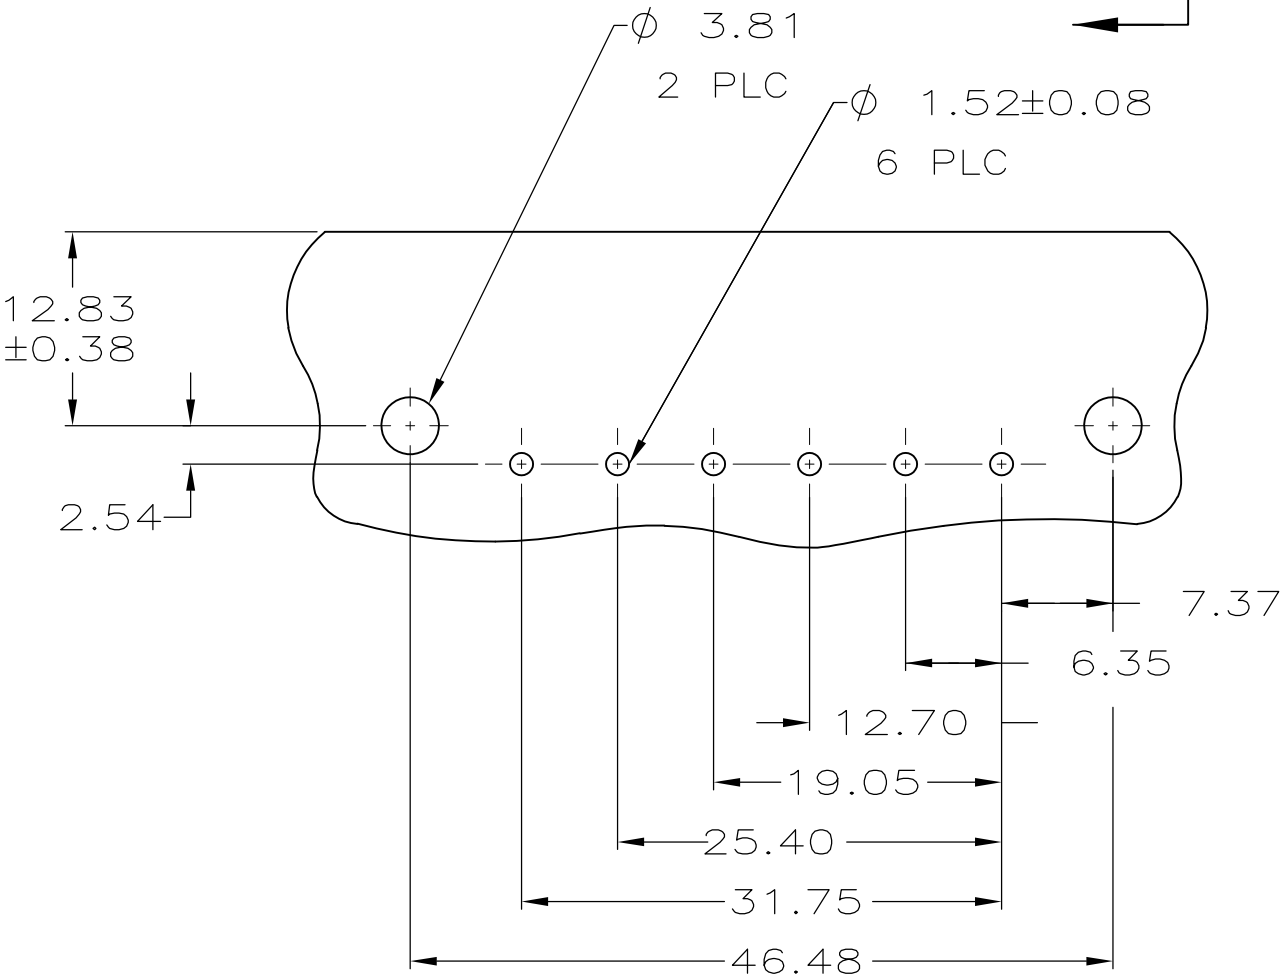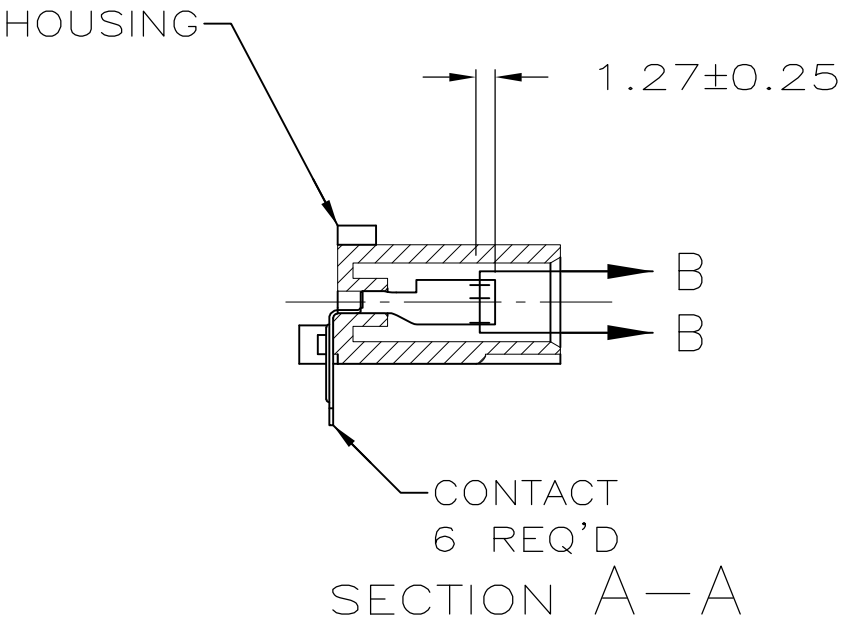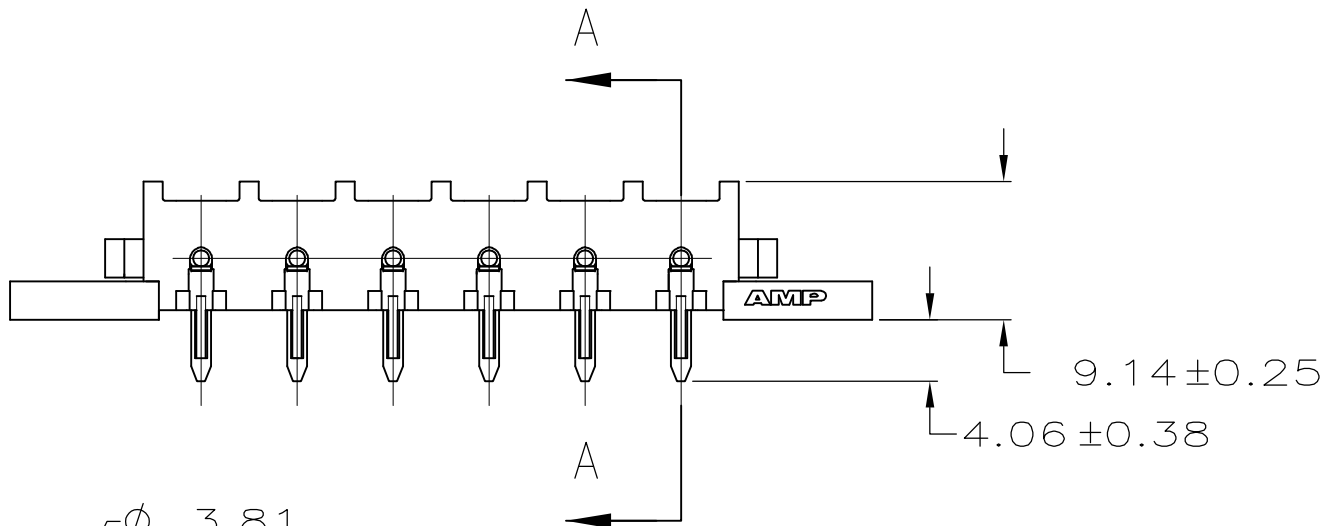

RECOMMENDED MOUNTING HOLE PATTERN
FOR 1.57 THICK P.C. BOARD

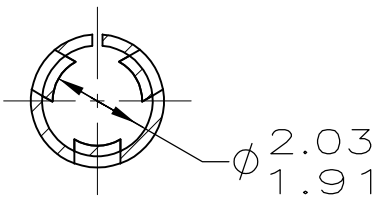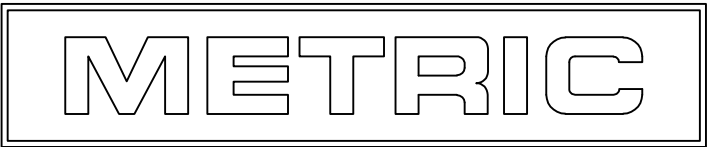

SECTION B-B
SCALE 6:1

3.81	.150	57.02	2.245
2.54	.100	46.48	1.830
2.03	.080	39.37	1.550
1.91	.075	31.75	1.250
1.57	.062	25.40	1.000
1.52	.060	19.05	.750
1.27	.050	17.27	.680
0.38	.015	12.83	.505
0.25	.010	12.70	.500
0.13	.005	9.14	.360
0.08	.003	7.37	.290
0.00127	.000050	6.35	.250
0.00076	.000030	4.06	.160
MM	IN	MM	IN
CONVERSION TABLE			

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN K. WHITAKER 14MAR2008		 Tyco Electronics Corporation Harrisburg, Pa 17105-3608							
				CHK D. COLEY 14MAR2008									
DIMENSIONS: mm		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		APVD D. COLEY 14MAR2008		NAME							
		0 PLC ± -		PRODUCT SPEC		SOCKET HEADER ASSEMBLY, RIGHT ANGLE MOUNT, 6 POSITION, UNIVERSAL MATE-N-LOK(TM)							
		1 PLC ± -		—									
		2 PLC ± 0.13		—									
		3 PLC ± -		APPLICATION SPEC									
		4 PLC ± -		—									
ANGLES ± -				WEIGHT —		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO	
MATERIAL		FINISH				A2		00779		C=1586937		—	
SEE TABLE		SEE TABLE		CUSTOMER DRAWING		SCALE		2:1		SHEET		1 of 1	
												REV B	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1586937-1](#)