

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0350689812

Status:


Active

Overview:

Standard Quick-Disconnect Terminals

Description:

MP-Lock™ Quick Disconnect, Female, for 16-20 AWG (1.31-0.52mm²), Metal Strip, Tab 4.75 x 0.30mm, Pre-Tin Plated

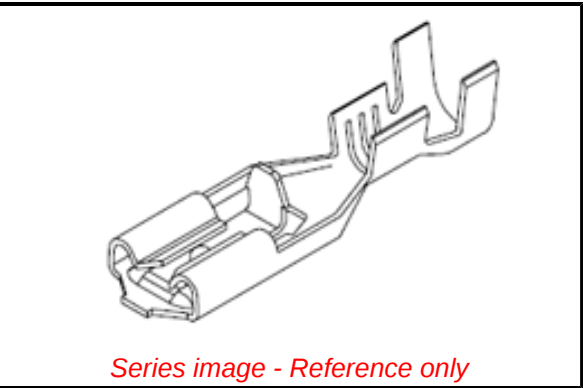

Documents:

[Drawing \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

[Packaging Specification PK-35068-001-001 \(PDF\)](#)

Agency Certification	
CSA	LR95446
UL	E92853
General	
Product Family	Quick Disconnects
Series	35068
Crimp Quality Equipment	Yes
Insulated	No
Overview	Standard Quick-Disconnect Terminals
Product Name	MP-Lock™
Type	Quick Disconnect
UPC	800753785731
Physical	
Barrel Type	Open
Gender	Female
Glow-Wire Compliant	No
Insulation	None
Lock to Mating Part	Yes
Net Weight	0.413/g
Orientation	Straight
Packaging Type	Reel
Polarized to Mating Part	Yes
Tab Thickness	0.30mm
Tab Width	4.75mm
Temperature Range - Operating	-40°C to +105°C
Termination Interface: Style	Crimp or Compression
Wire Insulation Diameter	3.40mm max.
Wire Size AWG	16, 18, 20
Wire Size mm²	0.50-1.30
Electrical	
Voltage - Maximum	300V
Material Info	
Reference - Drawing Numbers	
Packaging Specification	PK-35068-001-001
Sales Drawing	SD-35068-9812

EU ELV

Not Relevant

EU RoHS

China RoHS

Compliant

REACH SVHC

Not Contained Per

-ED/01/2017 (12

January 2017)

Halogen-Free

Status

Low-Halogen

Need more information on product

environmental compliance?

Email productcompliance@molex.com

Please visit the [Contact Us](#) section for any

non-product compliance questions.

China ROHS

Green Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

Search Parts in this Series

35068 Series

Use With

35189 , 35817 , 35961

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[35068-9812](#)