


# Rectangular Package Discrete LED YELLOW, 2 x 5 mm, Low Current

# BIVAR

## R5YDL


- ◆ Rectangular Package
- ◆ RoHS Compliant
- ◆ Diffused Lens
- ◆ Available in Standard Lead Frame style
- ◆ Ideal for Status Indication and Bar Graph Displays
- ◆ 2 mA Low Operating Current

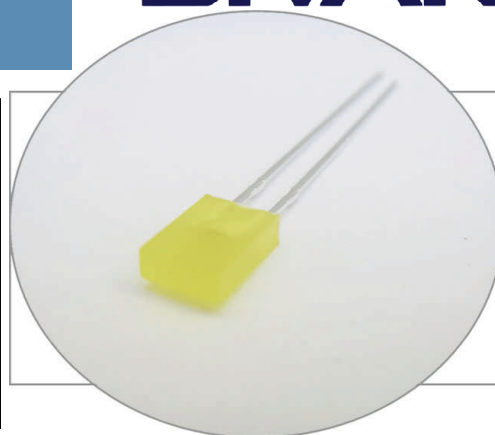

Bivar Rectangular 2 x 5mm Package Low Current LED is special binned at 2 mA and is ideal for those applications where lower power budget is required such as solar or battery-powered portable devices. The rectangular package makes it ideal for greater indication visibility and creating bar graph displays when arranged in linear LED arrays. Bivar offers diffused LED lens for uniform light output. The Standard Lead frame LED is ideal for vertical spacer assemblies and Right Angle Holder assemblies that require lead bends.

| Part Number | Material  | Emitted Color | Peak. Wavelength<br>$\lambda_p$ (nm) TYP. | Lens Appearance | Viewing Angle |
|-------------|-----------|---------------|-------------------------------------------|-----------------|---------------|
| R5YDL       | GaAsP/GaP | YELLOW        | 590nm                                     | Yellow Diffused | 120°          |

## Outline Dimensions

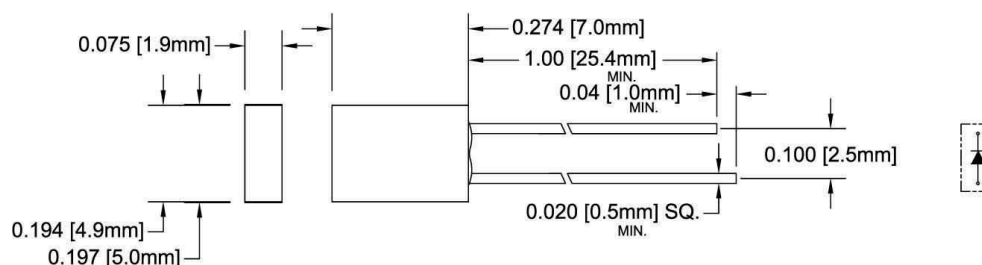


Standard "R5XXL" LED

Recommended Mounting  
Hole Size =  $\varnothing.032^{+.003}_{-.002}$

### Outline Drawings Notes:

1. All dimensions are in inches [millimeters].
2. Standard tolerance:  $\pm 0.010$ " unless otherwise noted.
3. Tolerance of overall epoxy outline:  $\pm 0.020$ " unless otherwise noted.
4. Epoxy meniscus may extend to 0.060" max.

## Part Number Designation

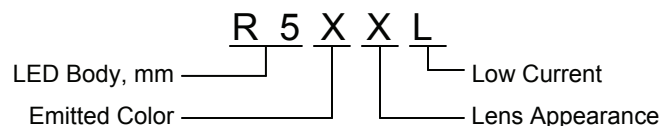

ATTENTION  
OBSERVE PRECAUTIONS  
FOR HANDLING  
ELECTROSTATIC  
SENSITIVE DEVICES



RoHS Compliant



Moisture  
Sensitivity  
Levels 1

Bivar reserves the right to make changes at any time without notice.

# Rectangular Package Discrete LED YELLOW, 2 x 5 mm, Low Current



## Absolute Maximum Ratings

T<sub>A</sub> = 25°C unless otherwise noted

|                                                                                  |              |
|----------------------------------------------------------------------------------|--------------|
| Power Dissipation                                                                | 10 mW        |
| Forward Current ( DC )                                                           | 7 mA         |
| Peak Forward Current <sup>1</sup>                                                | / mA         |
| Reverse Voltage                                                                  | 5 V          |
| Operating Temperature Range                                                      | -25 ~ +85°C  |
| Storage Temperature Range                                                        | -30 ~ +100°C |
| Lead Soldering Temperature ( 3 mm from the base of the epoxy bulb ) <sup>2</sup> | 260°C        |

Notes: 1. 10% Duty Cycle, Pulse Width ≤ 0.1 msec.      2. Solder time less than 5 seconds at temperature extreme.

## Electrical / Optical Characteristics

T<sub>A</sub> = 25°C & I<sub>F</sub> = 2 mA unless otherwise noted

| Part Number | Forward Voltage (V) <sup>1</sup> |     |     | Recommend Forward Current (mA) |     |     | Reverse Current (μA) | Dominant Wavelength (nm) <sup>2</sup> |     |     | Luminous Intensity I <sub>v</sub> (mcd) |     |     | Viewing Angle 2 Θ ½ (deg) |
|-------------|----------------------------------|-----|-----|--------------------------------|-----|-----|----------------------|---------------------------------------|-----|-----|-----------------------------------------|-----|-----|---------------------------|
|             | MIN                              | TYP | MAX | MIN                            | TYP | MAX | MAX                  | MIN                                   | TYP | MAX | MIN                                     | TYP | MAX | TYP                       |
| R5YDL       | /                                | 2.0 | 2.8 | /                              | 2   | /   | 100                  | /                                     | /   | /   | /                                       | 1   | /   | 120                       |

Notes: 1. Tolerance of forward voltage : ±0.05V.      2. Tolerance of dominant wavelength : ±1.0nm.

Bivar reserves the right to make changes at any time without notice.

# Rectangular Package Discrete LED YELLOW, 2 x 5 mm, Low Current



## Typical Electrical / Optical Characteristics

$T_A = 25^\circ\text{C}$  unless otherwise noted

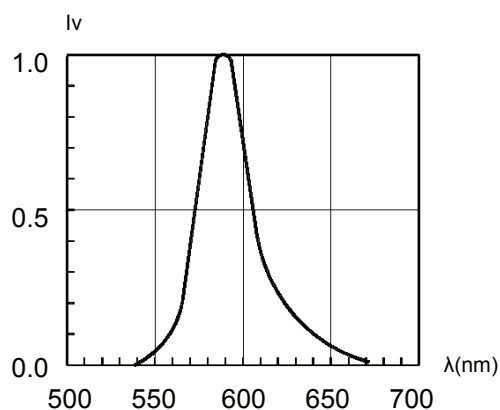


Fig. 1 Relative Luminous Intensity vs. Wavelength

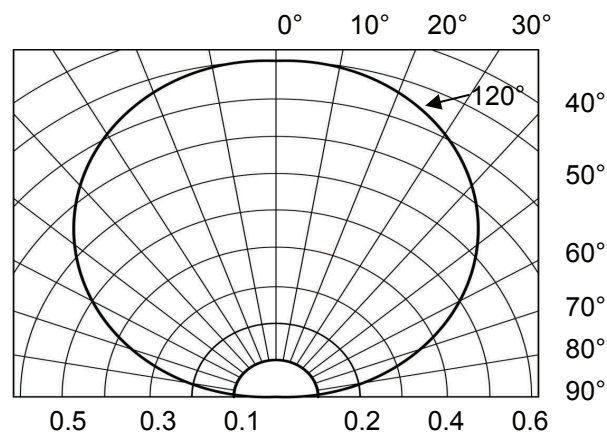


Fig. 2 Directivity Radiation Diagram

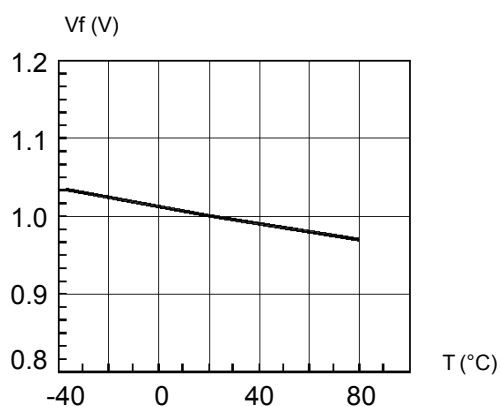


Fig. 3 Forward Voltage vs. Temperature

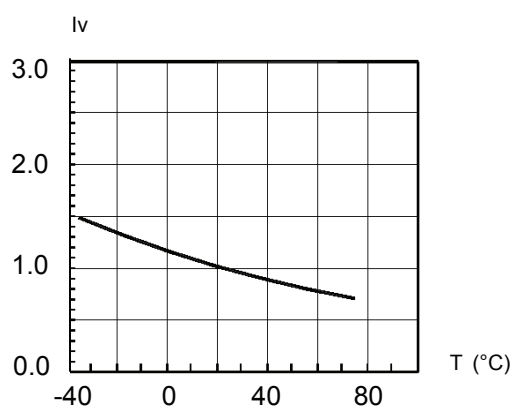



Fig. 4 Relative Luminous Intensity vs. Temperature

Bivar reserves the right to make changes at any time without notice.

# Rectangular Package Discrete LED YELLOW, 2 x 5 mm, Low Current


# BIVAR

## Recommended Soldering Conditions

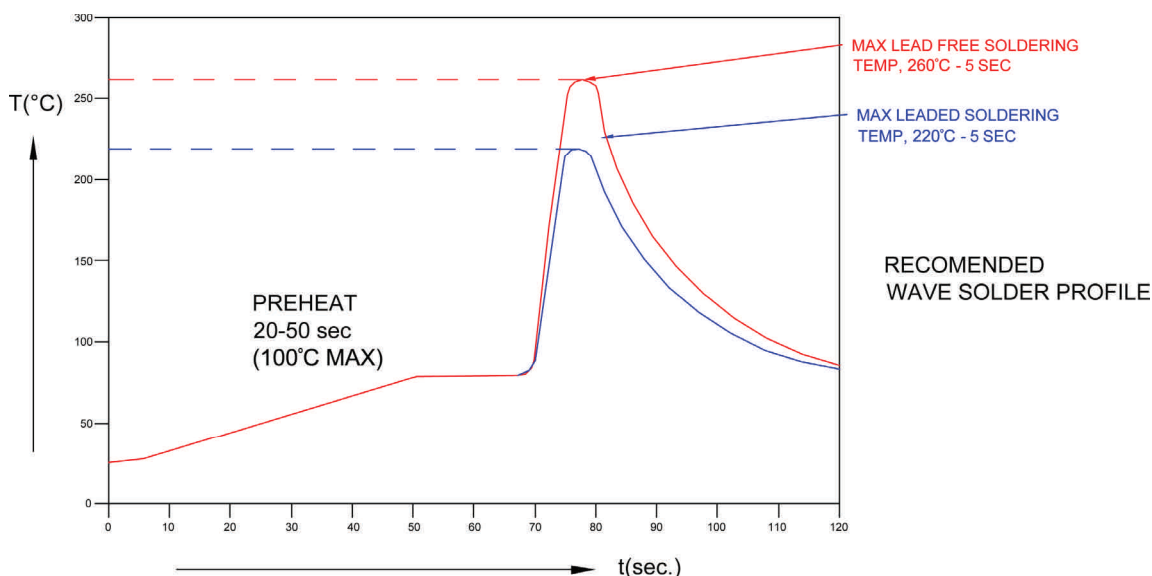

| Recommended Lead Free Wave Soldering Profile                                                       |                                         |
|----------------------------------------------------------------------------------------------------|-----------------------------------------|
| Preheat Temperature: 100°C Max.                                                                    | Peak Temperature: 260°C Max.            |
| Preheat Time: 20 ~ 50 Seconds                                                                      | Solder Time Above 217°C: 5 Seconds Max. |
| Note: Turn off top heater at preheat to prevent the lamp body directly exposed to the heat source. |                                         |

## Packaging and Labeling Plan

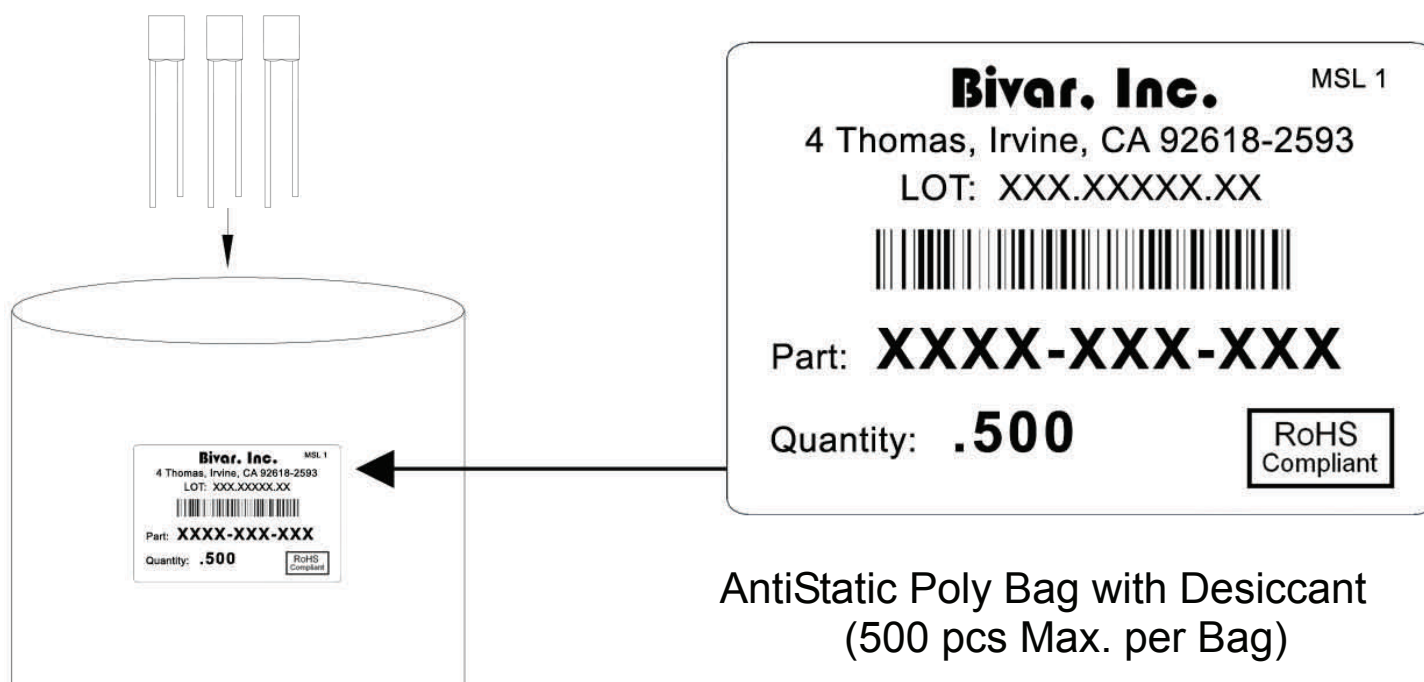

Bivar reserves the right to make changes at any time without notice.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[BIVAR:](#)

[R5YDL](#)