
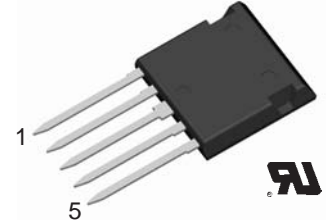


Schottky Three Phase Rectifier Bridge

in ISOPLUS i4-PAC™

$$V_{RRM} = 45 \text{ V}$$

$$I_{D(AV)M} = 45 \text{ A}$$



Rectifier Bridge

| Symbol | Conditions | Maximum Ratings | |
|--------------|--|-----------------|---|
| V_{RRM} | | 45 | V |
| I_{FAV} | $T_C = 90^\circ\text{C}$; sine 180° (per diode) | 20 | A |
| $I_{D(AV)M}$ | $T_C = 90^\circ\text{C}$ (bridge) | 45 | A |
| I_{FSM} | $T_{VJ} = 25^\circ\text{C}$; $t = 10 \text{ ms}$; sine 50 Hz | 150 | A |
| P_{tot} | $T_C = 25^\circ\text{C}$ (per diode) | 40 | W |

| Symbol | Conditions | Characteristic Values ($T_{VJ} = 25^\circ\text{C}$, unless otherwise specified) | | |
|------------|--|--|------|----------|
| | | min. | typ. | max. |
| V_F | $I_F = 15 \text{ A}$; $T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$ | 0.55 0.5 | 0.65 | V V |
| I_R | $V_R = V_{RRM}$; $T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$ | 100 | 5 | mA mA |
| C_J | $V_R = 20 \text{ V}$ | 200 | | pF |
| R_{thJC} | (per diode) | | 3.1 | K/W |

Data according to IEC 60747 and refer to a single diode unless otherwise stated.

Component

| Symbol | Conditions | Maximum Ratings | |
|------------|---|-----------------|----|
| T_{VJ} | | -55...+150 | °C |
| T_{stg} | | -55...+125 | °C |
| V_{ISOL} | $I_{ISOL} \leq 1 \text{ mA}$; 50/60 Hz | 2500 | V~ |
| F_c | mounting force with clip | 20...120 | N |

| Symbol | Conditions | Characteristic Values | | |
|---------------|---|-----------------------|------|------|
| | | min. | typ. | max. |
| C_P | coupling capacity between shorted pins and mounting tab in the case | | 40 | pF |
| R_{thCH} | with heatsink compound | | 0.15 | K/W |
| d_S, d_A | pin - pin | 1.7 | | mm |
| d_S, d_A | pin - backside metal | 5.5 | | mm |
| Weight | | 9 | | g |

IXYS reserves the right to change limits, test conditions and dimensions.


Features

- Schottky diodes
 - very low forward voltage
 - extremely fast switching
- ISOPLUS i4-PAC™ package
 - isolated back surface
 - low coupling capacity between pins and heatsink
 - enlarged creepage towards heatsink
 - application friendly pinout
 - high reliability
 - industry standard outline
 - UL registered E 72873

Applications

- high frequency rectifiers in
 - automotive drives and converters
 - hand held tools
 - low voltage power supplies
 - battery chargers
 - solar converters

Dimensions in mm (1 mm = 0.0394")

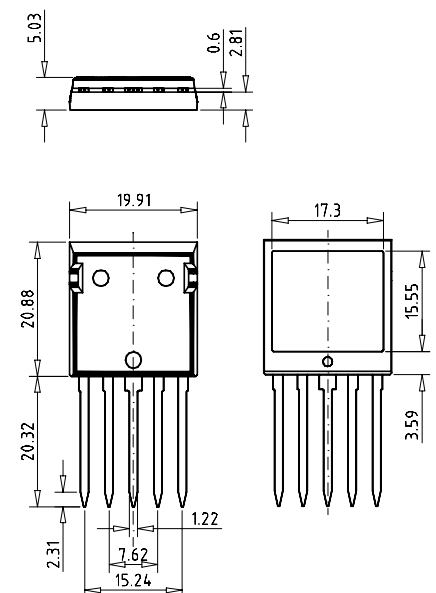

315

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[IXYS:](#)

[FUS45-0045B](#)