



Material	High Conductivity Seamless Copper Tube
Plating	Electro-Tin
Wire Size	1/0 STR/FLEX
Wire Type	Stranded Copper: Class B & C, Compact, Class G, H, I, K, M, Locomotive
Wire Strip Length	3/4 in.
Stud Size	3/8 in.
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.
UL Temperature Rating	90° C
C.S.A Certified Wire Connector	Yes
Panduit Color Code on Barrel	PINK
Panduit Die Index No. on Barrel	P42
Alternate Industry Die Index No. ( ) on Barrel	(12)

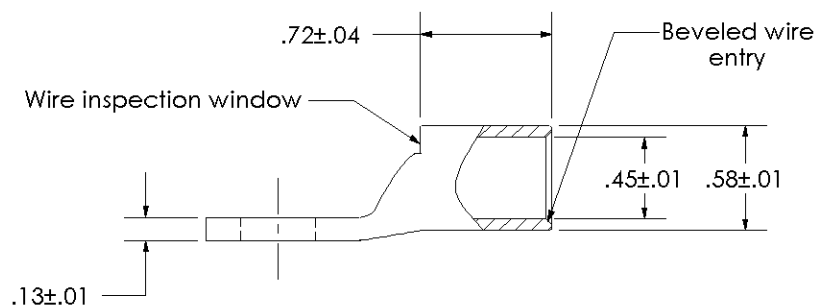

LISTED  
Wire Connector

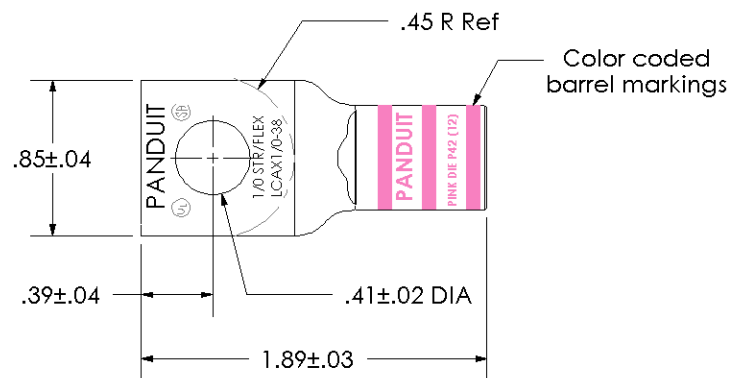

						<div><div>PANDUIT</div><div>CORP. TINLEY PARK, ILLINOIS</div></div>	
							LCAX1/0-38-X Copper Lug - One-Hole, Standard Flex Barrel
00	6/03	CJW	SAC	RELEASED	10848		
REV	DATE	BY	CHK	DESCRIPTION	ECN	<div>SCALE N/A</div> <div>DRAWING NO / CAD FILE LCAX1_0-38-CUST</div>	

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[LCAX1/0-38-X](#)