


## Specification Sheet

Part Number: MB2.510M4

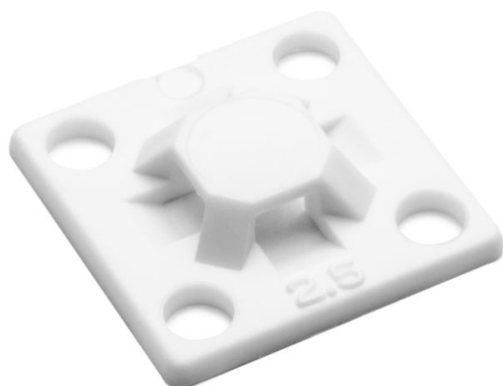

Screw Mount Cable Tie Base, .63" x .63", .10" Max Tie Width, .11" Hole Dia, PA66, White, 1000/pkg

**Article Number** 151-28902

**Type** MB2.5

**Color** White (WH)

**Features & Benefits**

- Compact size fits most mounting applications.
- Simple to install with a screw or rivet.
- Single hole attachment with two-way entry for cable tie.

**Quantity Per** bag

**Product Description**

These cable tie mounts are compact in size. They are designed for simple yet robust installation. They pair with a cable tie for mounting applications including telecom equipment, switchgear and control cabinets.

<b>Short Description</b>	Screw Mount Cable Tie Base, .63" x .63", .10" Max Tie Width, .11" Hole Dia, PA66, White, 1000/pkg
<b>Global Part Name</b>	MB2.5-PA66-WH
<b>Length L (Imperial)</b>	0.625
<b>Length L (Metric)</b>	15.9
<b>Fixation Method</b>	Screw Mounting and Rivet
<b>Width W (Imperial)</b>	0.625
<b>Width W (Metric)</b>	15.9
<b>Cable Ties</b>	T18
<b>Height H (Imperial)</b>	.13
<b>Height H (Metric)</b>	3.30
<b>Cable Tie Width Max (Imperial)</b>	0.1
<b>Cable Tie Width Max (Metric)</b>	2.54
<b>Mounting Hole Diameter D (Imperial)</b>	0.11
<b>Mounting Hole Diameter D (Metric)</b>	2.8 mm
<b>Mounting Hole Diameter D Max (Metric)</b>	2.8

<b>Material</b>	Polyamide 6.6 (PA66)
<b>Material Shortcut</b>	PA66
<b>Flammability</b>	UL 94 V2
<b>Operating Temperature (Metric)</b>	-40°F to +185°F (-40°C to +85°C)
<b>ROHS Complaint</b>	Yes
<b>UL Recognized (US)</b>	Yes
<b>UL Recognized (US and Canada)</b>	Yes
<b>Package Quantity(Imperial)</b>	1000
<b>Package Quantity (Metric)</b>	1000
<b>Customs Number</b>	3926909988