
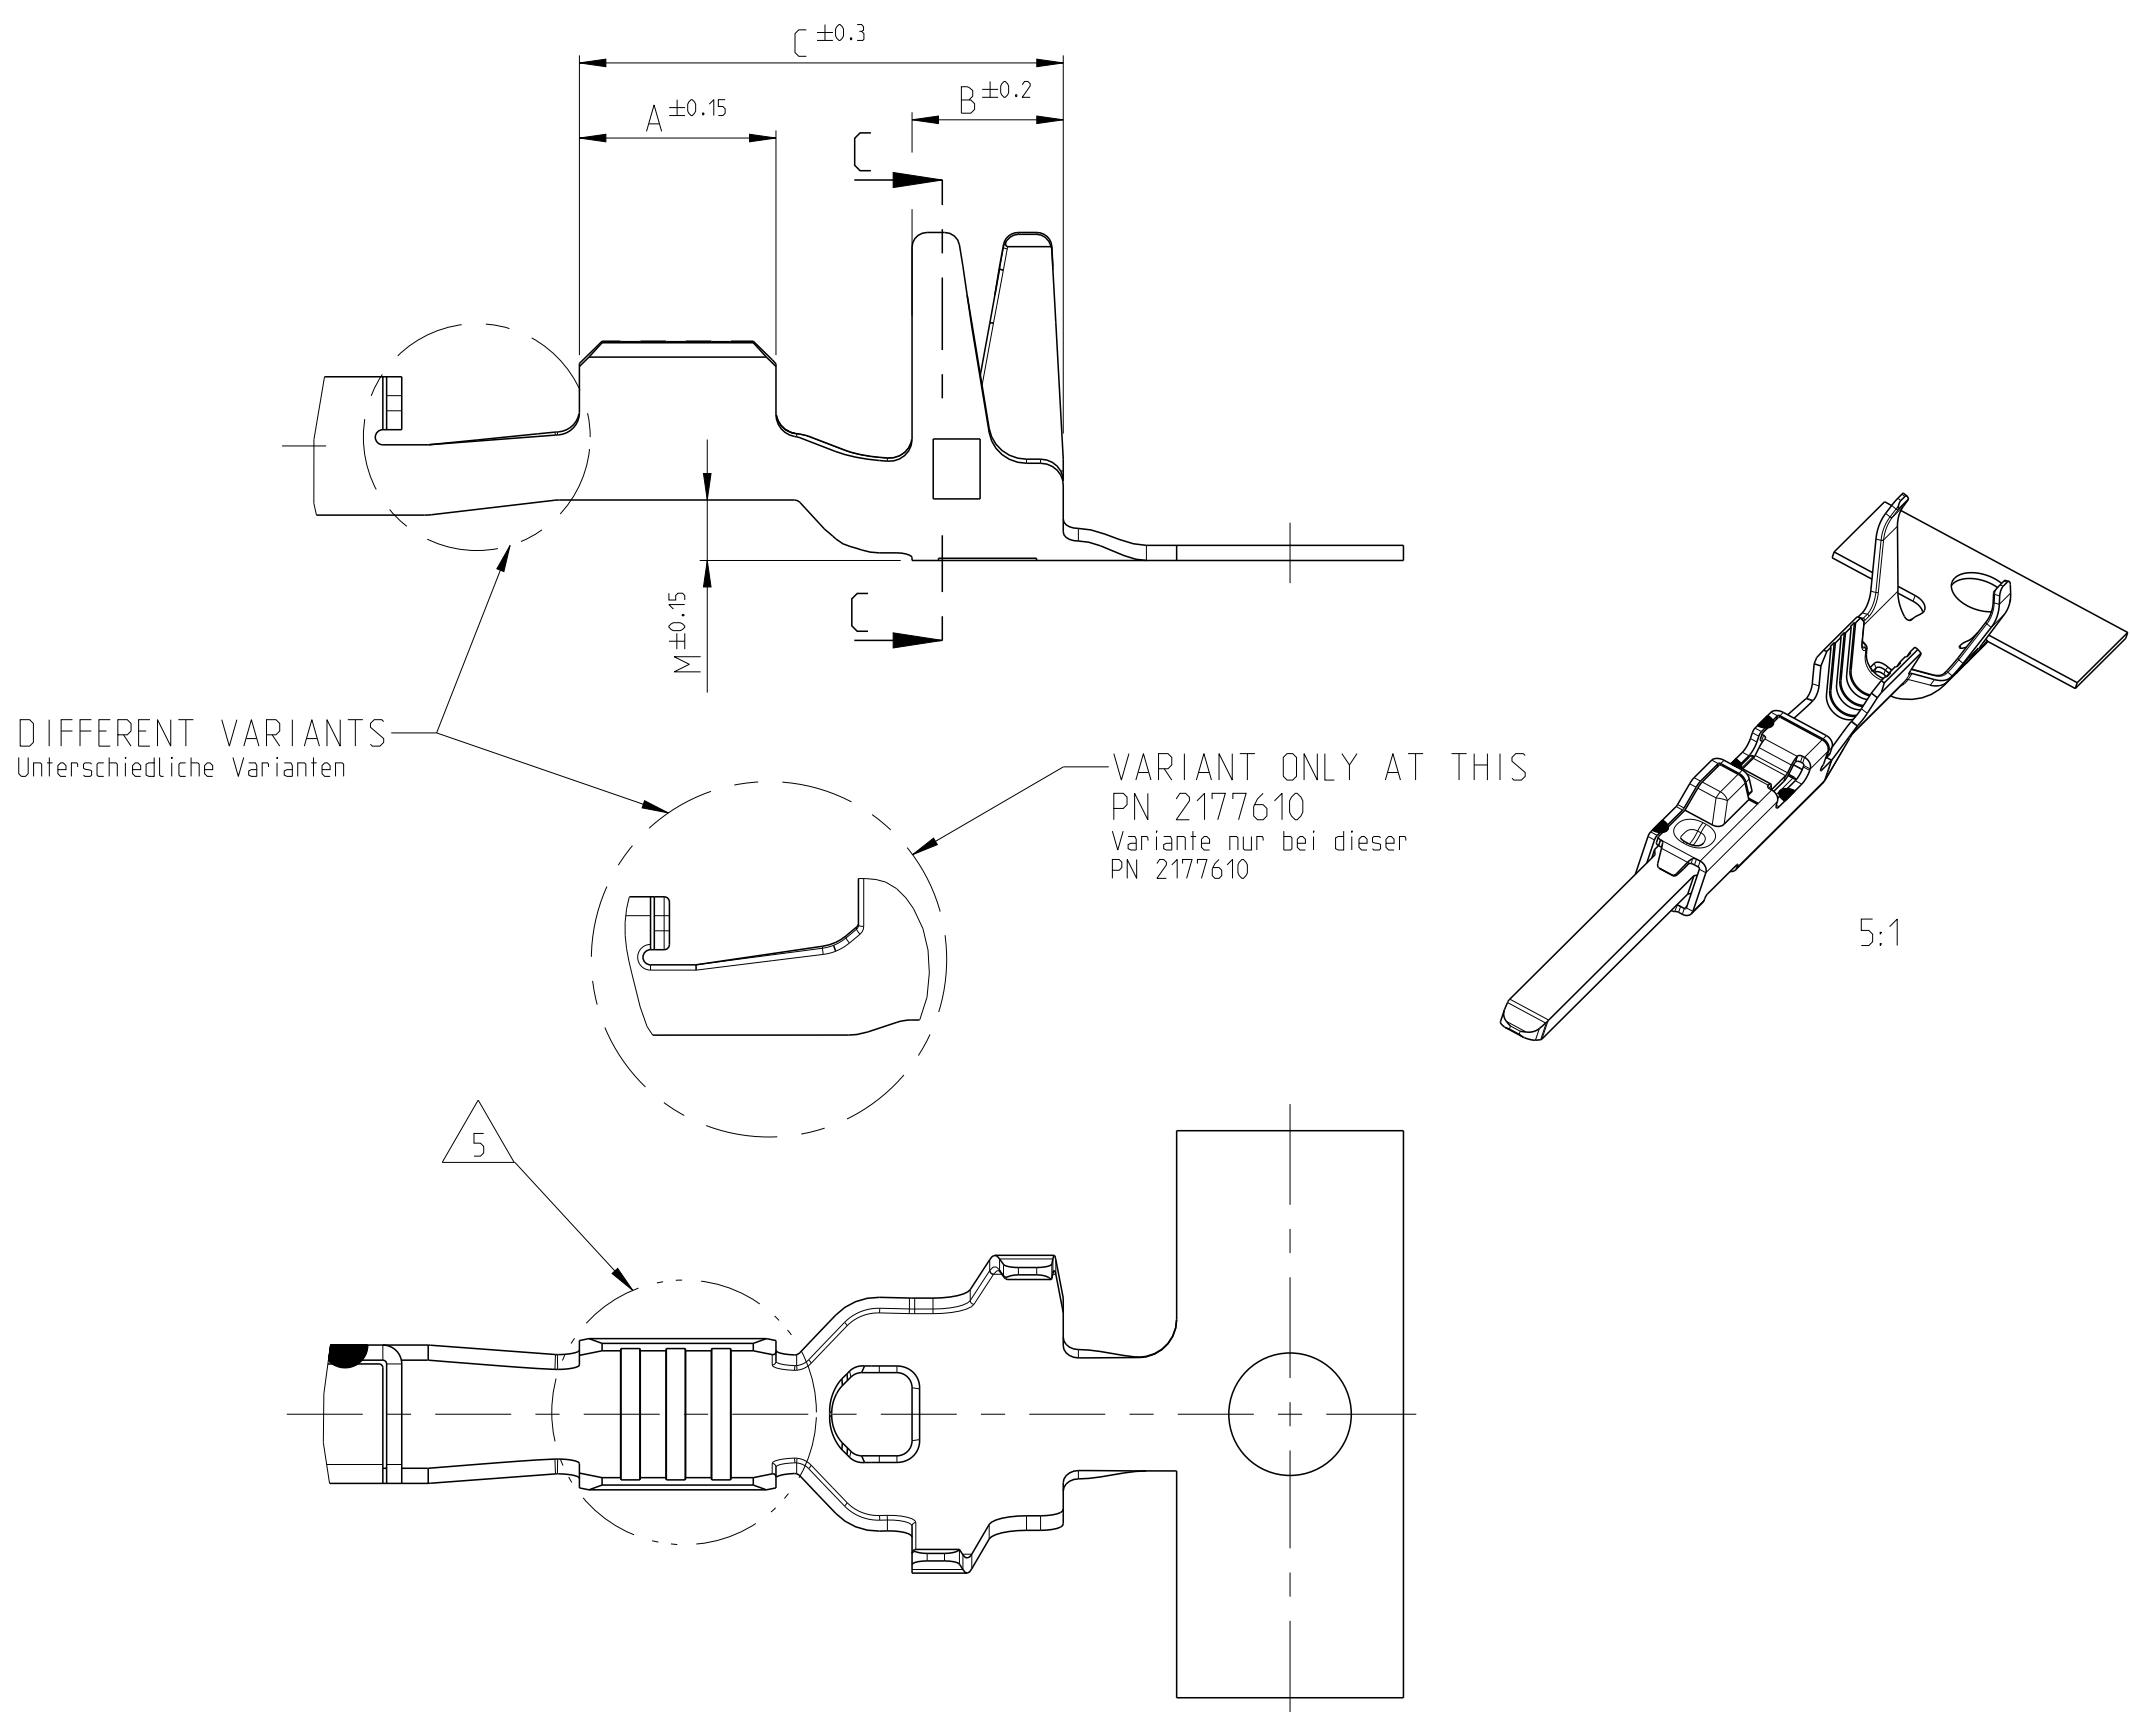
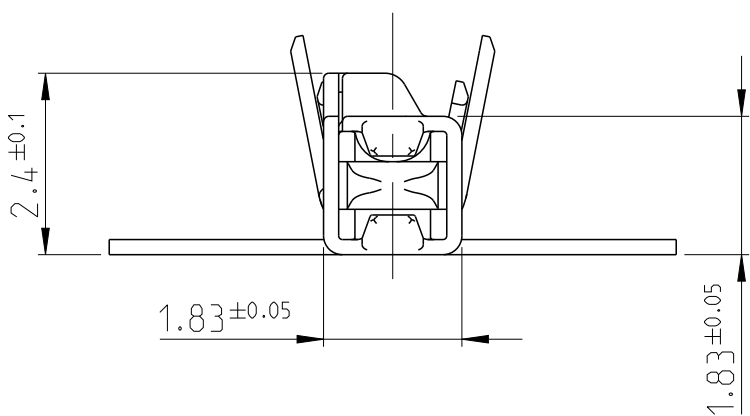







SINGLE WIRE SEALING SYSTEM
Einzelleiter- Dichtungs- System



2177610-3	A	-	1.0-1.5	1.9-2.4	CuSn4	CuSn0.15/0.20	TIN PLATED verzinkt		A = 3.0	E = 2.6	H = 4.4	16.8	SINGLE WIRE SEALING SYSTEM Einzeladichtungssystem		
-	-	-							B = 2.0	G = 2.9	K = 4.3				
2177610-1	A	-						TIN PLATED verzinkt	C = 6.8	D _{gr} = 1.35	D _{iso} = 2.9				M = 0.8
2141116-3	B	-	0.5-0.75	1.4-1.9	CuSn4	CuSn0.15/0.20	TIN PLATED verzinkt		A = 2.6	E = 2.0	H = 4.2	16.3			
-	-	-							B = 2.0	G = 2.1	K = 4.3				
2141116-1	A	-						TIN PLATED verzinkt	C = 6.4	D _{gr} = 1.1	D _{iso} = 2.7				M = 0.8
2141114-3	B	-	0.25-0.35	1.1-1.6	CuSn4	CuSn0.15/0.20	TIN PLATED verzinkt		A = 2.6	E = 1.8	H = 4.2	16.3			
-	-	-							B = 2.0	G = 1.8	D _{iso} = 2.6				K = 4.3
2141114-1	A	-						TIN PLATED verzinkt	C = 6.4	D _{gr} = 0.8	M = 0.8				
1718352-3	-	-	1.0-1.5	1.9-2.4	CuSn0.15/0.20	CuSn0.15/0.20	TIN PLATED verzinkt		A = 3.0	E = 2.6	H = 3.7	16.3			FLR CABLE Leitung
1718352-2	-	-							B = 2.0	G = 2.9	K = 3.9				
1718352-1	-	-						TIN PLATED verzinkt	C = 6.1	D _{gr} = 1.35	D _{iso} = 2.1		M = 0.2		
1718350-3	B	1718390-3	0.5-0.75	1.4-1.9	CuSn0.15/0.20	CuSn0.15/0.20	TIN PLATED verzinkt		A = 3.0	E = 2.0	H = 2.7	16.3			
1718350-2	B	1718390-2							B = 2.0	G = 2.1	K = 2.9				
1718350-1	B	1718390-1						TIN PLATED verzinkt	C = 6.1	D _{gr} = 1.1	D _{iso} = 1.6		M = 0.2		
1718348-3	A	1703698-3	0.25-0.35	1.1-1.6	CuSn0.15/0.20	CuSn0.15/0.20	TIN PLATED verzinkt		A = 2.6	E = 1.8	H = 2.6	15.3			
1718348-2	A	1703698-2							B = 2.0	G = 1.8	K = 2.6				
1718348-1	A	1703698-1						TIN PLATED verzinkt	C = 5.7	D _{gr} = 0.8	D _{iso} = 1.4		M = 0.2		
ORDER NO. Bestell-Nr. STRIP Bandware	REV	ORDER NO. Bestell-Nr. LOOSE PIECE Einzelausfuehrung	WIRE RANGE Drahtgroessen- bereich (mm ²)	INSULATION-Ø Isolation-Ø (mm)	BODY Kontaktkoerper	TAB Flachstecker	BODY Kontaktkoerper	TAB Flachstecker	LENGTH Laenge	WIRE CRIMP Drahtcrimp	INSULATION CRIMP Isolationscrimp	DIMENSION MASS "L" (mm)	INSULATION CRIMP FOR Isolationscrimp "Luer"		
MATERIAL Werkstoff					SURFACE Oberflaeche			CRIMP DIMENSIONS Crimpabmessungen (mm)							

-

4805 (3/11)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1718350-2](#)