
## UNCONTROLLED DOCUMENT

PART NUMBER

SSL-LX5093YD-36697

REV.

| REV. | E,C,N. | NUMBER  | AND | REVISION | COMMENTS | D/   | ATE . |
|------|--------|---------|-----|----------|----------|------|-------|
| Α    | E,C,N. | #11148. |     |          |          | 10.3 | 31,06 |

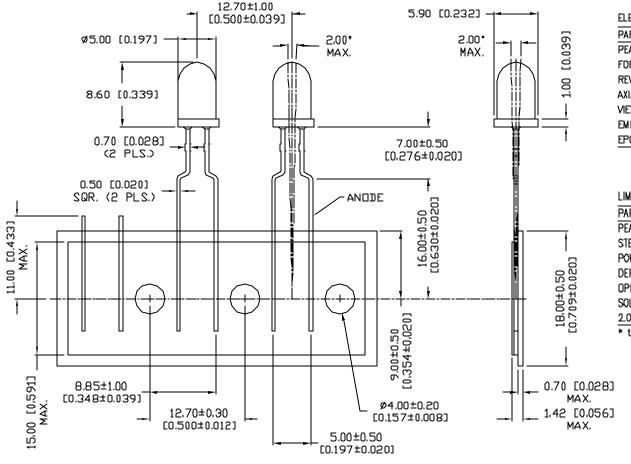

| ELECTRO-OPTICAL CHARACTERISTICS TA=25°C If=20mA |        |             |     |          |           |  |  |
|---|--------|-------------|-----|----------|-----------|--|--|
| PARAMETER                                       | MIN    | TYP         | MAX | UNITS    | TEST COND |  |  |
| PEAK WAVELENGTH                                 | 5      | i85 (YELLOW | )   | nm       | _         |  |  |
| FORWARD VOLTAGE                                 |        | 2.1         | 2.5 | $V_f$    |           |  |  |
| REVERSE VOLTAGE                                 | 5.0    |             |     | $V_{r}$  | Ir=100μΑ  |  |  |
| AXIAL INTENSITY                                 |        | 30          |     | mcd      | If=20mA   |  |  |
| VIEWING ANGLE                                   |        | 60          |     | 2x theta |           |  |  |
| EMITTED COLOR:                                  | YELLOW |             |     |          |           |  |  |
| EPOXY LENS FINISH:                              | YELLOW | DIFFUSED    |     |          |           |  |  |

## LIMITS OF SAFE OPERATION AT 25°C

| PARAMETER                | MAX          | UNITS      |
|--------------------------|--------------|------------|
| PEAK FORWARD CURRENT*    | 150          | mA         |
| STEADY CURRENT           | 30           | mA         |
| POWER DISSIPATION        | 105          | mW         |
| DERATE FROM 25°C         | - 1.2        | mW/°C      |
| OPERATING, STORAGE TEMP. | - 40 TO + 85 | 'C         |
| SOLDERING TEMP.          | + 260        | .c         |
| 2.0mm FROM BODY          |              | 3 SEC. MAX |

\* t<10µS

UNCONTROLLED DOCUMENT

\*UNILESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MN= +DECIMAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005).

REV. PART NUMBER SSL-LX5093YD-36697

> T-5mm (T-1) LED, 585nm YELLOW LED, YELLOW DIFFUSED LENS, TAPE AND REEL.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROFERTY OF
LUMEX NO. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX
INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION
CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

 $\begin{array}{c} \underline{\text{Relablity Note}} \\ \text{Our nany years of experience data accumulation indicate that} \end{array}$ SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 US WEB: www.lumex.com TW WEB: www.lumex.com.tw

CHECKED BY: DRAWN BY: APPROVED BY: DATE: 10.31.06 PAGE: 1 OF 1 SCALE: N/A JC

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

SSL-LX5093YD-36697