

ALUMINUM ELECTROLYTIC CAPACITORS


nichicon

UCZ

Chip Type, High Reliability.
Low temperature ESR specification.



- Chip type, high temperature range, for +125°C use.
- Added ESR specification after the test at -40°C.
- Applicable to automatic mounting machine fed with carrier tape.
- Compliant to the RoHS directive (2011/65/EU, (EU)2015/863).
- AEC-Q200 compliant. Please contact us for details.



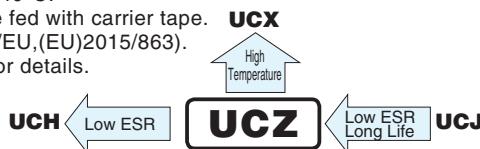


■ Specifications

Item	Performance Characteristics																																
Category Temperature Range	-40 to +125°C																																
Rated Voltage Range	10 to 100V																																
Rated Capacitance Range	10 to 3300μF																																
Capacitance Tolerance	±20% at 120Hz, 20°C																																
Leakage Current	After 2 minutes' application of rated voltage at 20°C, leakage current is not more than 0.01CV or 3μA, whichever is greater.																																
Tangent of loss angle (tan δ)	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th><th>10</th><th>16</th><th>25</th><th>35</th><th>50</th><th>63</th><th>80</th><th>100</th></tr> </thead> <tbody> <tr> <td>tan δ (MAX.)</td><td>0.30</td><td>0.23</td><td>0.18</td><td>0.16</td><td>0.16</td><td>0.12</td><td>0.12</td><td>0.10</td></tr> </tbody> </table> For capacitance of more than 1000μF, add 0.02 for every increase of 1000μF. (φ12.5 to φ18)									Rated voltage (V)	10	16	25	35	50	63	80	100	tan δ (MAX.)	0.30	0.23	0.18	0.16	0.16	0.12	0.12	0.10						
Rated voltage (V)	10	16	25	35	50	63	80	100																									
tan δ (MAX.)	0.30	0.23	0.18	0.16	0.16	0.12	0.12	0.10																									
Stability at Low Temperature	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th><th>10</th><th>16</th><th>25</th><th>35</th><th>50</th><th>63</th><th>80</th><th>100</th></tr> </thead> <tbody> <tr> <td>Impedance ratio (MAX.)</td><td>Z-40°C / Z+20°C</td><td>12</td><td>8</td><td>6</td><td>4</td><td>4</td><td>3</td><td>3</td></tr> </tbody> </table> Measurement frequency : 120Hz at 20°C									Rated voltage (V)	10	16	25	35	50	63	80	100	Impedance ratio (MAX.)	Z-40°C / Z+20°C	12	8	6	4	4	3	3						
Rated voltage (V)	10	16	25	35	50	63	80	100																									
Impedance ratio (MAX.)	Z-40°C / Z+20°C	12	8	6	4	4	3	3																									
Endurance	After continuous application of rated voltage at 125°C and then restoring down to 20°C, the readings of measurements shall meet below. <table border="1"> <tr> <td>Case size</td><td>φ6.3 × 5.8L</td><td>φ6.3 × 7.7L</td><td>φ8 to φ12.5</td><td>φ16.18 × 16.5L</td><td>φ16.18 × 21.5L</td><td></td><td></td><td></td></tr> <tr> <td>Endurance time</td><td>1000hrs.</td><td>2000hrs.</td><td>3000hrs.</td><td>3500hrs.</td><td>4000hrs.</td><td></td><td></td><td></td></tr> </table> <table border="1"> <tr> <td>Capacitance change</td><td>Within ±30% of the initial capacitance value</td></tr> <tr> <td>tan δ</td><td>300% or less than the initial specified value</td></tr> <tr> <td>Leakage current</td><td>Less than or equal to the initial specified value</td></tr> </table>									Case size	φ6.3 × 5.8L	φ6.3 × 7.7L	φ8 to φ12.5	φ16.18 × 16.5L	φ16.18 × 21.5L				Endurance time	1000hrs.	2000hrs.	3000hrs.	3500hrs.	4000hrs.				Capacitance change	Within ±30% of the initial capacitance value	tan δ	300% or less than the initial specified value	Leakage current	Less than or equal to the initial specified value
Case size	φ6.3 × 5.8L	φ6.3 × 7.7L	φ8 to φ12.5	φ16.18 × 16.5L	φ16.18 × 21.5L																												
Endurance time	1000hrs.	2000hrs.	3000hrs.	3500hrs.	4000hrs.																												
Capacitance change	Within ±30% of the initial capacitance value																																
tan δ	300% or less than the initial specified value																																
Leakage current	Less than or equal to the initial specified value																																
Shelf Life	After storing the capacitors under no load at 125°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.																																
Resistance to soldering heat	The capacitors are kept on a hot plate for 30 seconds, which is maintained at 250°C. The capacitors shall meet the characteristic requirements listed at right when they are removed from the plate and restored to 20°C.																																
Marking	Black print on the case top.																																

■ Chip Type


(φ 6.3) 【Standard】 * φ6.3 × 5.8L : The vibration structure-resistant product can't support.
φ6.3 × 7.7L : The vibration structure-resistant product is available.

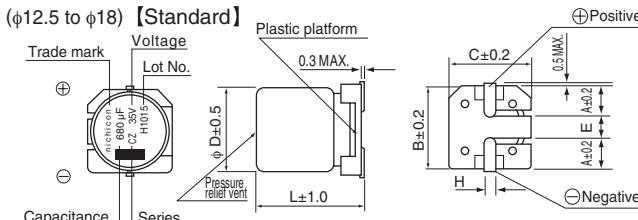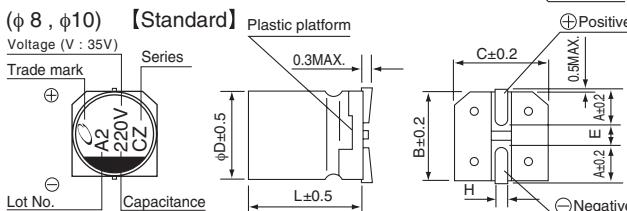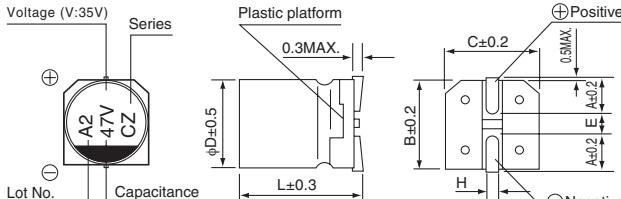


*φ12.5 to φ18 :

The vibration structure-resistant product is also available upon request, please ask for details.

Type numbering system (Example : 35V 47μF)

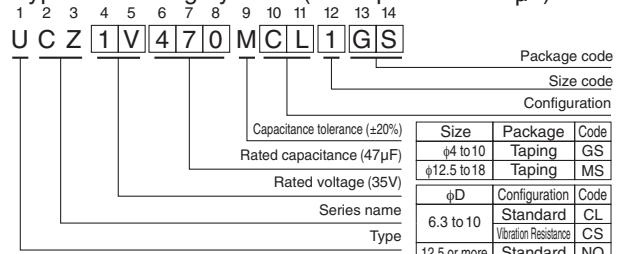

(φ 8, φ10) 【Vibration Resistance】

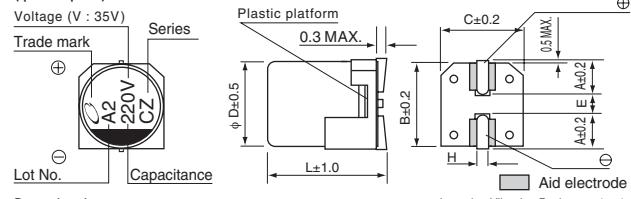

Standard

	6.3X5.8	6.3X7.7	8X10	10X10	12.5X13.5	16X16.5	16X21.5	18X16.5	18X21.5	(mm)	Vibration Resistance (mm)	
A	2.4	2.4	2.9	3.2	4.8	5.4	5.4	6.4	6.4	A	2.9	3.2
B	6.6	6.6	8.3	10.3	13.6	17.1	17.1	19.1	19.1	B	8.3	10.3
C	6.6	6.6	8.3	10.3	13.6	17.1	17.1	19.1	19.1	C	8.3	10.3
E	2.2	2.2	3.1	4.5	4	6.3	6.3	6.3	6.3	E	3.1	4.5
L	5.8	7.7	10	10	13.5	16.5	21.5	16.5	21.5	L	10	10
H	0.5 to 0.8	0.5 to 0.8	0.8 to 1.1	0.8 to 1.1	1.0 to 1.4	H	1.1 to 1.5	1.1 to 1.5				

Voltage

V	10	16	25	35	50	63	80	100
Code	A	C	E	V	H	J	K	2A

● Dimension table in next page.

ALUMINUM ELECTROLYTIC CAPACITORS

nichicon

UCZ

Dimensions

Cap. (μF)	V	10		16		25		35		50	
		Code	1A	Code	1C	Code	1E	Code	1V	Code	1H
10	100										
22	220										
33	330					6.3×5.8	1.60 24 - 69	6.3×5.8	1.60 24 - 69	6.3×7.7 0.50 5 40 197	6.3×7.7 0.50 5 40 197
47	470				6.3×5.8 1.60 24 - 69		Recommend 35V →	6.3×7.7 0.45 5 40 197	6.3×7.7 0.45 5 40 197	8×10 0.25 3.5 6 270	8×10 0.25 3.5 6 270
68	680							8×10 0.20 3 4.5 270			
100	101	Recommend 16V →		● 6.3×7.7 0.45 5 40 197 8×10 0.20 3 4.5 270		● 6.3×7.7 0.45 5 40 197 8×10 0.20 3 4.5 270		8×10 0.20 3 4.5 270		10×10 0.20 2.5 4.5 500	
220	221	8×10 0.20 3 4.5 270		8×10 0.20 3 4.5 270		● 8×10 0.20 3 4.5 270 10×10 0.15 2 3.5 500		10×10 0.15 2 3.5 500			
330	331	● 8×10 0.20 3 4.5 270 10×10 0.15 2 3.5 500		10×10 0.15 2 3.5 500		10×10 0.15 2 3.5 500					
390	391									12.5×13.5 0.100 0.44 4.0 1300	
470	471	10×10 0.15 2 3.5 500		10×10 0.15 2 3.5 500						16×16.5 0.080 0.34 2.6 2000	
560	561									16×16.5 0.080 0.34 2.6 2000	
680	681									18×16.5 0.078 0.32 2.6 2100	
820	821					12.5×13.5 0.060 0.40 3.0 1700		16×16.5 0.047 0.28 1.4 2400		18×16.5 0.078 0.32 2.6 2100	
1000	102					12.5×13.5 0.060 0.40 3.0 1700		16×16.5 0.047 0.28 1.4 2400		16×21.5 0.040 0.22 1.5 2800	
1200	122					16×16.5 0.047 0.28 1.4 1700		18×16.5 0.045 0.28 1.4 2600		18×21.5 0.038 0.20 1.5 2900	
1400	142										
1600	162					16×16.5 0.047 0.28 1.4 2400		16×21.5 0.034 0.20 0.6 3000			
2200	222					18×16.5 0.045 0.23 1.3 2600		18×21.5 0.032 0.16 0.5 3250			
2700	272					16×21.5 0.034 0.20 0.6 3000					
3300	332					18×21.5 0.032 0.16 0.5 3250					

Case size
φD × L
(mm)
Initial
20°C
after
-40°C test
Initial
endurance
-40°C test
Rated
ripple
ESR(100kHz)

Cap. (μF)	V	63		80		100	
		Code	1J	Code	1K	Code	2A
10	100	6.3×7.7 2.00 100 - 60		8×10 0.75 50 - 70		8×10 0.75 50 - 70	
22	220	8×10 0.70 35 - 100		● 8×10 0.75 50 - 70 10×10 0.55 35 - 115		● 8×10 0.75 50 - 70 10×10 0.55 35 - 115	
33	330	● 8×10 0.70 35 - 100 10×10 0.50 25 - 170		● 8×10 0.75 50 - 70 10×10 0.55 35 - 115		10×10 0.55 35 - 115	
47	470	● 8×10 0.70 35 - 100 10×10 0.50 25 - 170		10×10 0.55 35 - 115			
82	820				12.5×13.5 0.28 1.9 22 700		
150	151	12.5×13.5 0.20 1.3 14 1000		12.5×13.5 0.28 1.9 14 700		16×16.5 0.19 1.4 4.8 1000	
180	181	12.5×13.5 0.20 1.3 14 1000				18×16.5 0.17 1.1 3.9 1100	
220	221	12.5×13.5 0.20 1.3 14 1000				16×21.5 0.12 0.8 2.6 1600	
270	271			16×16.5 0.19 1.4 4.8 1000			
300	301				18×21.5 0.11 0.7 2.4 1700		
330	331			18×16.5 0.17 1.1 3.9 1100			
390	391	16×16.5 0.13 0.9 4.8 1900		16×21.5 0.12 0.8 2.6 1600			
470	471	18×16.5 0.11 0.82 3.9 2000					
520	521			18×21.5 0.11 0.7 2.4 1700			
560	561	16×21.5 0.07 0.46 2.0 2500					
750	751	18×21.5 0.068 0.44 1.8 2600					

Case size
φD × L
(mm)
Initial
20°C
after
-40°C test
Initial
endurance
-40°C test
Rated
ripple
ESR(100kHz)

* Guaranteed time of ESR after endurance test

Size	Guaranteed time
φ6.3 × 5.8L	-
φ6.3 × 7.7L, φ8 × 10L	10 to 50V 2000hrs.
φ10 × 10L	63 to 100V -
φ12.5	2000hrs.
φ16, 18 × 16.5L	2000hrs.
φ16, 18 × 21.5L	3000hrs.

Max. ESR (Ω) at 20°C / -40°C 100kHz, Rated ripple Current (mA rms) at 125°C 100kHz

* : In this case, [6] will be put at 12th digit of type numbering system.

• Frequency coefficient of rated ripple current

Frequency	50Hz	120Hz	300Hz	1kHz	10kHz or more
Coefficient	0.35	0.50	0.64	0.83	1.00

- Taping specifications are given in page 23.
- Recommended land size, soldering by reflow are given in page 18, 19.
- Please refer to page 3 for the minimum order quantity.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Nichicon:

UCZ1A221MCL1GS	UCZ1A331MCL1GS	UCZ1A331MCL6GS	UCZ1A471MCL1GS	UCZ1C101MCL1GS
UCZ1C101MCL6GS	UCZ1C221MCL1GS	UCZ1C331MCL1GS	UCZ1C471MCL1GS	UCZ1E101MCL1GS
UCZ1E221MCL1GS	UCZ1E331MCL1GS	UCZ1V101MCL1GS	UCZ1V221MCL1GS	UCZ1V470MCL1GS
UCZ1V470MCL6GS	UCZ1V680MCL1GS	UCZ2A220MCS6GS	UCZ1A471MCS1GS	UCZ1E221MCS6GS
UCZ1E101MCS6GS	UCZ1A221MCS1GS	UCZ1H470MCS1GS	UCZ1J470MCS6GS	UCZ1H330MCS6GS
UCZ1V220MCL1GS	UCZ1K220MCL1GS	UCZ1V100MCL1GS	UCZ2A100MCS1GS	UCZ1K470MCS1GS
UCZ1J470MCS1GS	UCZ2A220MCS1GS	UCZ1V101MCS1GS	UCZ1J330MCS6GS	UCZ1H220MCS1GS
UCZ1H330MCS1GS	UCZ1C331MCS1GS	UCZ1H101MCS1GS	UCZ1H330MCL1GS	UCZ1C471MCS1GS
UCZ1K330MCS6GS	UCZ1J470MCL1GS	UCZ1J330MCL6GS	UCZ2A220MCL1GS	UCZ1V680MCS1GS
UCZ1K100MCS1GS	UCZ1K220MCS1GS	UCZ1J100MCL1GS	UCZ2A330MCS1GS	UCZ1V221MCS1GS
UCZ1E101MCS1GS	UCZ1A331MCS6GS	UCZ1H470MCL6GS	UCZ1C101MCS6GS	UCZ1E221MCS1GS
UCZ1E330MCL1GS	UCZ1C101MCS1GS	UCZ1J220MCL1GS	UCZ1H100MCL1GS	UCZ1H470MCS6GS
UCZ1K330MCL1GS	UCZ1V330MCS1GS	UCZ1K220MCL6GS	UCZ1K330MCS1GS	UCZ1V470MCS6GS
UCZ1V330MCL1GS	UCZ1C221MCS1GS	UCZ1H101MCL1GS	UCZ1E331MCS1GS	UCZ1K220MCS6GS
UCZ1J100MCS1GS	UCZ1J330MCL1GS	UCZ1J220MCS1GS	UCZ1H220MCL1GS	UCZ1V470MCS1GS
UCZ1K330MCL6GS	UCZ1J330MCS1GS	UCZ2A100MCL1GS	UCZ1C470MCL1GS	UCZ1H330MCL6GS
UCZ1A331MCS1GS	UCZ1E221MCL6GS	UCZ1K100MCL1GS	UCZ1K470MCL1GS	UCZ1J470MCL6GS
UCZ1H470MCL1GS	UCZ2A330MCL1GS	UCZ2A220MCL6GS	UCZ1E101MCL6GS	UCZ1J471MNQ1MS
UCZ1H821MNQ1MS	UCZ1K521MNQ1MS	UCZ1E821MNQ1MS	UCZ1E222MNQ1MS	UCZ1K331MNQ1MS
UCZ1J181MNQ1MS	UCZ1V681MNQ1MS	UCZ1V122MNQ1MS	UCZ1V222MNQ1MS	UCZ1V471MNQ1MS