

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0761651304

Status:


Active

Overview:

Impact Backplane Connector and Cable Assembly System

Description:

Impact 100 Ohm 3 Pair Vertical Backplane Header, Unguided, Open Endwall, 6 Columns, 54 Circuits, Pin Length 4.90mm, Plated Through Hole Dimension 0.46mm, Lead-Free

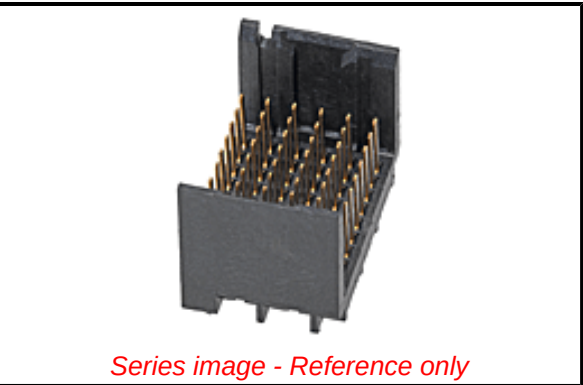

Series image - Reference only

Documents:

3D Model

Drawing (PDF)

Product Specification PS-76060-999-001 (PDF)

Application Specification AS-76060-990-001 (PDF)

Application Specification AS-76060-9999-001 (PDF)

Packaging Specification PK-70873-758-001 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification	
UL	E29179
General	
Product Family	Backplane Connectors
Series	76165
Application	Conventional, Mezzanine
Application Tooling Documents	TM-622018799
Component Type	PCB Header
Overview	Impact Backplane Connector and Cable Assembly System
Product Name	Impact
UPC	887191144115
Physical	
Circuits (Loaded)	54
Circuits (maximum)	54
Color - Resin	Black
Durability (mating cycles max)	200
First Mate / Last Break	No
Flammability	94V-0
Guide to Mating Part	No
Keying to Mating Part	None
Material - Metal	High Performance Alloy (HPA)
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	1.339/g
Number of Columns	6
Number of Pairs	3
Number of Rows	9
Orientation	Vertical
PC Tail Length	1.40mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.00mm
Packaging Type	Tray
Pitch - Mating Interface	1.90mm
Pitch - Termination Interface	1.90mm
Plating min - Mating	0.762µm
Polarized to PCB	No
Stackable	No
Temperature Range - Operating	-55° to +85°C
Termination Interface: Style	Through Hole - Compliant Pin

EU ELV

Not Relevant

EU RoHS

Compliant

China RoHS

REACH SVHC

Not Contained Per -

ED/71/2019 (16 July

2019)

Halogen-Free

Status

Low-Halogen

For more information, please visit

Contact US

China ROHS

Green Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

Search Parts in this Series

76165 Series

Mates With

76170 Impact 100 Ohm Daughtercard

Use With

75234 Backplane Free Standing Guide Pin

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description	Product #
Backplane Insertion Tool for Signal Contact	621005800
Backplane Header Removal Tool for GbX U-Series, GbX I-Trac, Impact, or Z-PACK TinMan	621009610

		Backplane Press-In <u>622018781</u> Tool
Electrical		
Current - Maximum per Contact	0.75A	
Data Rate	25.0 Gbps	
Impedance	100Ω	
Shield Type	N/A	
Shielded	No	
Voltage - Maximum	30V AC (RMS)/DC	
Solder Process Data		
Lead-freeProcess Capability	N/A	
Material Info		
Reference - Drawing Numbers		
Application Specification	AS-76060-990-001, AS-76060-9999-001	
Packaging Specification	PK-70873-758-001	
Product Specification	PS-76060-999-001	
Sales Drawing	SD-76165-001-001	
Symbol/Footprint Data	SYM-76165-1304	

This document was generated on 09/15/2019

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[76165-1304](#)