


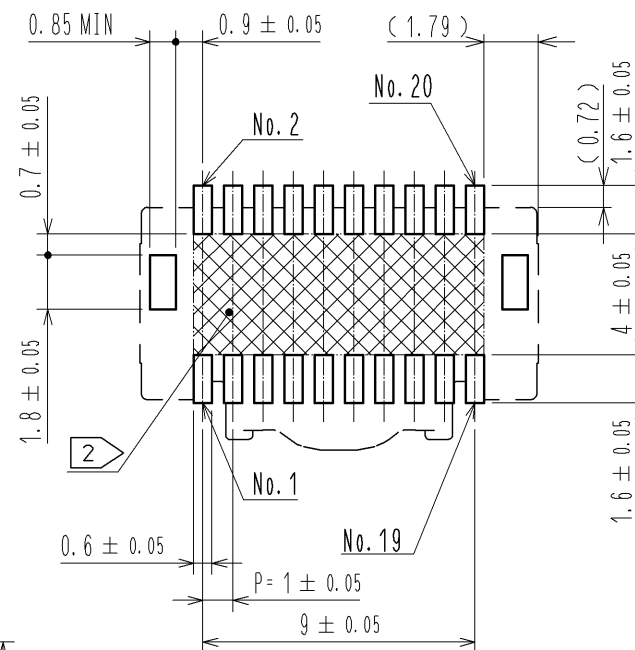



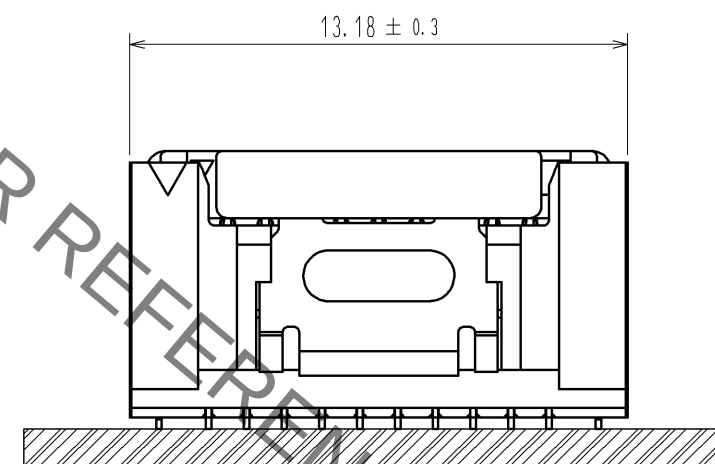

MATING FIGURE (5 : 1)

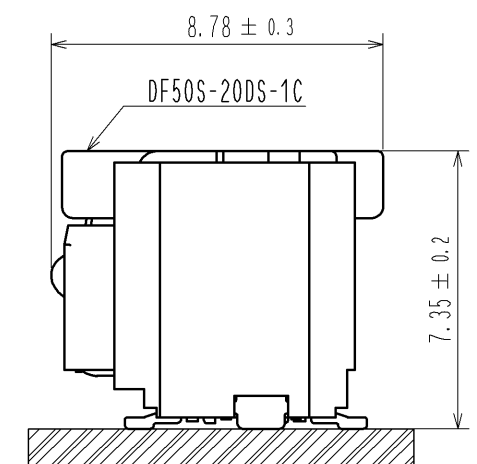

THICKNESS : 0.1mm

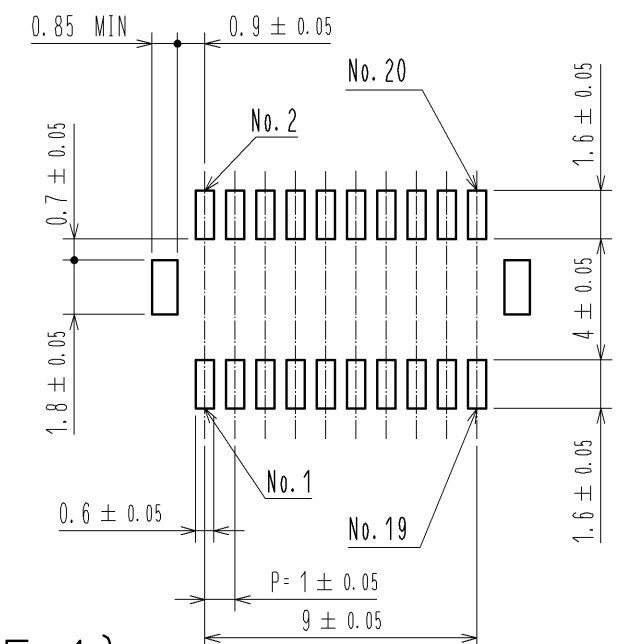

- NOTES 1. LEAD CO-PLANARITY SHALL BE 0.1 mm MAX.
2.  AREA INDICATED MUST BE FREE OF CONDUCTIVE TRACES OR THE CONDUCTIVE TRACES MUST BE COVERED BY RESIST FILM.
3. PLEASE CONSULT HIROSE WHEN THE PRODUCT IS MOUNTED TO FPC.

3	BRASS	CONTACT AREA : Au PLATING 0.05 μ m MIN. LEAD AREA : Au PLATING 0.05 μ m MIN. UNDERPLATING : Ni PLATING 1 μ m MIN.	8	PS	REEL. BLACK
2	BRASS	CONTACT AREA : Au PLATING 0.05 μ m MIN. LEAD AREA : Au PLATING 0.05 μ m MIN. UNDERPLATING : Ni PLATING 1 μ m MIN.	7	POLYESTER	CLEAR
			6	PS	CLEAR
			5	STANLESS STEEL	-
			4	BRASS	SURFACE : Sn PLATING 1 μ m MIN. UNDERPLATING : Ni PLATING 0.5 μ m MIN.
1	LCP	NATURAL. UL94V-0			
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS

UNITS mm		SCALE FREE		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
HIROSE ELECTRIC CO., LTD.		APPROVED : KI. AKIYAMA	14. 10. 17	DRAWING NO. EDC3-339519-04				
		CHECED : TS. FUKUSHIMA	14. 10. 17	PART NO. DF50-20DP-1V(61)				
		DESIGNED : HT. SATO	14. 10. 17	CODE NO. CL665-0019-3-61				
		DRAWN : MI. SAKIMURA	14. 10. 16	1/2				

