

PHYSICAL PROPERTIES:  
HOUSING MATERIAL: THERMOPLASTIC, PC  
FLAMABILITY: UL94V-0  
COLOR: BLACK

TERMINAL:  
TERMINALS: BRASS, TIN PLATED  
SCREWS: 6-32 STEEL, NICKEL PLATED

MECHANICAL:  
PITCH: .437  
WIRE RANGE: 14-22 AWG  
RECOMMENDED TIGHTENING TORQUE: 12IN-LB

ELECTRICAL PROPERTIES:  
MAX CURRENT: 25A  
OPERATING VOLTAGE: 300V

ENVIRONMENTAL PROPERTIES:  
OPERATING TEMP: -40°C TO 120°C

- 1


SEE FIGURE.
- 2

PRELIMINARY PART NUMBER.
- 3



STAINLESS STEEL SCREWS.
- 4


WHITE INK STAMP.
- 5

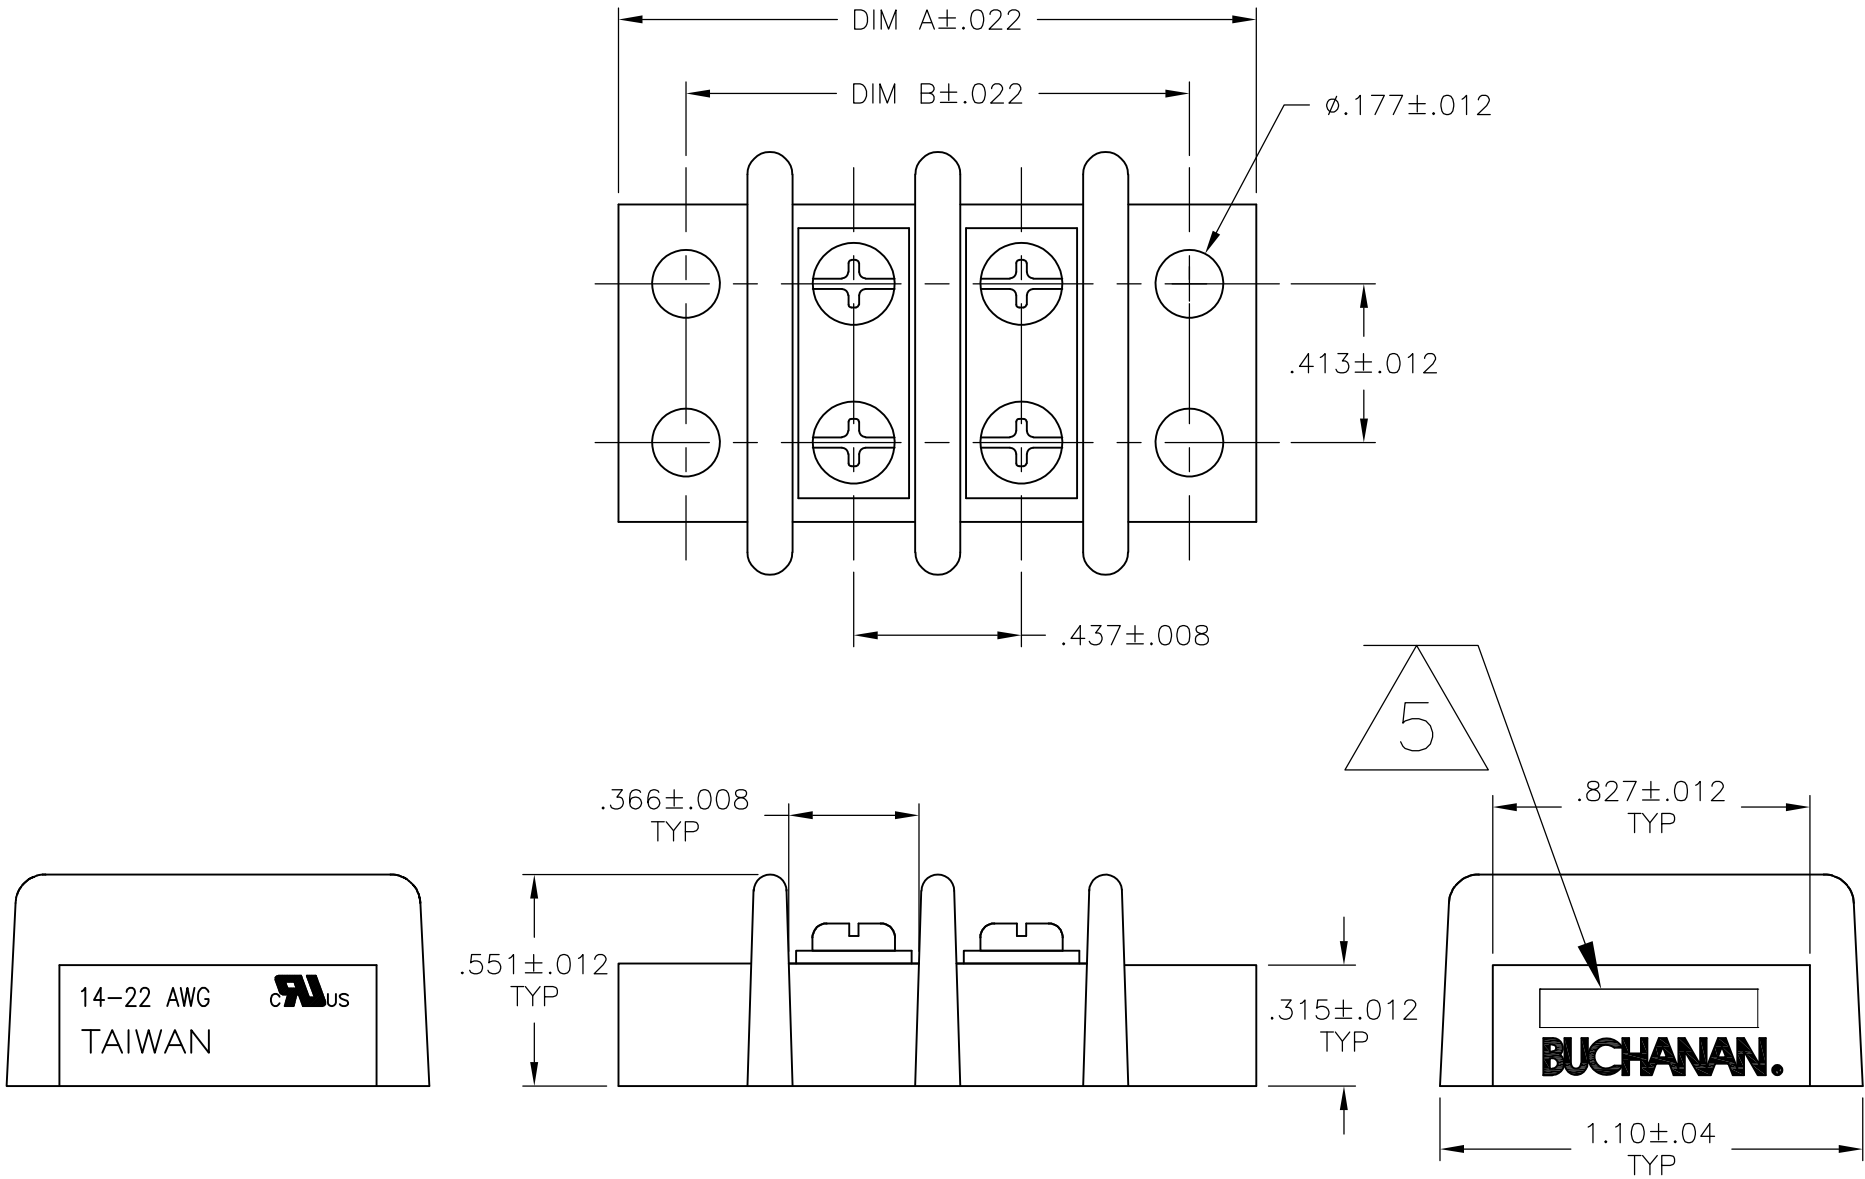


TE CONNECTIVITY LOGO LOCATED APPROXIMATE AREA.



	5.646	5.992	12	4-1546670-2
	9.142	9.488	20	2-1546670-0
	8.705	9.051	19	1-1546670-9
2	8.268	8.614	18	3-1546670-0
	8.268	8.614	18	1-1546670-8
	7.831	8.177	17	1-1546670-7
	7.394	7.740	16	1-1546670-6
	6.957	7.303	15	1-1546670-5
	6.520	6.866	14	1-1546670-4
	6.083	6.429	13	1-1546670-3
	5.646	5.992	12	1-1546670-2
	5.209	5.555	11	1-1546670-1
4	4.772	5.118	10	4-1546670-3
2	4.772	5.118	10	3-1546670-8
	4.772	5.118	10	1-1546670-0
2	4.335	4.681	9	3-1546670-5
2	4.335	4.681	9	3-1546670-2
	4.335	4.681	9	1546670-9
1	3.898	4.244	8	4-1546670-1
3	3.898	4.244	8	3-1546670-6
2	3.898	4.244	8	3-1546670-4
2	3.898	4.244	8	3-1546670-3
	3.898	4.244	8	1546670-8
	3.461	3.807	7	1546670-7
1	3.024	3.370	6	3-1546670-1
	3.024	3.370	6	1546670-6
1	2.587	2.933	5	2-1546670-8
1	2.587	2.933	5	2-1546670-7
	2.587	2.933	5	1546670-5
2	2.496	2.933	4	3-1546670-9
1	2.150	2.496	4	2-1546670-9
	2.150	2.496	4	1546670-4
	1.713	2.059	3	1546670-3
	1.276	1.622	2	1546670-2
	DIM B	DIM A	NO OF POS	PART NUMBER

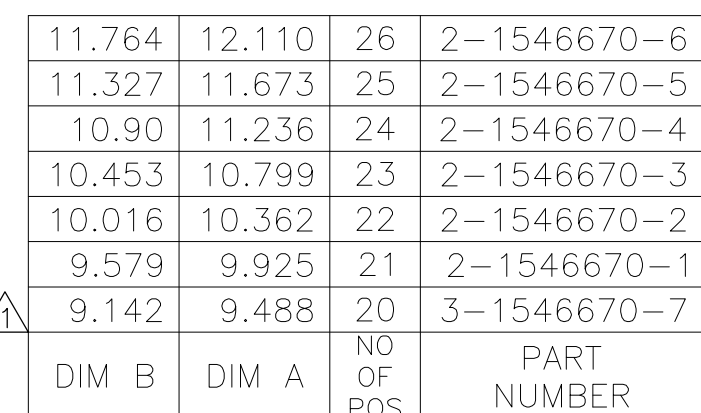THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHEGEL	4/4/03	 TE Connectivity															
		CHK C RICHARD	4/4/03																
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME		DOUBLE ROW BARRIER STRIP W/ BINDING HD SCREW, .437 SPACING													
		APVD C RICHARD	4/4/03																
		PRODUCT SPEC		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO									
		—																	
		APPLICATION SPEC																	
		—																	
MATERIAL		FINISH		WEIGHT		—		A2		00779		C=1546670		—					
				CUSTOMER DRAWING				SCALE		NTS		SHEET		1 of 3		REV		K18	





THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHEGEL	4/4/03	 TE Connectivity					
		CHK C RICHARD	4/4/03						
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:  0 PLC ± - 1 PLC ± - 2 PLC ± .01 3 PLC ± .005 4 PLC ± - ANGLES ± 3°	APVD C RICHARD	4/4/03	NAME  DOUBLE ROW BARRIER STRIP W/ BINDING HD SCREW, .437 SPACING					
		PRODUCT SPEC —							
		APPLICATION SPEC —		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO		
		MATERIAL —		FINISH —		WEIGHT —	A2	00779	 1546670
CUSTOMER DRAWING				SCALE	NTS	SHEET	2 of 3	REV	K18

LOC	DIST	REVISIONS					
FT	0	P	LTR	DESCRIPTION	DATE	DWN	APVD
			—	SEE SHEET 1	—	—	—

D


DOUBLE SIDED, DOUBLE HOLE  
FLAT QC TAB, QTY 9.

JUMPER, QTY 1

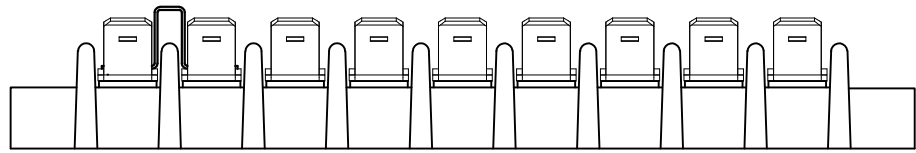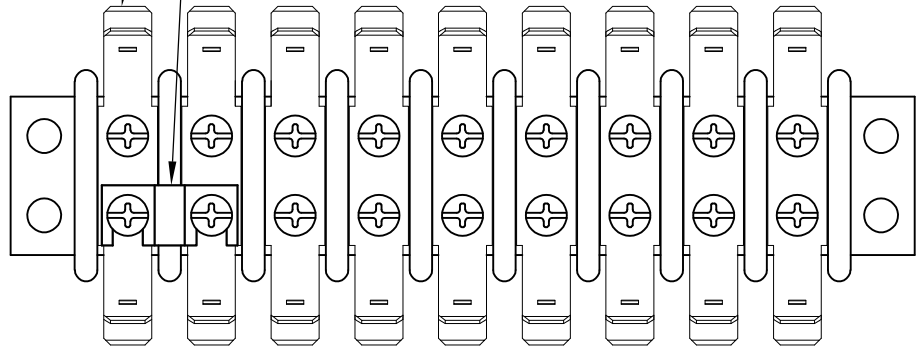


3-1546670-5

DOUBLE SIDED, DOUBLE HOLE  
45° QC TAB, QTY 9

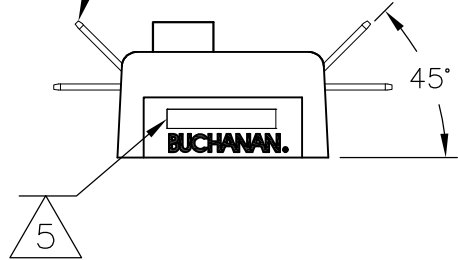


C

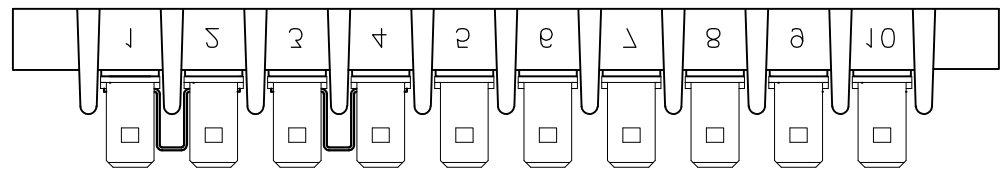


SINGLE SIDED, DOUBLE HOLE  
45° QC TAB, QTY 10

SINGLE SIDED, DOUBLE HOLE  
90° QC TAB, QTY 10

JUMPER, QTY 4

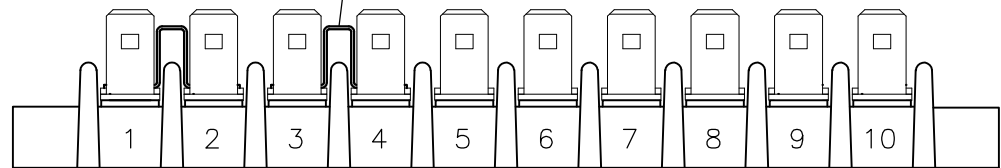


4-1546670-3

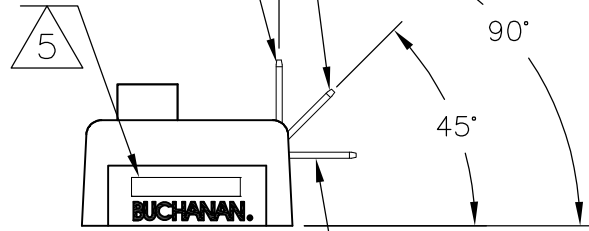


SINGLE SIDED, DOUBLE HOLE  
FLAT QC TAB, QTY 10


B

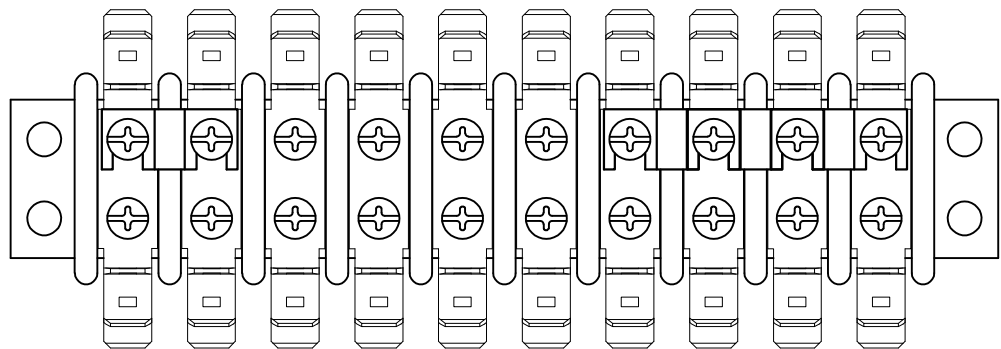



3-1546670-8

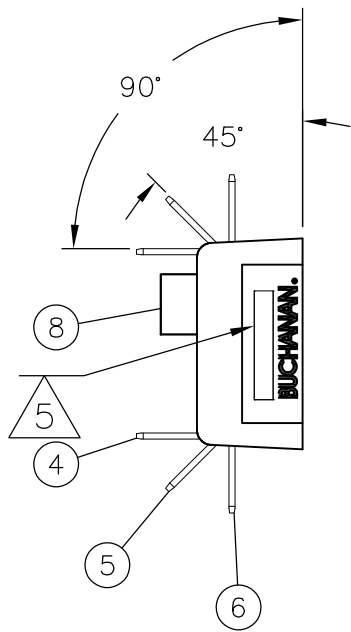


A

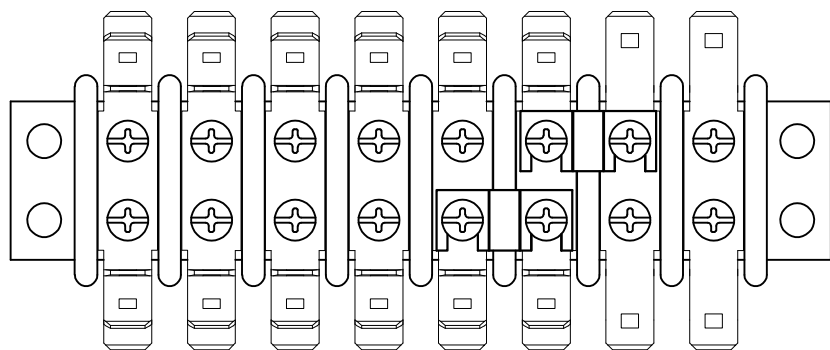



4-1546670-1

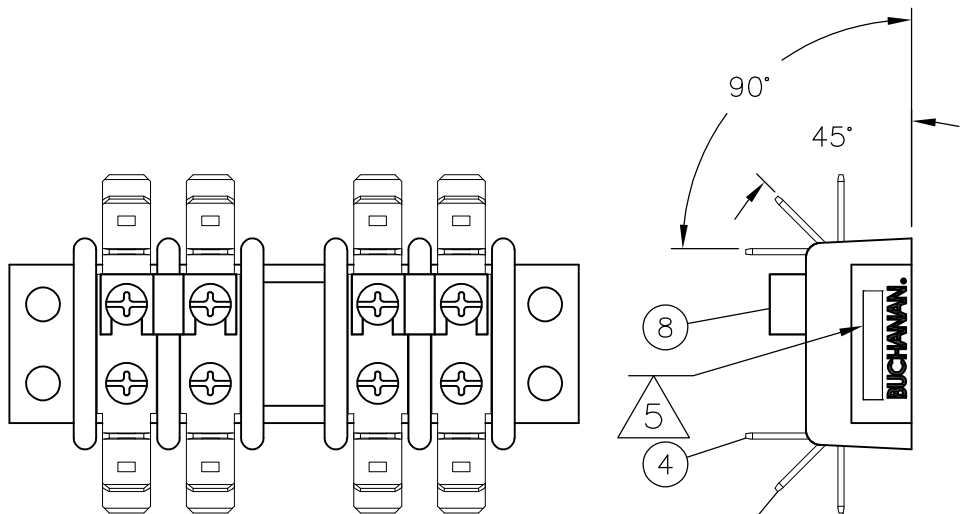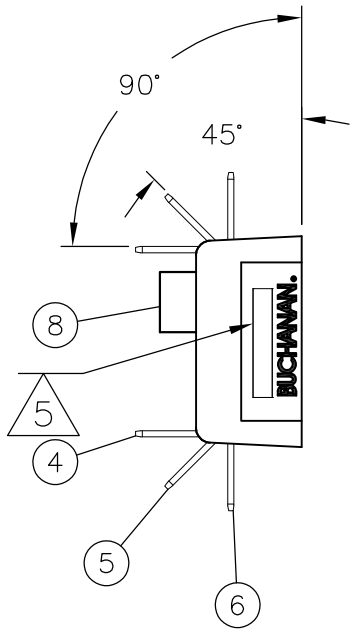

3-1546670-9

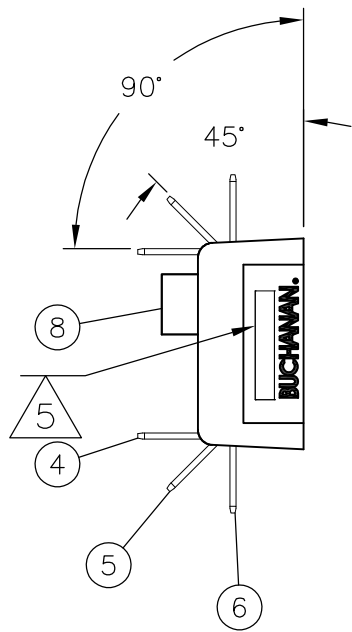

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHEGEL 4/4/03		 TE Connectivity	
		CHK C RICHARD 4/4/03			
		APVD C RICHARD 4/4/03			
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC ± -		DOUBLE ROW BARRIER STRIP W/ BINDING HD SCREW, .437 SPACING	
		1 PLC ± -			
		2 PLC ± .01			
		3 PLC ± .005			
4 PLC ± -		PRODUCT SPEC			
MATERIAL		FINISH		APPLICATION SPEC	
				—	
		WEIGHT		—	
		CUSTOMER DRAWING		SIZE	
				CAGE CODE	
				DRAWING NO	
				RESTRICTED TO	
				A2 00779 C=1546670	
				SCALE	
				SHEET	
				REV	
				NTS 3 of 3 K18	

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-1546670-2](#) [2-1546670-5](#) [3-1546670-4](#) [4-1546670-1](#)