

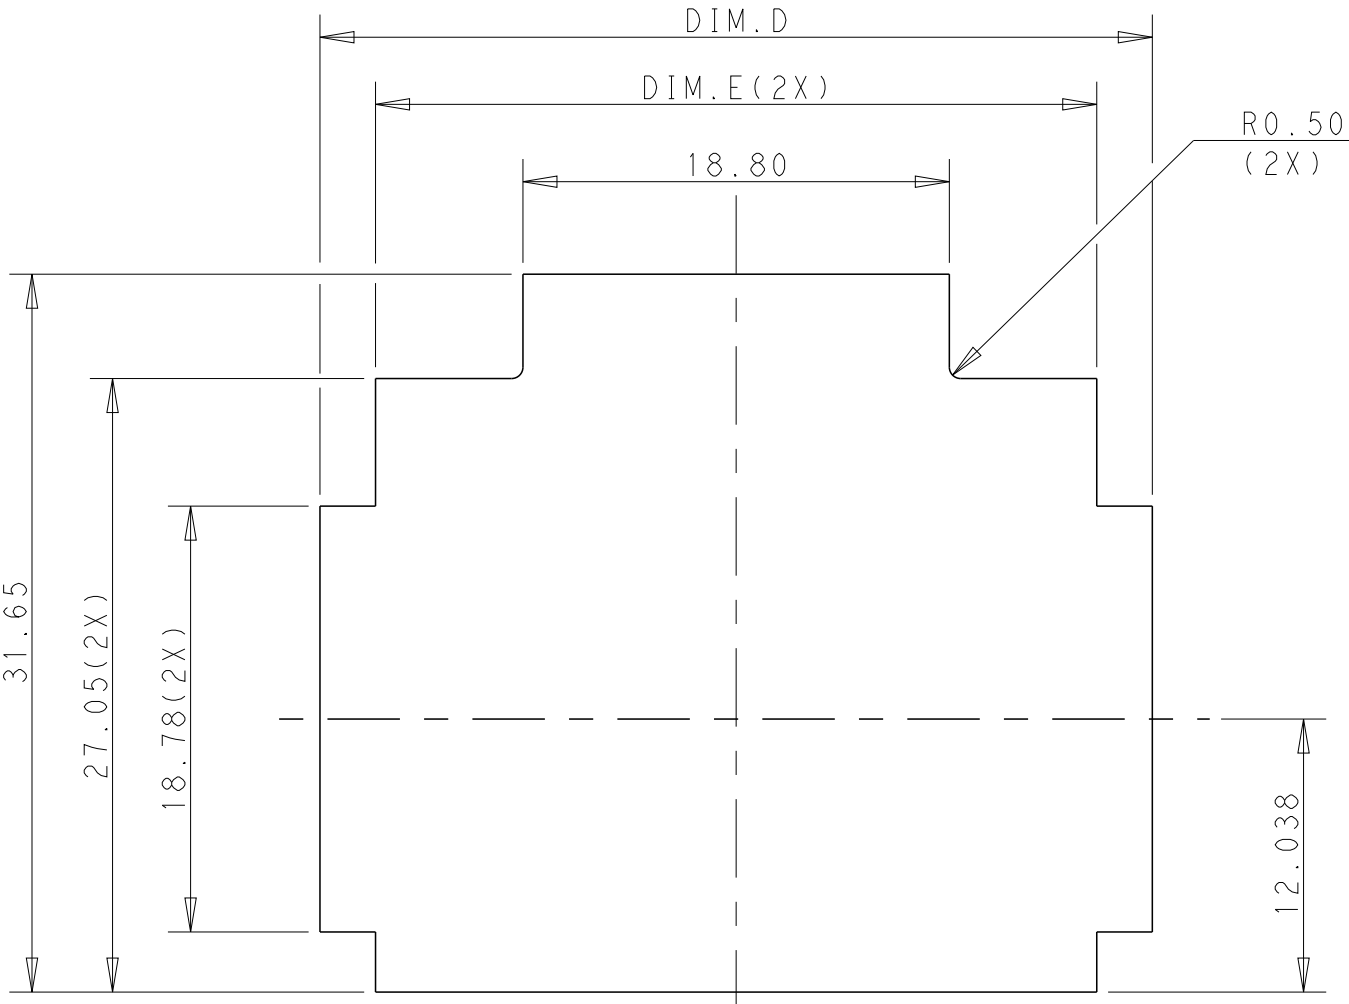






REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	C	REVISED PER ECR-16-003314	16JUL2016	BW	GJ

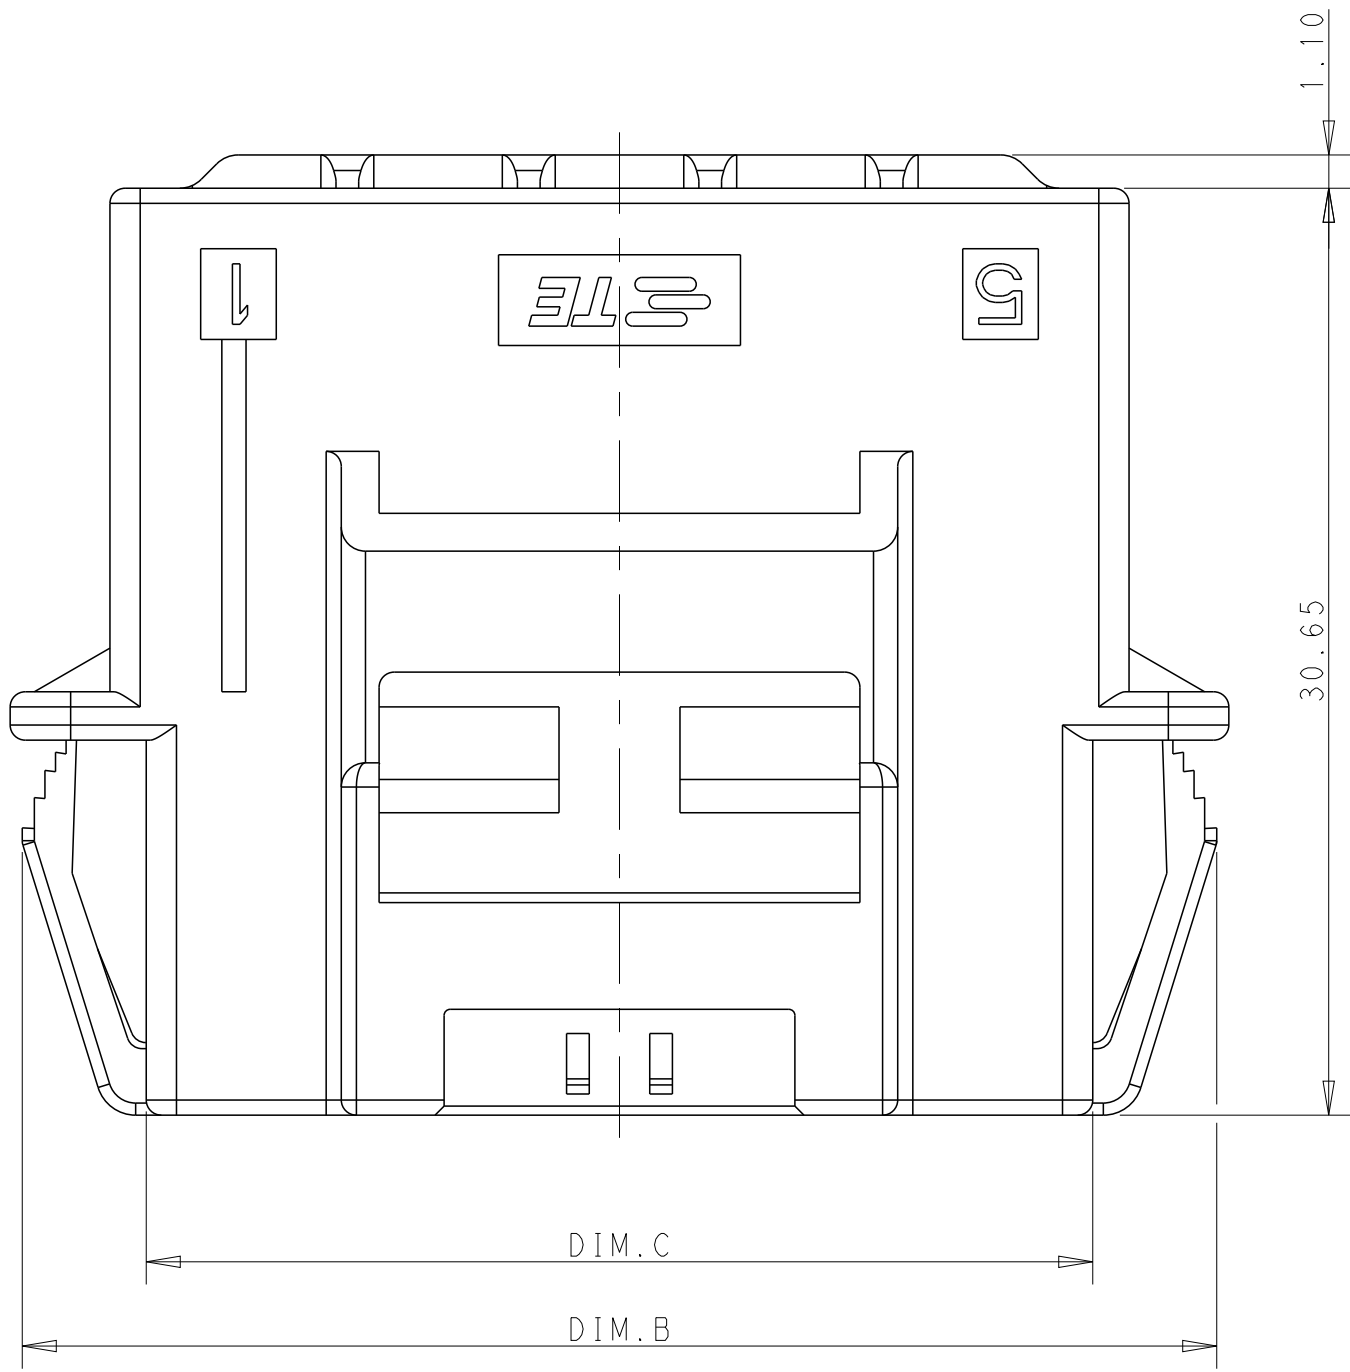

RECOMMENDED PANEL OPENING DEMENSIONS
FOR CAP HOUSING 3*5 AND 3*4 POSITIONS
(TOLERANCE: ±0.15mm)

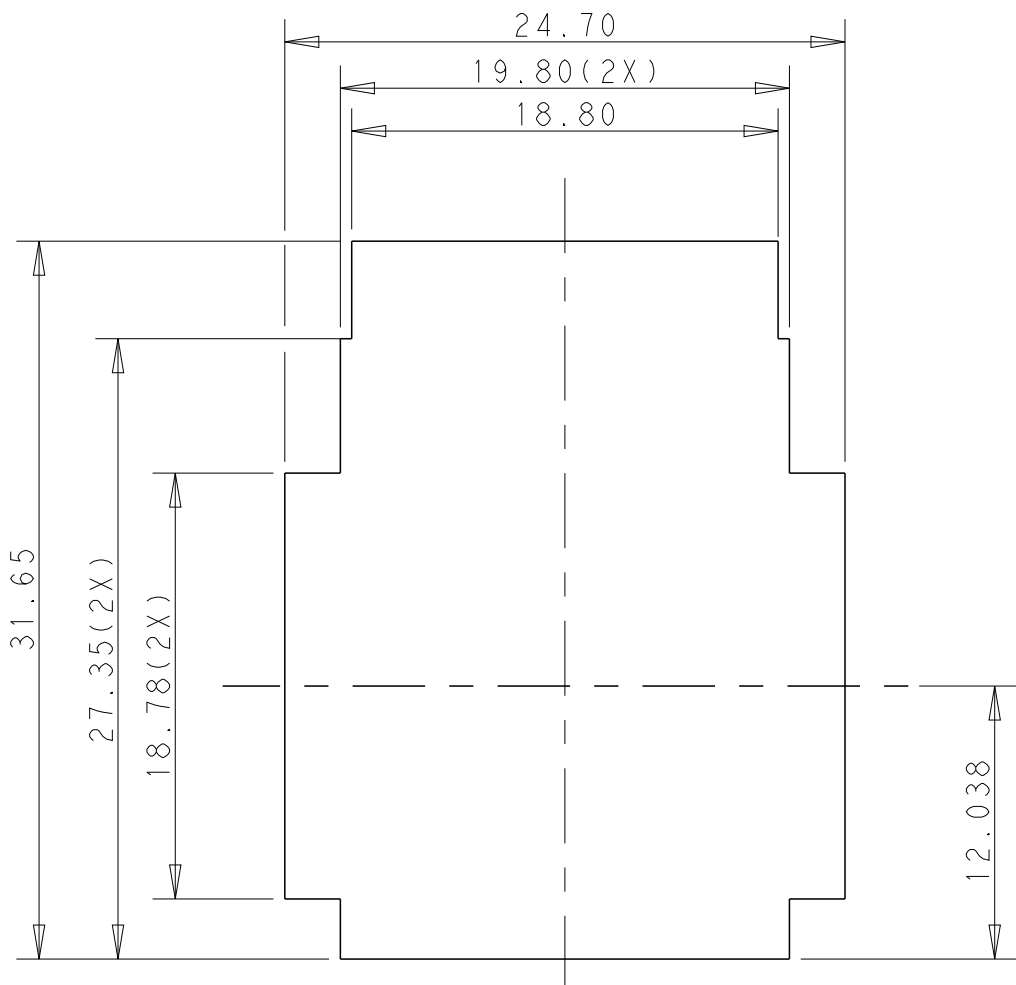

RECOMMENDED PANEL OPENING DEMENSIONS
FOR CAP HOUSING 3*3 POSITION
(TOLERANCE: ±0.15mm)

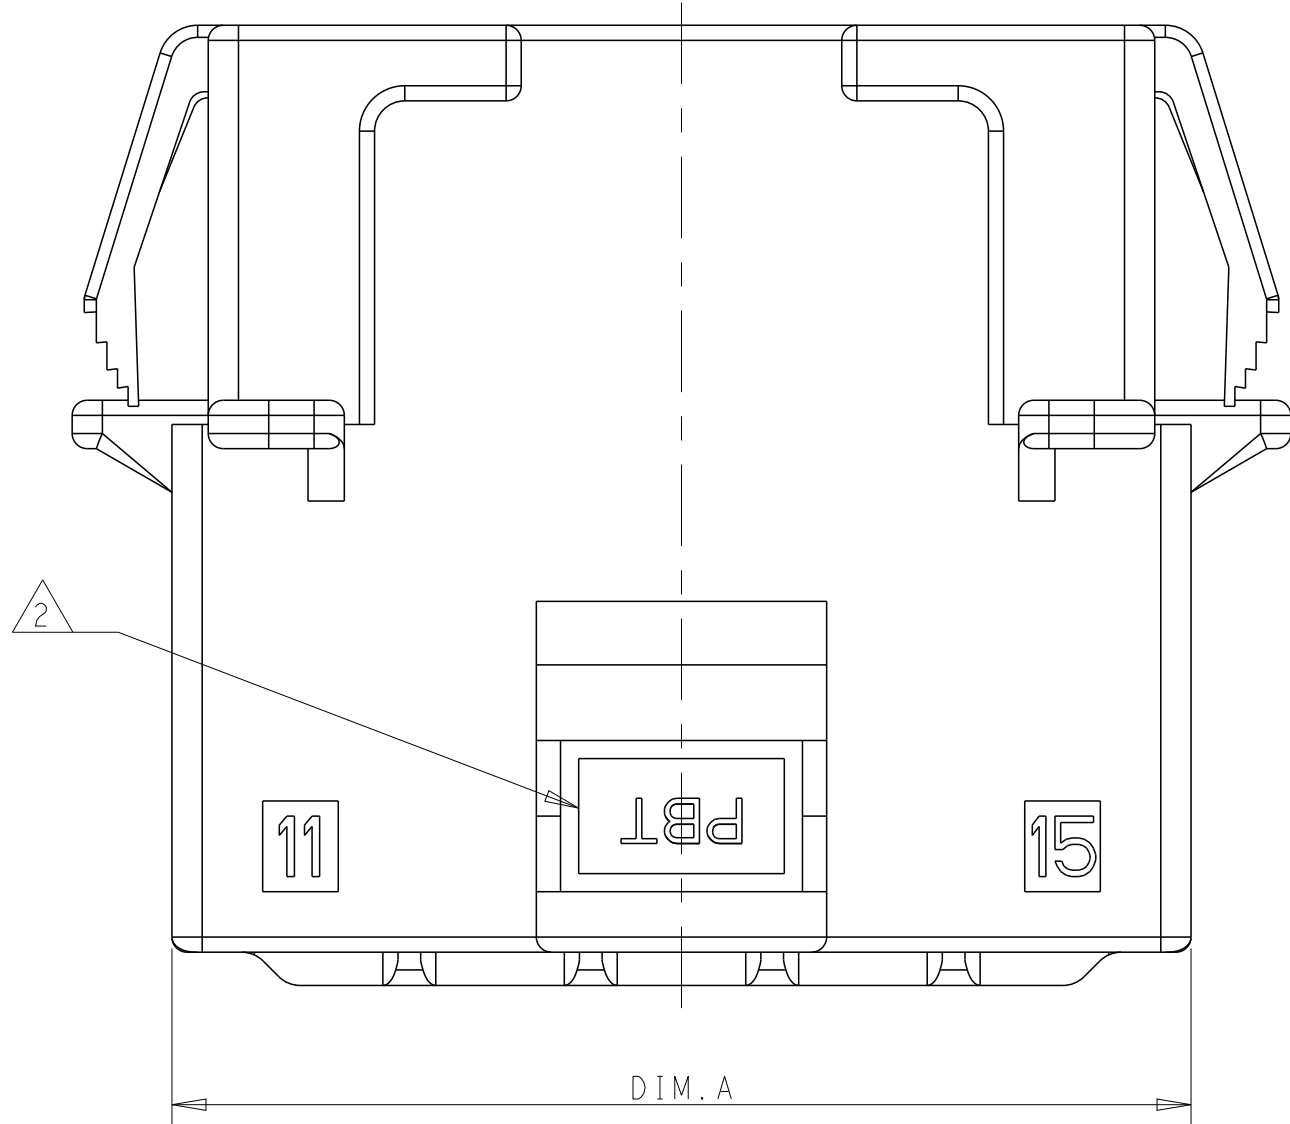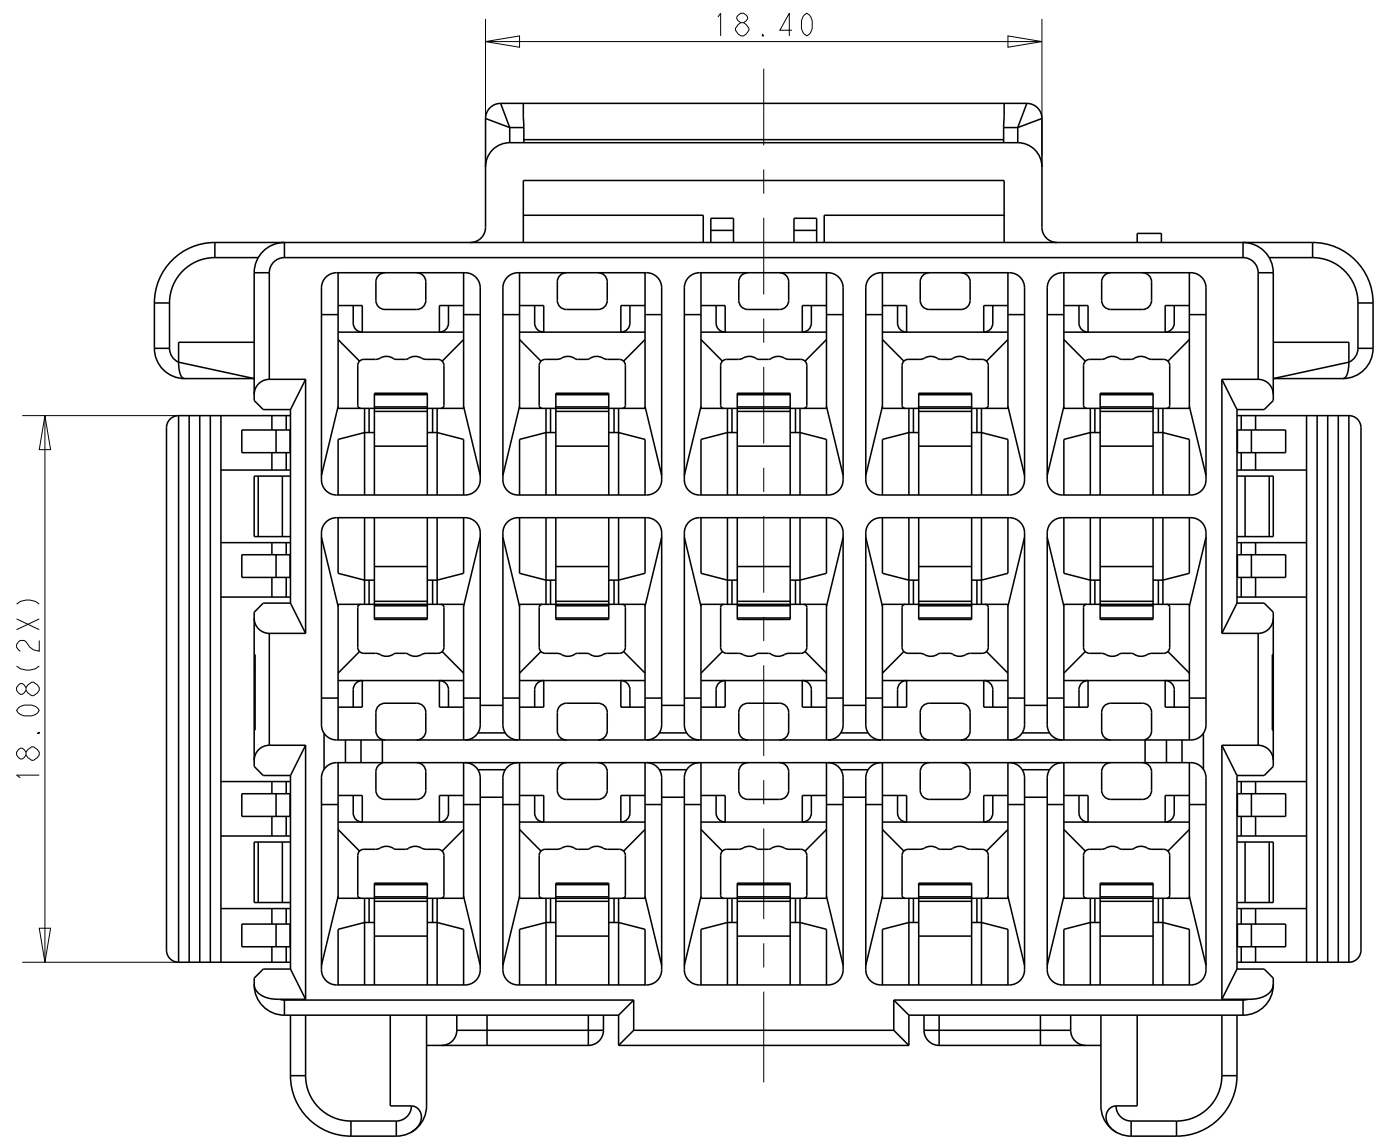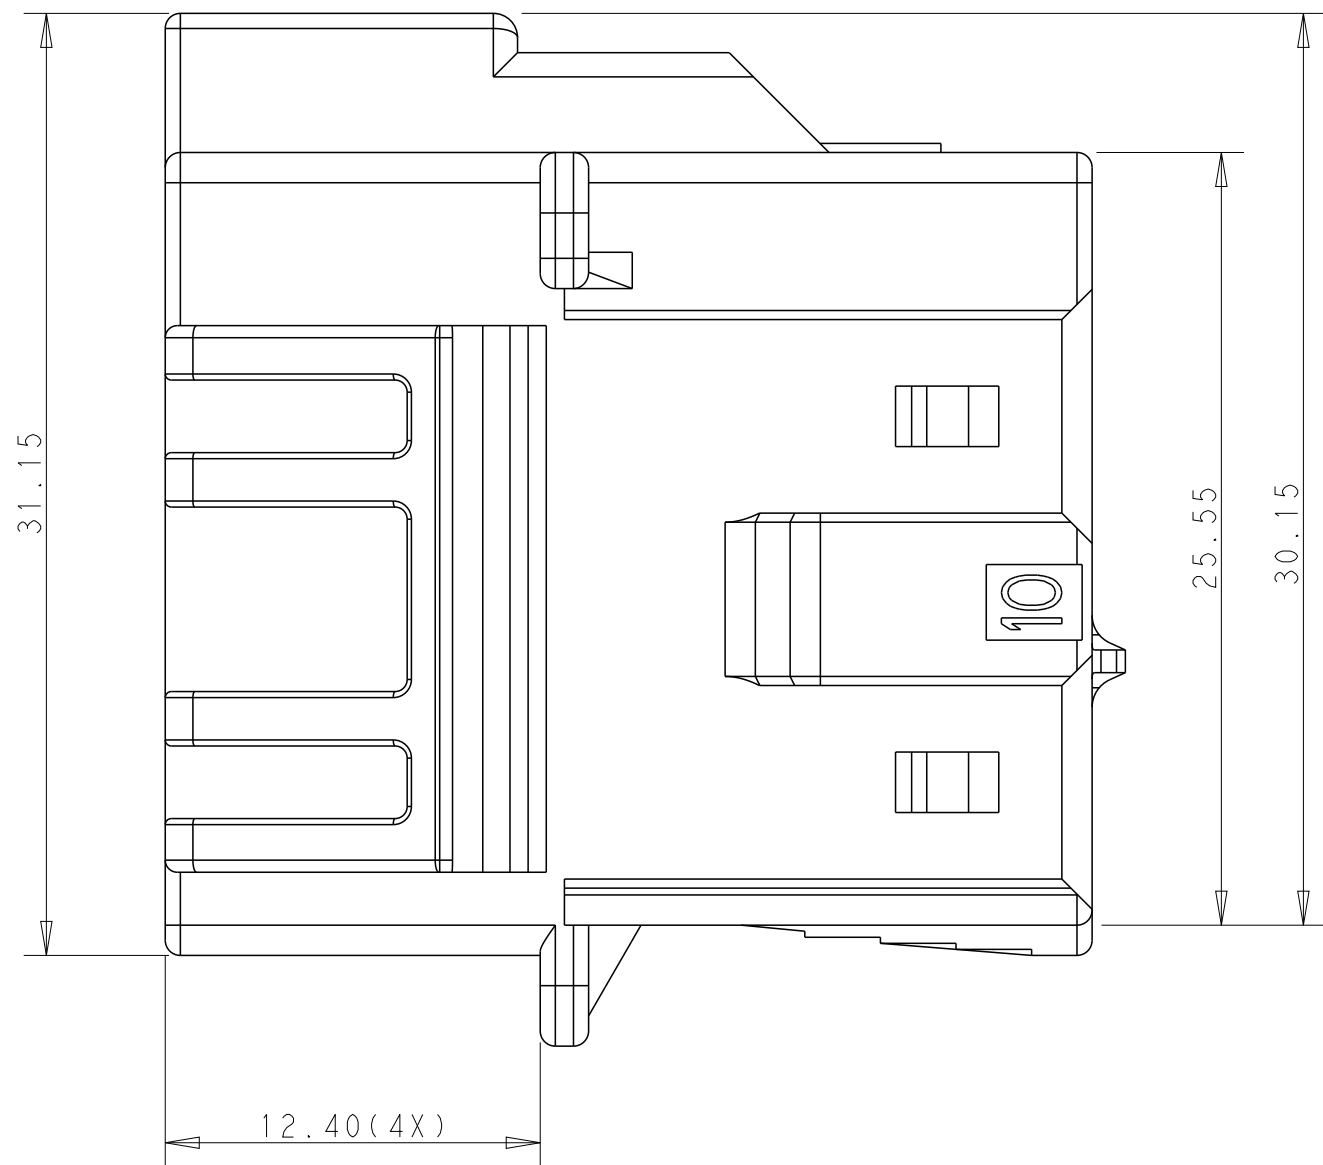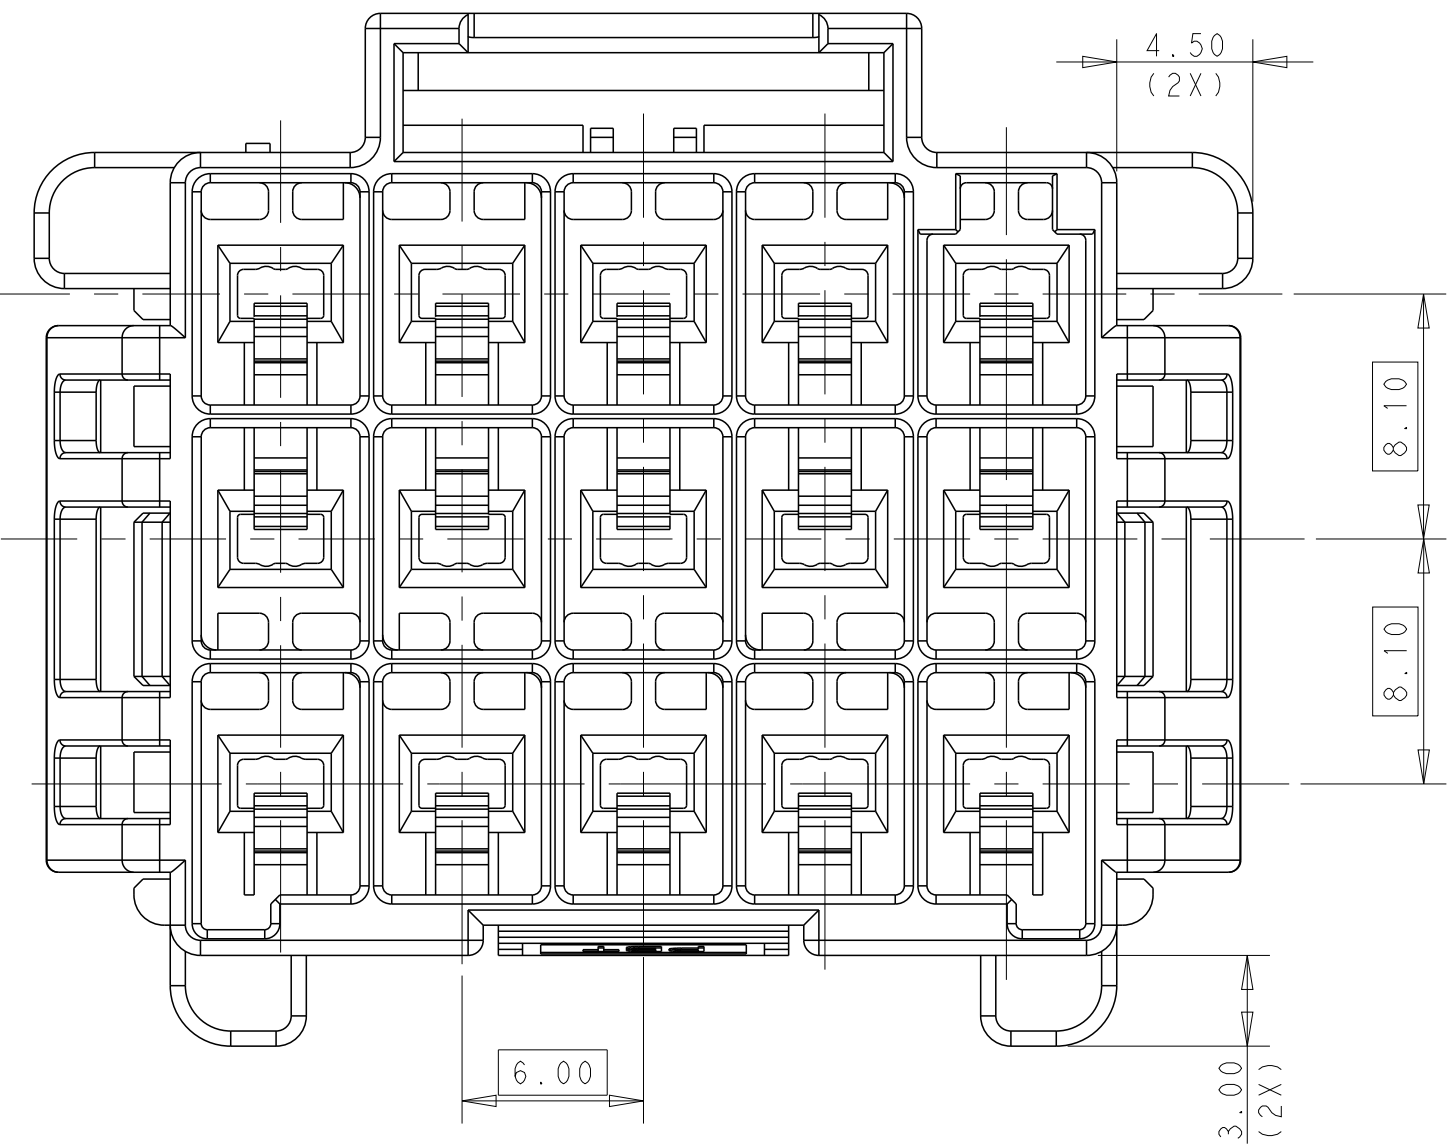







- 1 MATERIAL:
LEVEL 1:PBT, STANDARD TEMPERATURE 105°C
KEY A:NATURAL; KEY B:PURPLE; KEY C:BLUE; KEY D:YELLOW

LEVEL 2:NYLON, HIGH TEMPERATURE 150°C
KEY A:LIGHT GREY; KEY B:RED; KEY C:BLACK; KEY D:NATURAL
- 2 MATERIAL MARK:
LEVEL 1:PBT, LEVEL 2:HDT
- 3 APPLICABLE CONTACT P/N
TAB CONTACT:1971238/1971780/82/84/86/88-*,2238067-*
- 4 MATING CONN, P/N
PLUG HSG:*-1971876-*,
TPA DOUBLE ROW:*-1971778-*,SINGLE ROW:*-1971777-*
- 5 RECOMMENDED PANEL THICKNESS:1.0-2.0mm
- 6 THIS PRODUCT HAS NOT COMPLETED VALIDATION TESTING

POS	A	B	C	D	E
3*5	33.70	39.5	31.30	36.70	31.80
3*4	27.70	33.5	25.30	30.70	25.80
3*3	21.70	27.5	19.30		

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN TOMMY WU 06JUL2012	TE Connectivity NAME CAP HOUSING, PANEL MOUNT,TRIPLE ROW POWER TRIPLE LOCK			
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ±0.35 2 PLC ±0.25 3 PLC ± 4 PLC ± ANGLES ± FINISH -	CHK HAPYE WU 06JUL2012				
		APVD YUHONG MAO 06JUL2012				
		PRODUCT SPEC 108-106118				
MATERIAL	1	APPLICATION SPEC 114-106118	SIZE A100779	CAGE CODE C=1971875	DRAWING NO -	RESTRICTED TO -
		WEIGHT -				
Customer Drawing		SCALE -	SHEET 1	OF 2	REV C	







REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

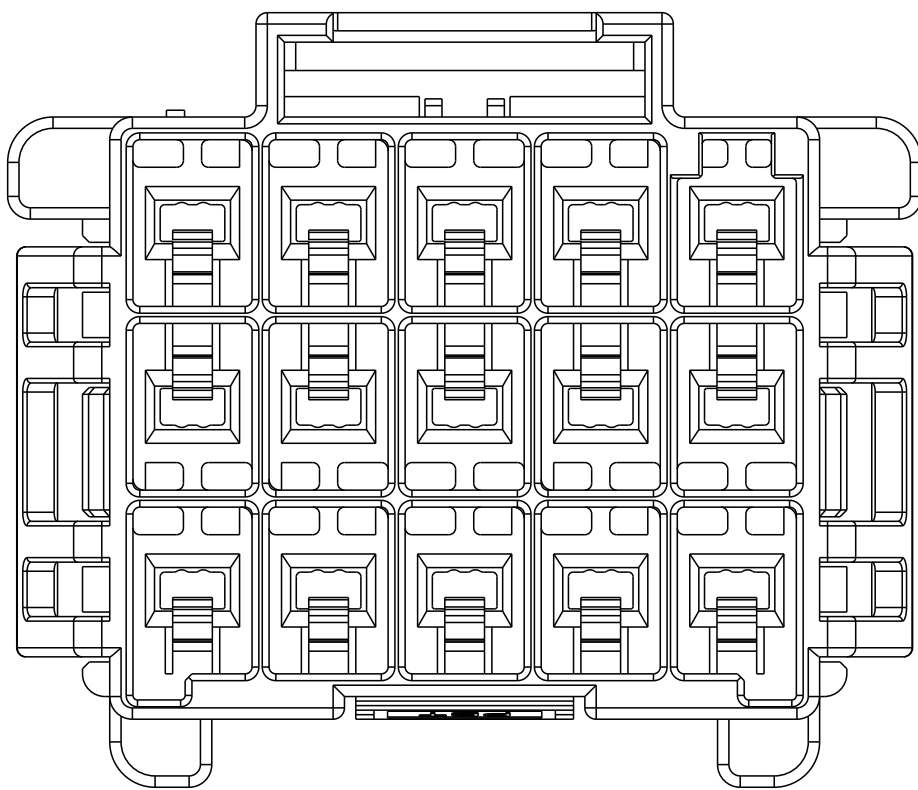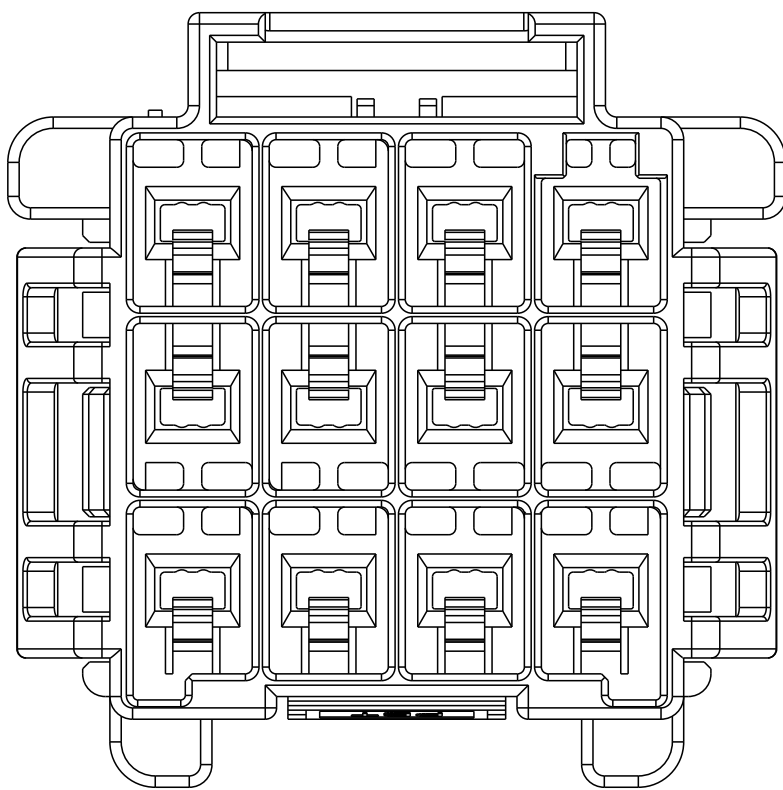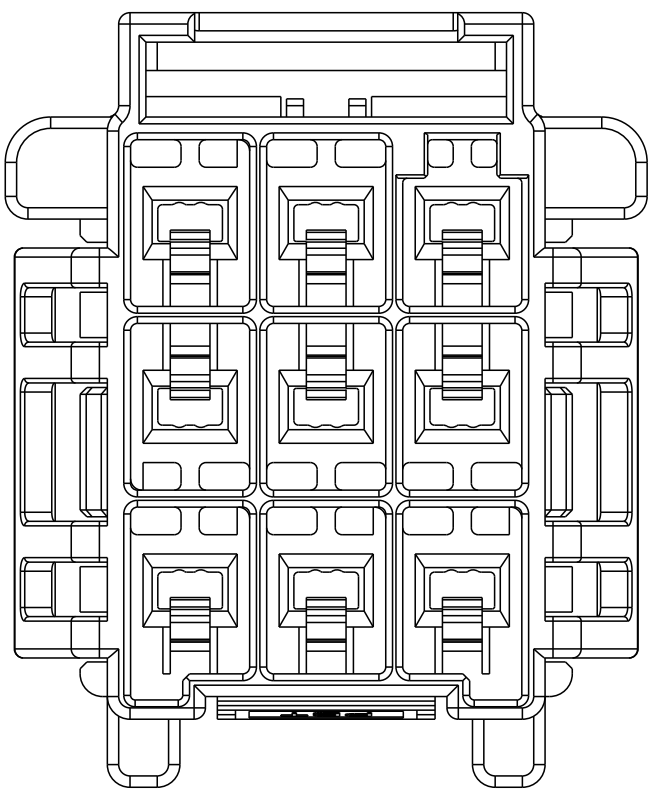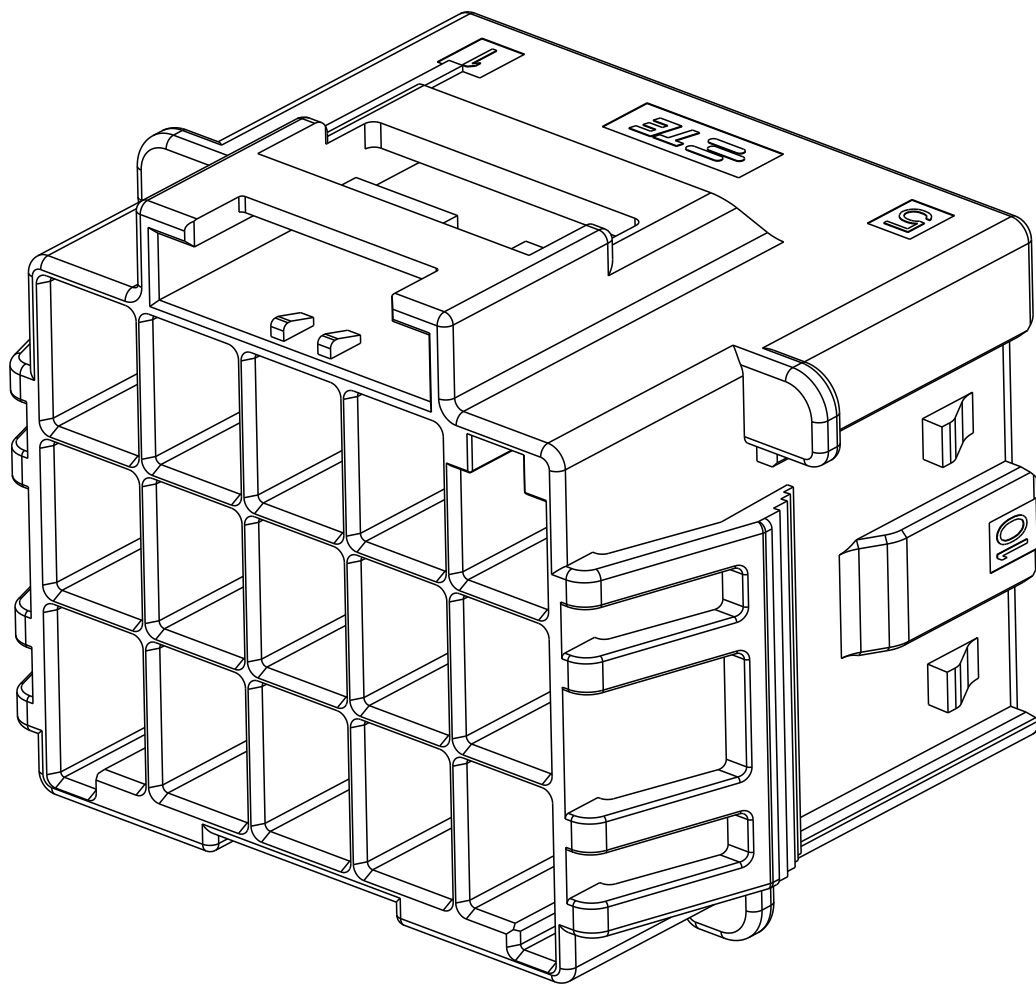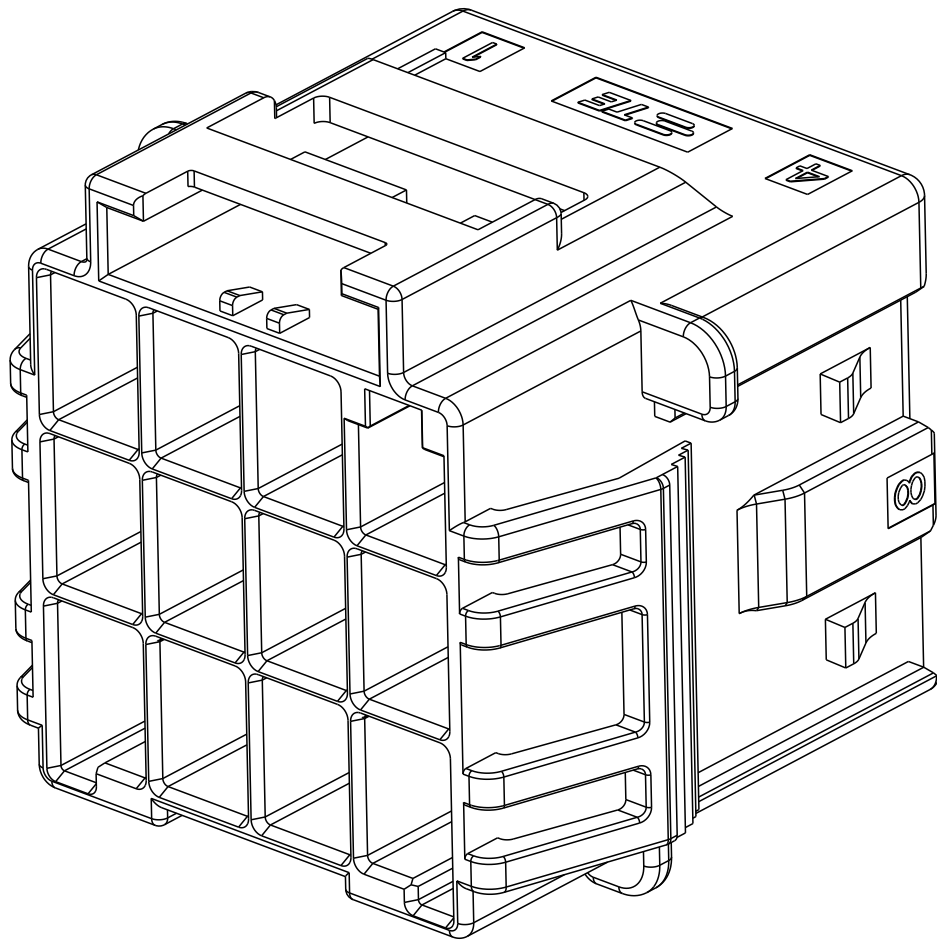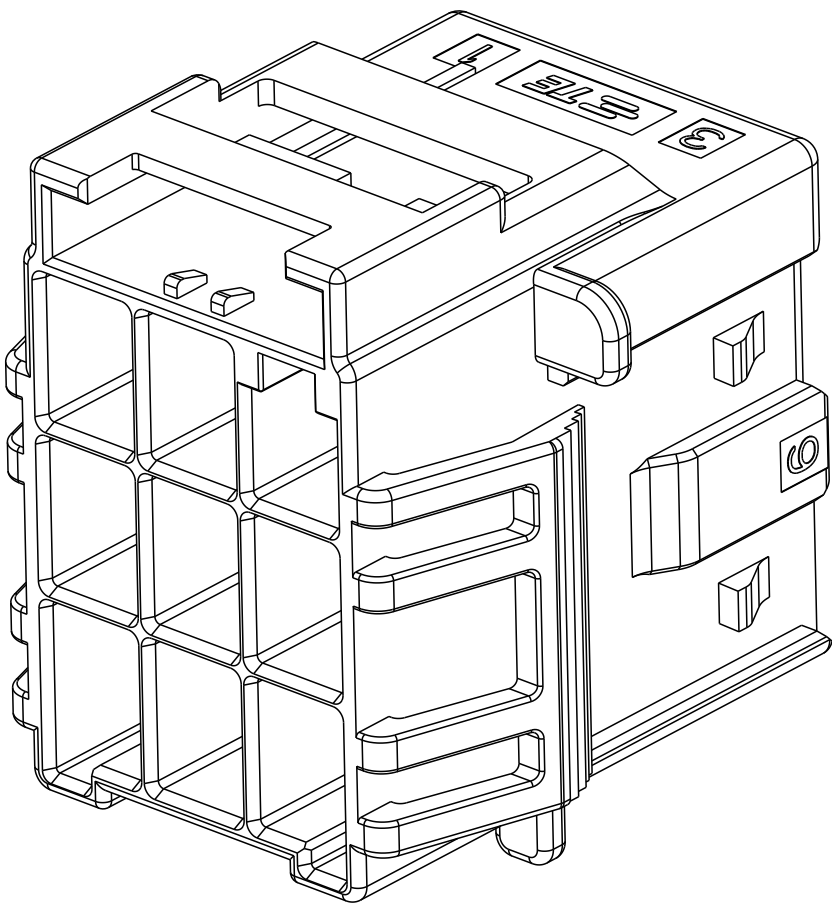

3*3 POSITIONS

3*4 POSITIONS

3*5 POSITIONS

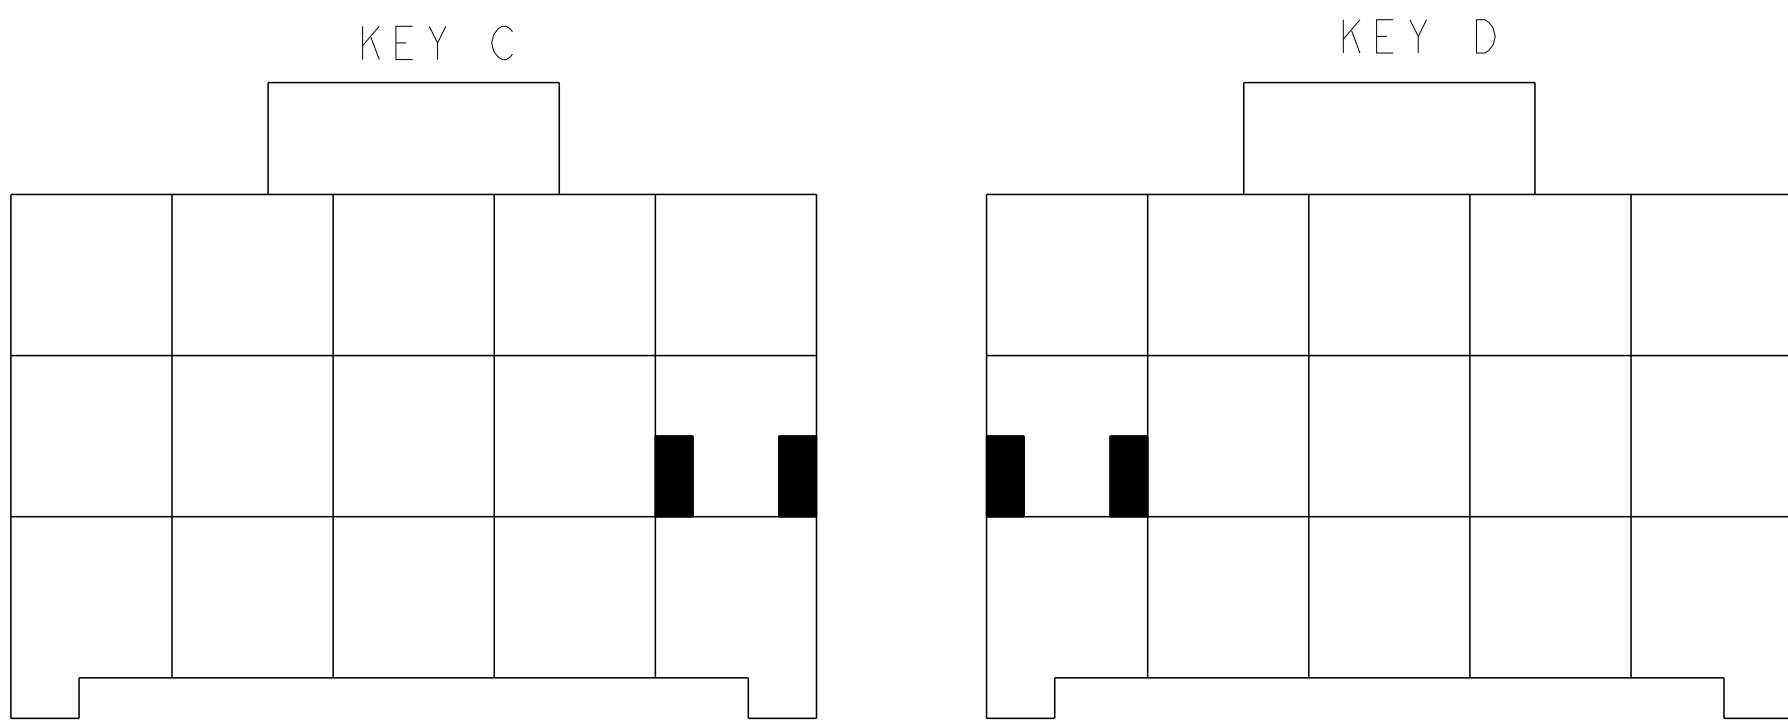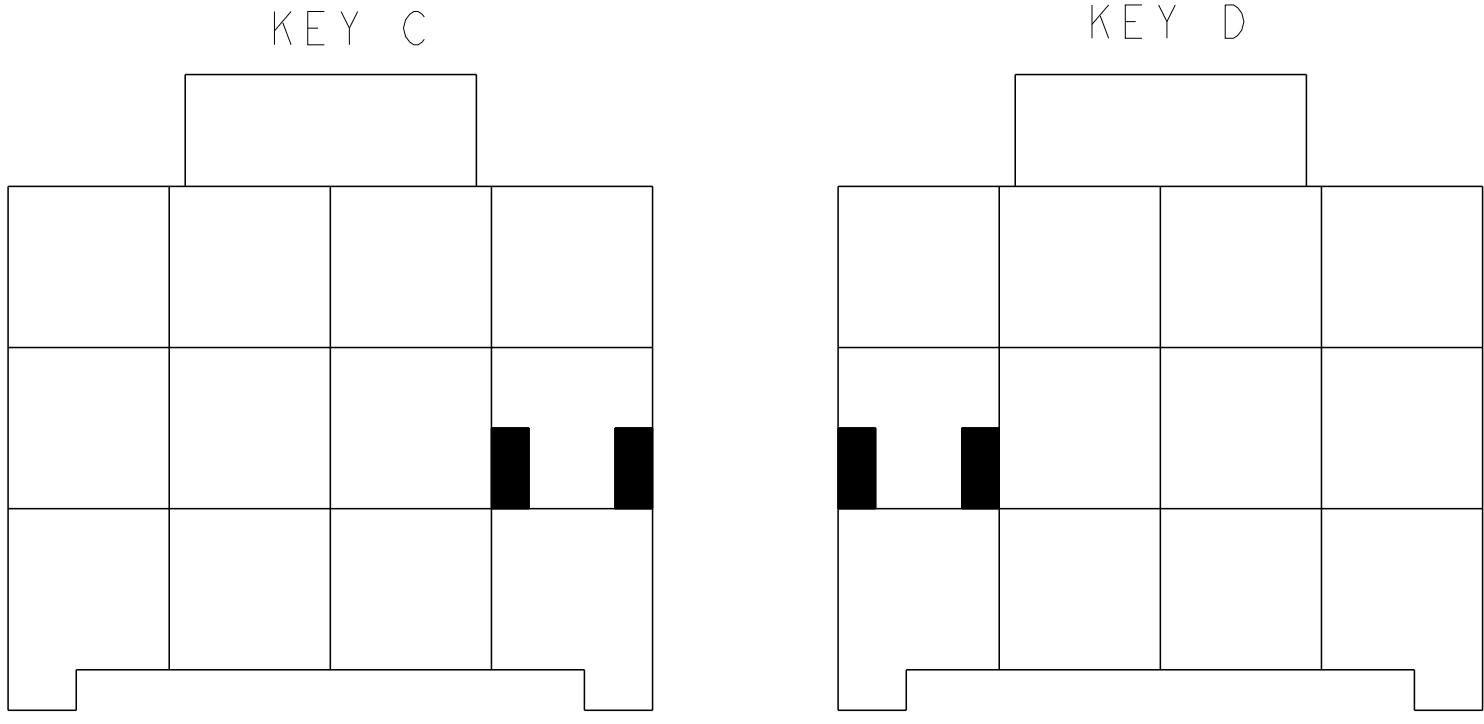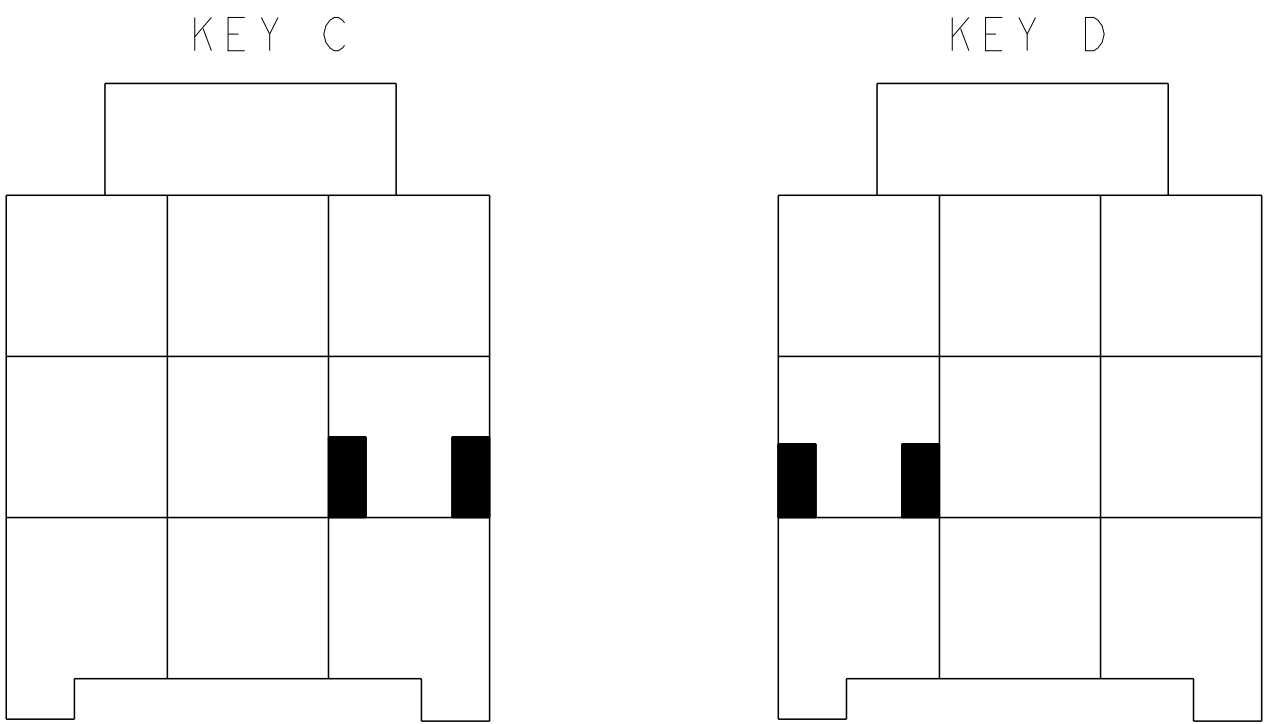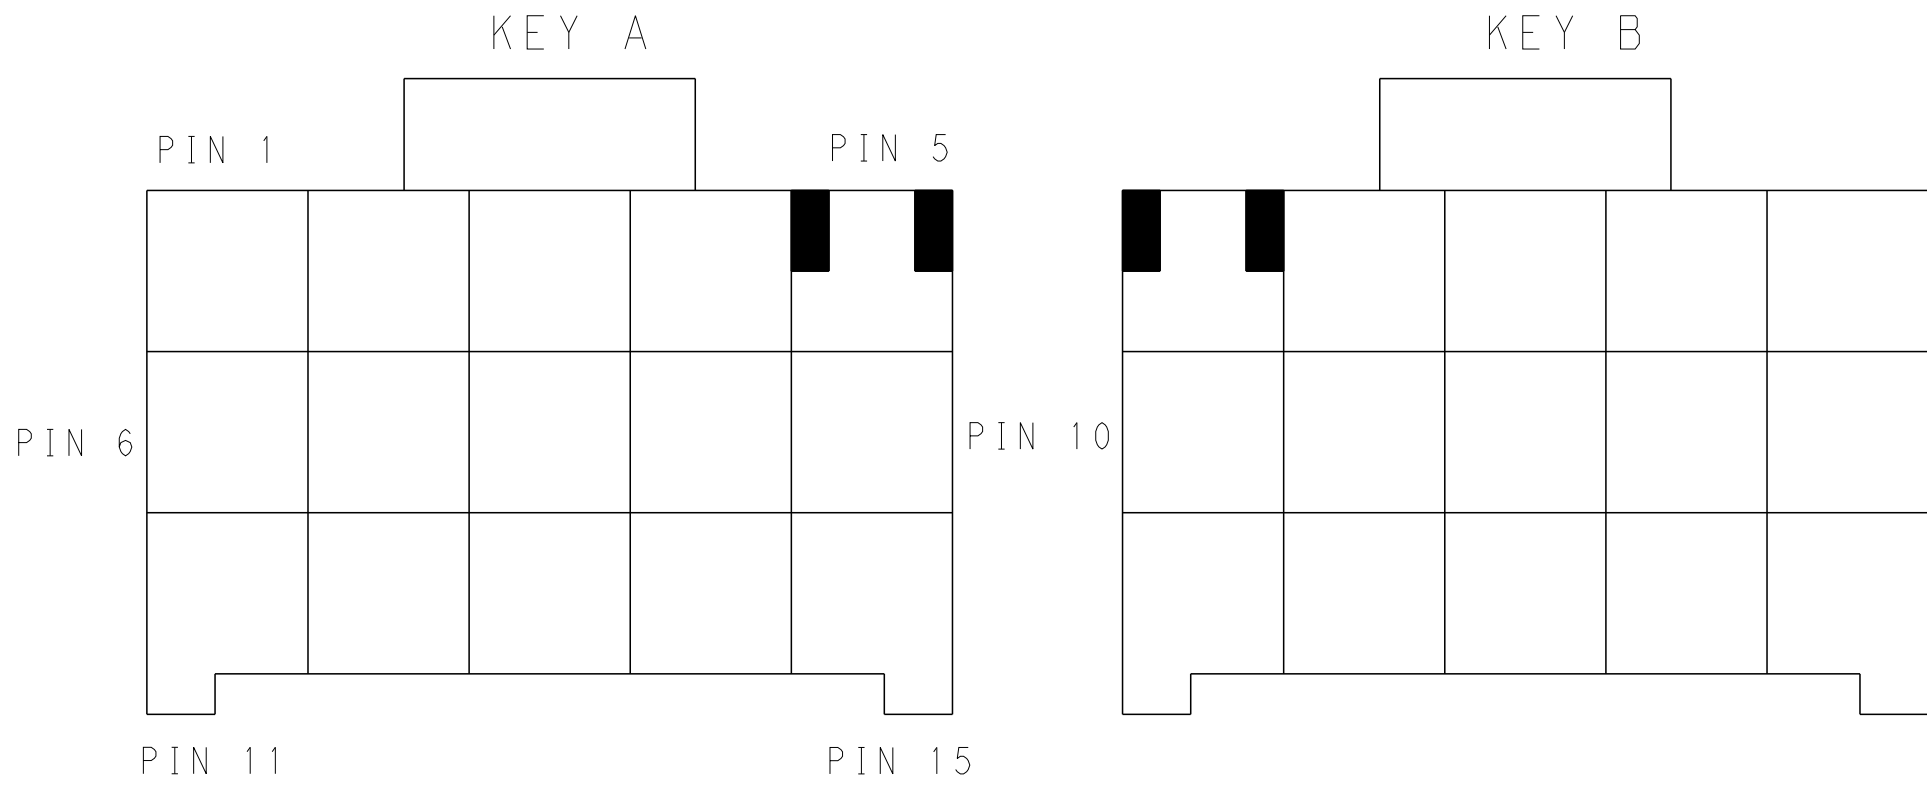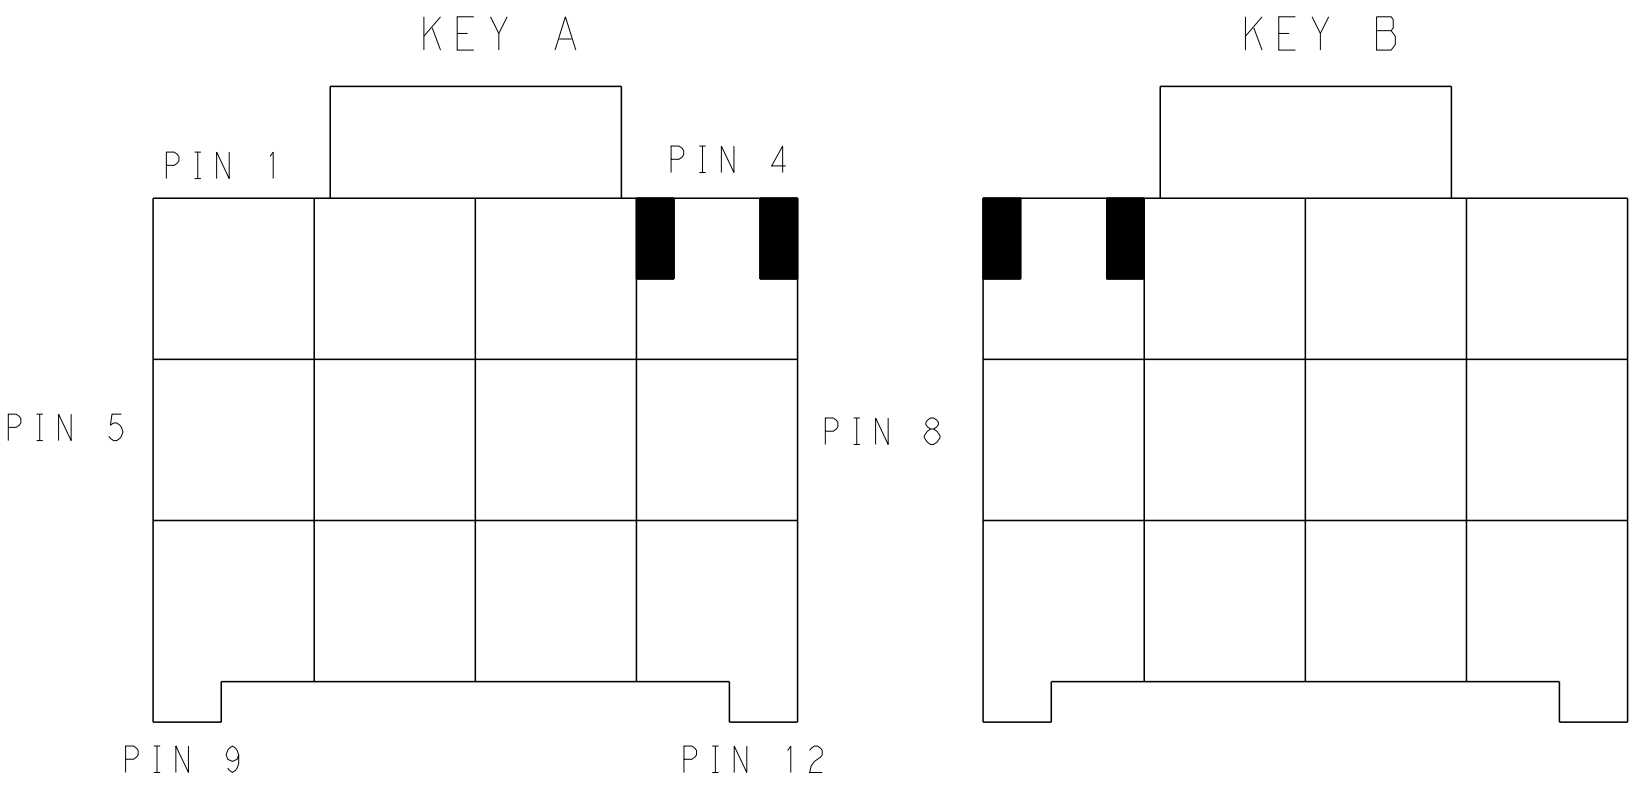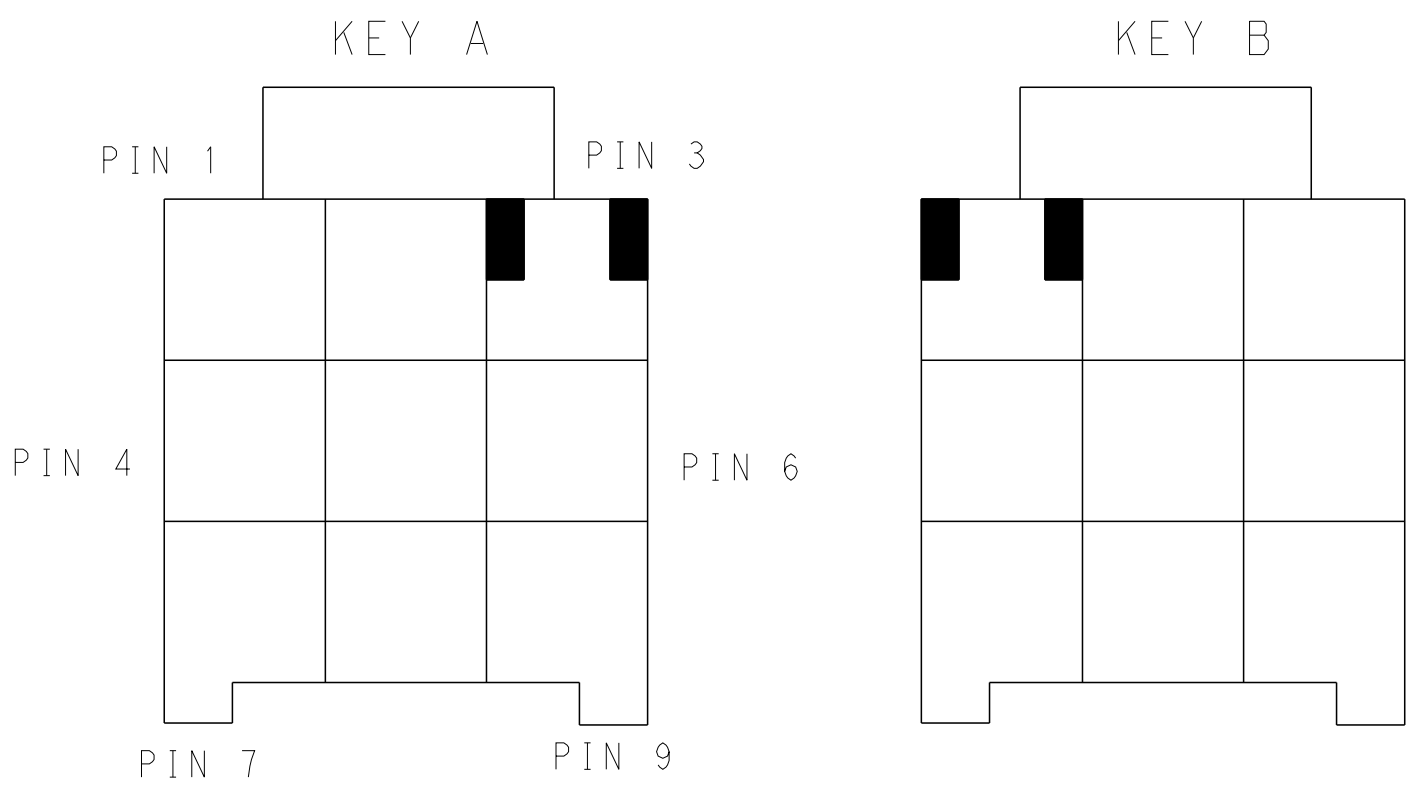

3*5	LEVEL 1	KEY A	1-1971875-7
		KEY B	2-1971875-7
		KEY C	3-1971875-7
		KEY D	4-1971875-7
3*4	LEVEL 2	KEY A	5-1971875-7
		KEY B	6-1971875-7
		KEY C	7-1971875-7
		KEY D	8-1971875-7
3*3	LEVEL 1	KEY A	1-1971875-4
		KEY B	2-1971875-4
		KEY C	3-1971875-4
		KEY D	4-1971875-4
3*3	LEVEL 2	KEY A	5-1971875-4
		KEY B	6-1971875-4
		KEY C	7-1971875-4
		KEY D	8-1971875-4
POS.	MATERIAL	KEY	P/N

KEYING FOR 3*3 POS.

KEYING FOR 3*4 POS.

KEYING FOR 3*5 POS.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN TOMMY.WU 06JUL2012

CHK HAPYE.WU 06JUL2012

APVD YUHONG.MAO 06JUL2012

DIMENSIONS:

mm

0 PLC ±0.35

1 PLC ±0.25

2 PLC ±

3 PLC ±

4 PLC ±

ANGLES ±

FINISH -

TOLERANCES UNLESS OTHERWISE SPECIFIED:

PRODUCT SPEC 108-106118

APPLICATION SPEC 114-106118

WEIGHT -

Customer Drawing

NAME: CAP HOUSING, PANEL MOUNT, TRIPLE ROW POWER TRIPLE LOCK

SIZE CAGE CODE DRAWING NO A100779C=1971875

RESTRICTED TO -

SCALE - SHEET 2 OF 2 REV C

TE Connectivity

TE

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[6-1971875-7](#)