



REV.	DATE	DESCRIPTION				
NC	01/08/07	INITIAL RELEASE				



RECOMMENDED CABLE STRIPPING DIM'S

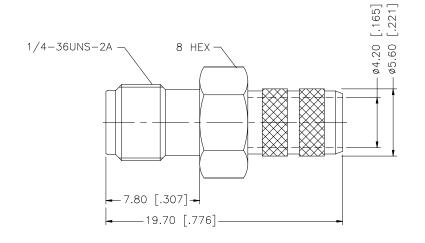





NOTE:

- 1. CRIMPED FERRULE HEX CRIMP SIZE .255.
- 2. CONTACT PIN TO SOLDER.

5	:				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.	APPROVALS	DATE	Amphonal Connov
7	,				UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:	DRAWN G.R.S.	01/08/07	Amphenol Connex
6					0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm	CHECKED		PART DESCRIPTION SMA REVERSE POLARITY CRIMP JACK
4	FERRULE	COPPER	GOLD	1	30 - 120mm ± 0.50mm	ISSUED		
3	CONTACT PIN	BER. COPPER	GOLD	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:	SHEET 1 OF 1		(FOR RG-8/X, LMR240)
2	INSULATOR	TEFLON	NATURAL	1	$.020315 = \pm 0.007$ "	I OF I		
1	BODY	BRASS	GOLD	1	$315 - 1.180 = \pm 0.015$ " $1.180 - 4.724 = \pm 0.020$ "			132240RP
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	C:/132/132	2240RP.DWG	DWG. NO. 132240RP.DWG REV. NC SIZE A SCALE NA

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol: 132240RP