
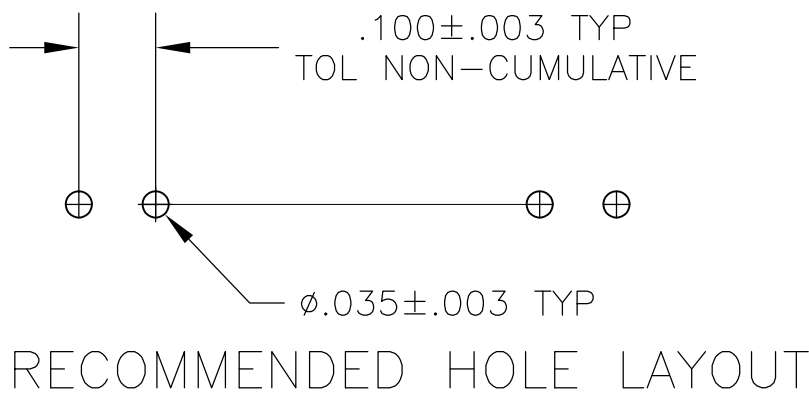


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	Y	REVISED PER ECO-16-006307	03AUG2016	NK	MM

- 1
- ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- 2
- TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- 3
- THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- 4
- MATERIAL: HOUSING: FLAME RETARDANT THERMOPLASTIC: COLOR-BLACK.
POSTS: COPPER ALLOY
- 5
- POSTS: .000100-.000200 MATTE TIN-LEAD OVER .000050 NICKEL.
- 6
- PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.
- 7
- .000100-.000200 BRIGHT TIN OVER .000050 NICKEL.
- 8
- POSTS: .000100-.000200 MATTE TIN OVER .000050 NICKEL.
- 9
- HIGH TEMPERATURE CONFIGURATION
- 10
- OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

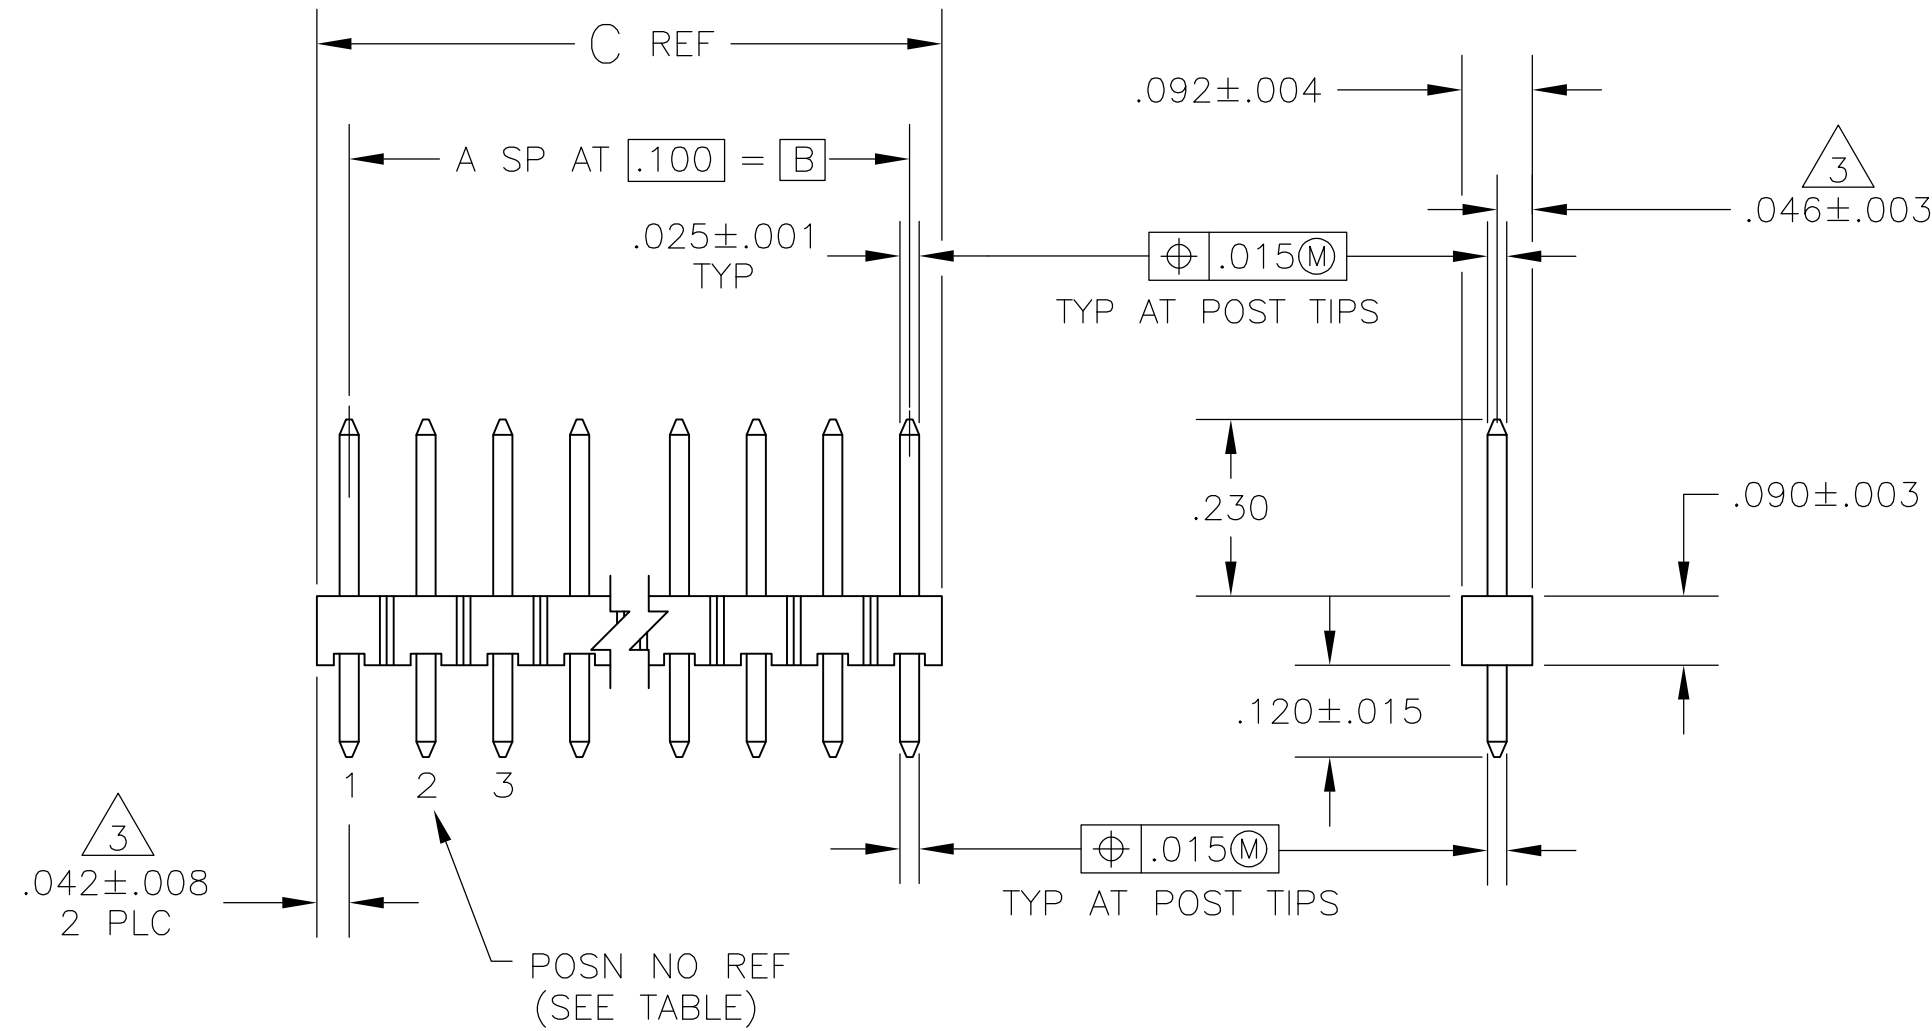

	6	9	2,3	8	.384	.300	3	2	4	6-103547-0
10	OBSOLETE	9	5	8	.784	.700	7	7	8	5-103547-7
10	OBSOLETE	9	6	8	.684	.600	6	6	7	5-103547-6
10	OBSOLETE	9	2	8	.584	.500	5	5	6	5-103547-5
10	OBSOLETE	9	2	8	.484	.400	4	4	5	5-103547-4
10	OBSOLETE	9	2	8	.384	.300	3	3	4	5-103547-1
	OBSOLETE		2	5	.284	.200	2	2	3	103547-9
	OBSOLETE		2,5	5	.684	.600	6	5	7	103547-8
10	OBSOLETE		5	5	.784	.700	7	7	8	103547-7
10	OBSOLETE		6	5	.684	.600	6	6	7	103547-6
	OBSOLETE		2	7	.584	.500	5	5	6	103547-5
10	OBSOLETE		2	5	.484	.400	4	4	5	103547-4
	OBSOLETE		3,4,6	5	.684	.600	6	4	7	103547-3
	OBSOLETE		2,4	5	.484	.400	4	3	5	103547-2
10	OBSOLETE		2	5	.384	.300	3	3	4	103547-1
		REMARKS	POST OMITTED	PLATING	C	B	A	NO OF ACTIVE POSN	NO OF POSN	ASSEMBLY PART NUMBER

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[6-103547-0](#)