




PROFESSIONAL INSULATED TOOLS



COMPLETE INSULATED PROGRAM













Wrenches • Electrician's Knives • L-keys • Bit Sockets • Sockets & Accessories Cable Cutters • Hacksaw • SlimLine Blades • Precision Drivers • TorqueControl Bit Holder Sets • Cushion Grip Drivers • Pliers & Cutters • Wire Strippers • Tweezers



Arc Flash Protection:

Wiha Insulated tools can be a vital component in your Arc Flash protection strategy. What is Arc Flash?

ARC FLASH

An Arc Flash is an electrical explosion due to a fault condition or short circuit when either a phase to ground or phase to phase conductor is connected. Arc flashes cause electrical equipment to explode, resulting in an arc-plasma fireball. Temperatures may exceed 35,000° F (the surface of the sun is 9000° F). These high temperatures cause rapid heating of surrounding air and extreme pressures, resulting in an arc blast. The arc blast will likely vaporize all solid copper conductors which will expand up to 67,000 times its original volume when it is vaporized. The result of this violent event is usually destruction of the equipment involved, fire, and severe injury or death to any nearby people.

WHY ARC FLASHES HAPPEN

There are a variety of reasons why an Arc Flash can occur, but most of them are preventable. Most arc flashes occur when maintenance workers are manipulating live equipment for testing or repair and accidentally cause a fault. Improper tools, improper electrical equipment, corrosion of equipment, improper work techniques and lack of training are just some of the events that can lead to a devastating arc flash or arc blast.

ARC FLASH COMPLIANCE

There are 4 main regulations that govern electrical safety & arc flash:

1. OSHA Standards 29CFR, Part 1910. Occupational Safety and Health Standards. 1910 sub part S (electrical) Standard number 1910.333 specifically addresses Standards for Work Practices and references NFPA 70E. OSHA 29CFR 1910.335 (a) (1)(i) requires the use of protective equipment when working where a potential electrical hazard exists and 29CFR 1910.132(d)(1) which requires the employer assess the workplace for hazards and the need for personal protective equipment. OSHA compliance is required by any plant building or facility.

2. The National Fire Protection Association (NFPA) Standard 70 - 2002 "The National Electrical Code" (NEC) contains requirements for warning labels.


3. NFPA 70E provides guidance on implementing appropriate work practices that are required to safeguard workers from injury while working on or near exposed electrical conductors or circuit parts that could become energized. Part II 2-1.3.3 regarding Arc Flash Analysis states that a "Flash Hazard Analysis shall be done before a person approaches any exposed electrical conductor or circuit part that has not been placed in an electrical safe work condition". This Arc Flash Hazard Analysis must be done to determine the level of Personal Protection Equipment PPE that a worker must use, and the Arc Flash Boundary in inches along with the incident energy found at each location. Each panel must be marked with an ANSI z535 approved Arc Flash Warning Label.

4. The Institute of Electronics and Electrical Engineers (IEEE) 1584 – 2002 Guide to Performing Arc-Flash Hazard Calculations

copyright $\ensuremath{\mathbb{O}}$ information by: American Trainco, Inc. http://www.martinarcflash.com

OSHA

Wiha tools assists with compliance of OSHA 29CFR 1910 (Sub Parts electrical standard)

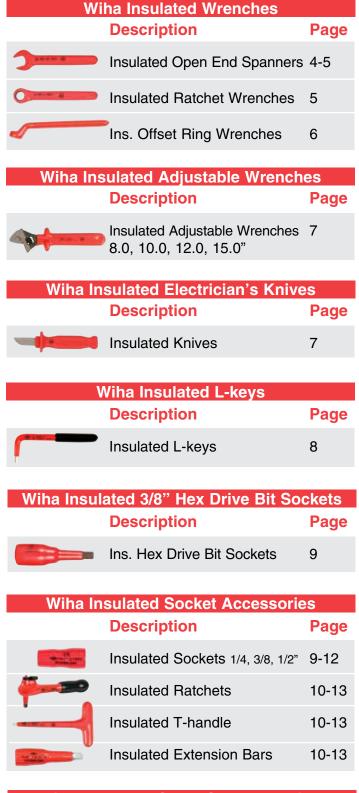

Wiha Insulated Cable Cutters & Pliers

Description



Page



Wiha Insulated Hacksaw				
	Page			
	Insulated Hacksaw	13		

Wiha Insulated TorqueControl Tools					
Description Pag					
Insulated Torque Ratchet	16				
Insulated TorqueControl Handle & Blade Holder	17				

Wiha Insulated Pop-Up SlimLine Blade Sets			
Description Page			
Insulated Pop-Up Sets	17		

Wiha Insulated SlimLine Tools					
	Description	Page			
with a	Insulated SlimLine Handles	18			
A	Insulated SlimLine Blade Sets	17-18			
and the second second	Insulated SlimLine Blades	19			
	Insulated SlimLine Drivers	21			
	Insulated SlimLine Driver Sets	21-22			

Wiha speedE Electric Screwdriver				
Description Page				
	speedE Screwdriver	20		

Wiha Insulated Pico Finish Screwdrivers				
Description Pag				
	Insulated PicoFinish Drivers	22		
	Insulated PicoFinish Sets	22		

Wiha Insulated Pop-Up Insert Bit Sets **Description** Page EEEE Insulated Pop-Up Sets 28

Wiha Insulated Tools					
	Page				
wiha	Xeno Terminal Block Combination Screwdrivers	25			
wiha	Voltage Detectors	26			
-	Insulated Hex Inch/Metric T-handles	15			
= wiha	Insulated Slotted Drivers	23-24			
- Wihay 🗘	Insulated Phillips Drivers	23-24			
	Insulated Torx [®] Drivers	25			
	Insulated Nut Drivers	27			
	Insulated Pozidriv®	26			
- 0	Insulated Square Tip	25			
	Insulated Tweezers	14			

Wiha Insulated Belt Pack Pouch Sets



Description Page **Insulated Belt Pack Pouches** 28-29 **Pliers & Cutters** Pliers/Cutters & Screwdrivers Pliers/Cutters & Multi Bit Set

Wiha Insulated 1000Volt Pliers/Cutters				
	Description	Page		
	Insulated Combination Pliers	36		
<8	Insulated Heavy Duty Diagonal Cutters	37		
\ll	Insulated Pliers	38		
	Insulated Stripping Pliers	37		
1	Insulated Pliers Sets	28-35		

Wiha Insulated Inomic Pliers				
	Description	Page		
6	Insulated Inomic Pliers	39		

Wiha Insulated Industrial Pliers/Cutters **Description** Page Insulated Industrial Pliers/Cutters 40-44



Wiha Insulated Open-End Wrenches

Insulation Test Standards: Insulation according to ASTM F-1505,

EN/IEC 60900, VDE 0680, DIN 7446 and CSA

Angled 15°

Steel Forged from chrome vanadium, meets -DIN 3110

Insulation High visibility, grip is double coated

☆1000V Each tool individually tested to 10,000 Volts & certified to 1000 Volt ac or 1500 Volt dc



1000Volt

20190	14 Piece Insulated Inch Open				
End Wren	ch Set				
Item	0	OAL	0	OAL	••
No.	Inch	Inch	Inch	Inch	lbs.
20190	5/16	3.9	3/4	7.0	5.70
	3/8	4.1	13/16	7.5	
	7/16	4.6	7/8	7.6	
	1/2	5.5	15/16	7.9	
	9/16	5.7	1	8.4	
	5/8	6.2	1-1/16	9.2	
	11/16	6.5	1-1/8	9.1	



\Rightarrow 1000Volt

20091 15 Piece Insulated Metric Open End Wrench Set OMM OAL <u>.</u> Item Омм OAL No. mm mm mm lbs. mm 20091 6.0 97 14 150 3.0 7.0 98 15 151 8.0 104 16 164 9.0 108 17 162 10.0 107 19 178 11.0 118 22 196 24 211 12.0 129 13.0 137

22 20 10 1001 6

1000Volt

201 Inch Open-End Wrenches, With Insulated Handle Insulation According to VDE Specification 0680 and EN/IEC 60900, DIN 7446 and CSA, up to 1000 Volt. Individually Tested. Chrome-vanadium steel, hardened. Angled 15°.

narueneu.	/ ingiou	10.			
Item	0	OAL	OAL	•••	
No.	Inch	Inch	mm	lbs.	pkg.
20131	1/4	3.4	87.5	.04	1
20133	5/16	3.9	100	.05	1
20135	3/8	4.1	105	.09	1
20136	7/16	4.6	117	.09	1
20137	1/2	5.5	140	.15	1
20138	9/16	5.7	146	.15	1
20140	5/8	6.2	158	.20	1
20141	11/16	6.5	165	.23	1
20142	3/4	7.0	178	.33	1
20144	13/16	7.5	191	.42	1
20145	7/8	7.6	192	.44	1
20146	15/16	7.9	201	.51	1
20147	1	8.4	213	.61	1
20148	1-1/16	9.2	233	.79	1
20149	1-1/8	9.2	233	.77	1
20151	1-1/4"	7.5		-	1
20154	1-1/2"	7.5			1

* Lengths are +/- 5% due to coating process



200	Metric Open-End Wrenches,				
With Insulated Handle					
Item	Омм	OAL	OAL	•••	
No.	mm	mm	Inch	lbs.	pkg.
20006	6.0	97	3.8	.04	1
20007	7.0	98	3.9	.05	1
20008	8.0	104	4.1	.07	1
20009	9.0	108	4.3	.07	1
20010	10.0	107	4.2	.08	1
20011	11.0	118	4.6	.11	1
20012	12.0	129	5.1	.11	1
20013	13.0	137	5.4	.19	1
20014	14.0	150	5.9	.19	1
20015	15.0	151	5.9	.17	1
20016	16.0	164	6.5	.22	1
20017	17.0	168	6.4	.24	1
20018	18.0	173	6.8	.41	1
20019	19.0	178	7.0	.32	1
20020	20.0	190	6.9	.36	1
20022	22.0	196	7.7	.39	1
20024	24.0	211	8.3	.58	1
20027	27.0	218	8.6	.68	1
20030	30.0	235	9.3	.97	1
20032	32.0	237	9.3	1.01	1



1000Volt

20192	8 Piece Insulated Inch Open End
Wrench Se	et

Item	0	OAL	0	OAL	• ` •
No.	Inch	Inch	Inch	Inch	lbs.
20192	5/16	3.9	9/16	5.7	1.59
	3/8	4.1	5/8	6.2	
	7/16	4.6	11/16	6.5	
	1/2	5.5	3/4	7.0	



☆1000Volt

20093	8 Piec	8 Piece Insulated Metric Open			
End Wren	ch Set				
Item		OAL	Омм	OAL	•••
No.	mm	mm	mm	mm	lbs.
20093	6.0	97	13.0	137	1.4
	7.0	98	14.0	150	
	8.0	104	17.0	162	
	10.0	107	19.0	178	




Wiha Insulated **Open-End Wrenches**



Wiha Insulated Ratchet Wrenches









6

213 Inch Insulated Ratchet Wrenches, With Insulated Handle Insulation According to EN/IEC 60900, ISO 3110 Specification, Up To 1000 Volt. Individually Tested. Blade chrome-vanadium steel hardened

Diade Chilo	ne-vana	aulum s	leel, na	luene	u.
Item	0	OAL	OAL	•••	
No.	Inch	mm	Inch	lbs.	pkg.
21325	3/8	140	5.5	.14	1
21327	7/16	143	5.6	.15	1
21329	1/2	154	6.1	.18	1
21331	9/16	162	6.4	.22	1
21333	5/8	177	7.0	.30	1
21335	3/4	209	8.2	.46	1

☆1000Volt

212 Metric Insulated Ratchet Wrenches, With Insulated Handle Insulation According to EN/IEC 60900, ISO 3110 Specification, Up To 1000 Volt. Individually Tested. Blade chrome-vanadium steel, hardened,

6

Item		OAL	OAL	€	
No.	mm	mm	Inch	lbs.	pkg.
21208	8.0	125	4.9	.08	1
21210	10.0	140	5.5	.12	1
21212	12.0	150	5.9	.18	1
21213	13.0	152	6.0	.18	1
21214	14.0	163	6.4	.22	1
21217	17.0	193	7.6	.38	1
21219	19.0	210	8.3	.45	1

20196	13 Pc. Insulated Metric Open				
End Wren	ch Set	In Too	ol Box T	ray	
Item	0	OAL	0	OAL	
No.	mm	mm	mm	mm	lbs.
20196	8.0	104	16.0	164	4.90
	10.0	107	17.0	168	
	11.0	118	18.0	173	
	12.0	129	19.0	178	
	13.0	137	22.0	196	
	14.0	150	24.0	211	
	15.0	151			



21391	6 Piece Inch Insulated Ratchet
Wrenches	Set

Item	0	OAL		OAL	€
No.	Inch	Inch		Inch	lbs.
21391	3/8	5.5	9/16	6.4	1.95
	7/16	5.6	5/8	7.0	
	1/2	6.1	3/4	8.2	
	1/2	6.1	3/4	8.2	



21290	7 Pie	7 Piece Metric Insulated Ratchet				
Wrenches Set						
Item	Омм	OAL	Омм	OAL	• ` •	
No.	mm	mm	mm	mm	lbs.	
21290	8.0	4.9	14.0	6.4	2.10	
	10.0	5.5	17.0	7.6		
	12.0	5.9	19.0	8.3		
	13.0	6.0				



(Witha) Toll Free: (800) 494-6104

Wiha Insulated Deep Offset Ring Wrenches





21096	8 Piece Inch Insulated Offset		
Ring Wrenches Set			
Item No.	Inch:	•••	
21096	5/16, 3/8, 7/16, 1/2, 9/16,	lbs.	
	5/8, 11/16, 3/4"	3.20	



$\pm 1000Volt$

21094	16 Piece Inch Insulated O	ffset
Ring Wrei	nches Set	
Item No.	Inch:	• ` •
21094	1/4, 5/16, 3/8, 7/16, 1/2,	lbs.
	9/16, 5/8, 11/16, 3/4,	8.70
	25/32, 13/16, 7/8, 15/16,	
	1, 1-1/16, 1-1/4"	

-		
	1000Volt	

210 Insulated Inch Offset Ring

Wrenches	Blade CV	steel, ha	ardened.	
Item	0	÷.		
No.	Inch	lbs.	pkg.	
21040	1/4	.16	1	
21042	5/16	.18	1	
21044	3/8	.20	1	
21046	7/16	.22	1	
21048	1/2	.30	1	
21050	9/16	.30	1	
21052	5/8	.34	1	
21054	11/16	.34	1	
21056	3/4	.44	1	
21057	25/32	.58	1	
21058	13/16	.52	1	
21060	7/8	.64	1	
21062	15/16	.90	1	
21064	1.0	.96	1	
21066	1-1/16	1.28	1	
21068	1-1/4	1.38	1	

1000Volt



 21095
 8 Piece Metric Insulated Offset

 Ring Wrenches Set
 Item No.

 Metric:
 Image: Comparison of the set

 21095
 10.0, 11.0, 12.0, 13.0, Ibs, I4.0, 15.0, 17.0, 19.0mm



☆1000Volt

21093 16 Piece Metric Insulated Offset Ring Wrenches Set

Item No.	Metric:
21093	8.0, 9.0, 10.0, 11.0, 12.0, 13.0,
•••	14.0, 15.0, 17.0, 19.0, 20.0, 22.0,
lbs. 8.70	24.0, 27.0, 30.0, 32.0mm



210 Insulated Metric Offset Ring Wrenches, Insulation According to EN/IEC 60900, ISO 3110 Specification, Up To 1000 Volt. Individually Tested. Blade Chrome-Vanadium steel, hardened.

vanaulum steel, narueneu.								
Item	Омм	OAL	OAL	•••				
No.	mm	mm	Inch	lbs.	pkg.			
21008	8.0	159	6.3	.16	1			
21009	9.0	159	6.3	.18	1			
21010	10.0	171	6.8	.20	1			
21011	11.0	178	7.0	.22	1			
21012	12.0	191	7.5	.30	1			
21013	13.0	194	7.6	.30	1			
21014	14.0	203	8.0	.34	1			
21015	15.0	203	8.0	.34	1			
21017	17.0	219	8.6	.44	1			
21019	19.0	241	9.5	.52	1			
21020	20.0	250	9.8	.58	1			
21022	22.0	257	10.1	.64	1			
21024	24.0	279	11.0	.90	1			
21027	27.0	286	11.3	.96	1			
21030	30.0	311	12.3	1.28	1			
21032	32.0	318	12.5	1.38	1			

Use & Care Guide For Insulated Tools:

Store tools to minimize risk of damage to insulation, always wear approved eye protection, Inspect insulation prior to each use of any insulated tool. Use insulated tools where the ambient temperature is between -20 to +70° C. Have a qualified safety technician visually inspect insulation on tools annually for safe use.



Wiha Insulated Adjustable Wrenches



76208 Insulated 8" Adjustable Wrench Insulation According to ASTM, EN/IEC, NFPA, CSA and ISO Specification, up to 1000 Volt. Individually Tested. Etched on scale for pre-setting size. Slip guard handle for added protection. Item OAL OAL Capacity 🕁 🛲

No.	Inch	mm	Opening	lbs.	pkg.	
76208	8.0	200	1"	.7	1	

☆1000Volt

76210	Insul	ated 1	0" Adjusta	able V	Vrench		
Etched on scale for pre-setting size.							
Slip guard	Slip guard handle for added protection.						
Item	OAL	OAL	Capacity	•••			
No.	Inch	mm	Opening	lbs.	pkg.		
76210	10.0	250	1-1/4"	1.4	1		

1000Volt

76212	Insul	ated 1	2" Adjusta	able \	Vrench			
Etched on scale for pre-setting size.								
Slip guard	Slip guard handle for added protection.							
Item	OAL	OAL	Capacity	•••				
No.	Inch	mm	Opening	lbs.	pkg.			
76212	12.0	300	1-1/2"	1.9	1			

1000Volt

76215	Insulated 15" Adjustable Wrench						
Etched on scale for pre-setting size.							
Slip guard handle for added protection.							
Item	OAL	OAL	Capacity	₅⊸			
No.	Inch	mm	Opening	lbs.	pkg.		
76215	15.0	380	1-11/16"	2.8	1		



m1000Volt

76290	3 Pc. Insulated Adjustable						
Wrenches	Etched on scale for pre-setting						
size. Slip g	uard handle for added protection.						
Item No.	Set includes the following:						
76290	8.0", 10.0", 12.0" Adjustable Pliers						
⋰	lbs. 4.0						

Wiha Insulated Electrician's Knives



Each tool individually tested to 10,000 volts & rated to 1000Volt ac or 1500Volt dc



☆1000Volt

15000 Insulated Electrician's Cable Stripping Knife, With Insulated Handle, Insulation According To VDE Specification, Up To 1000 Volt. Individually Tested. Blade tool steel, hardened, molded directly on. Cover included.

Item	Blade	OAL	OAL	••	
No.	mm	mm	Inch	lbs.	pkg.
15000	50	216	8.5	.30	1



\pm 1000Volt

15003 Insulated Electrician's Cable Stripping Knife, With Insulated Handle, Insulation According To VDE Specification, Up To 1000 Volt. Individually Tested.

Straight, partly insulated, strong blade. Insulation molded directly on. Cover included.

Item	Blade	OAL	OAL	••		
No.	mm	mm	Inch	lbs.	pkg.	
15003	50	230	9.0	.23	1	



15050 Insulated Stripping Knife, With Insulated Handle Insulation According To VDE Specification, Up To 1000 Volt. Individually Tested. Blade tool steel, hardened. Insulation molded directly on. Hooked cutting edge, half-round ground. Cover included. Item Blade OAL OAL No. mm mm Inch Ibs. 🖛 222 8.75 .22 pkg. 15050 35

NOTES:



WARNING!

Insulated Tools are intended to provide protection against accidental contact with charged energized circuits. For maximum safety we recommend de-energizing all circuits whenever possible before starting work on electrical apparatus or conductors. Always visually inspect insulation on tools before use, do not use tools if insulation shows signs of wear or damage to the insulated areas of the tool. Wear appropriate eye protection when using hand tools. Use NFPA70E certified insulated protective outer wear when appropriate.





136 Inch Insulated Hex L-keys, With Insulated Handle. Insulation According to IEC 60900 Specification, Up To 1000 Volt. Individually Tested. Blade chrome-vanadium steel, hardened.

Item	0	\Box	\Box	\$ 	•••			
No.	Inch	mm	Inch	Inch	lbs.	pkg.		
13670	1/16	79	3.1	.375	.05	1		
13671	5/64	84	3.3	.50	.05	1		
13672	3/32	89	3.5	.625	.05	1		
13673	7/64	94	3.7	.625	.06	1		
13663	1/8	104	4.1	1.0	.06	1		
13665	5/32	104	4.1	1.0	.06	1		
13666	3/16	134	5.3	1.25	.10	1		
13667	7/32	134	5.3	1.5	.12	1		
13668	1/4	134	5.3	1.5	.16	1		
13669	5/16	144	5.7	1.5	.24	1		
13662	3/8	234	9.2	1.63	.51	1		
13664	1/2	234	9.2	1.63	.77	1		

Wiha Insulated Hex L-keys









				lpha10	00Volt
13694	12 Pc	. Insulat	ted Incl	n Hex L	key Set
Item	0	OAL	0	OAL	•••
No.	Inch	Inch	Inch	Inch	lbs.
13694	1/16	3.1	3/16	5.3	2.40
	5/64	3.3	7/32	5.3	
	3/32	3.5	1/4	5.3	
	7/64	3.7	5/16	5.7	
	1/8	4.1	3/8	9.2	
	5/32	4.1	1/2	9.2	

m heta1000Volt

136 Metric Insulated Hex L-keys, With Insulated Handle. Insulation According to IEC 60900 Specification, Up To 1000 Volt. Individually Tested. Blade chrome-vanadium steel, hardened

Sleel, Haluelleu.						
Item	Омм	\Box	\Box	*I	• •	
No.	mm	mm	Inch	mm	lbs.	pkg.
13650	1.5	100	3.9	.50	.09	1
13651	2.0	105	4.1	.50	.09	1
13652	2.5	115	4.5	.625	.09	1
13653	3.0	130	5.1	.75	.10	1
13654	4.0	120	4.7	1.125	.10	1
13655	5.0	140	5.5	1.375	.10	1
13656	6.0	140	5.5	1.375	.13	1
13658	8.0	150	5.9	1.375	.24	1
13659	10.0	220	8.7	1.375	.51	1
13657	12.0	260	10.2	1.625	.77	1



 \pm 1000Volt 7 Piece Insulated Metric Hex 13691 L-key Set OAL Item OAL Омм •**`**• Омм No. mm mm mm mm lbs. 13691 3.0 130 8.0 150 2.07 4.0 120 10.0 220 5.0 140 12.0 260 6.0 140

1000Volt



13693	10 Pi	10 Piece Insulated Metric Hex					
L-key Set							
Item	Омм	OAL	Омм	OAL	÷.		
No.	mm	mm	mm	mm	lbs.		
13693	1.5	100	5.0	140	2.26		
	2.0	105	6.0	140			
	2.5	115	8.0	150			
	3.0	130	10.0	220			
	4.0	120	12.0	260			



Wiha Insulated **Hex Bit Sockets**

•				☆1000Volt
318	Insulat	ed 3/8"	Drive	Sockets
Chrome-	vanadium	steel, fo	rged, o	il-hardened.
Item		OAL	€	
No.	Inch	Inch	lbs.	pkg.
31805	3/16	3.1"	.13	1
31807	7/32	3.1"	.14	1
31809	1/4	3.1"	.14	1
31811	5/16	3.1"	.16	1
31813	3/8	3.1"	.18	1
31815	7/16	3.1"	.20	1

Wiha Insulated Socket Adapters / Reducers



Insulated Socket Adapters / Reducers 2) / ata al favora al all havelanda

CV steel, forged, oil-nardened.					
Item		€			
No.	Size	lbs.	pkg.		
31350	1/4 - 3/8	.05	1		
31450	3/8 - 1/2	.11	1		
31460	3/8 - 1/4	.12	1		
31650	1/2 - 3/8	.22	1		

Wiha Insulated 1/4" Sockets, Accessories & Sets





313 Insulated 1/4" Drive Sockets -6 Point, Insulation According To ASTM

F-1505, DIN 7448 & CSA Specification, Up To 1000 Volt. Individually Tested. . . .

Chrome-vanadium steel, forged, oil-hardened.					
Item		• ` •			
No.	Inch	lbs.	pkg.		
31336	3/16	.03	1		
31337	7/32	.03	1		
31338	1/4	.03	1		
31339	9/32	.04	1		
31340	5/16	.04	1		
31341	11/32	.05	1		
31342	3/8	.05	1		
31343	7/16	.06	1		
31344	1/2	.07	1		
31345	9/16	.07	1		

*Sockets must be used with insulated ratchets & extensions



31390	13 Pc Insulated 1/4" Drive Socket
Set - Inch	CV steel, forged, oil-hardened
sockets. In	sulated after EN/IEC 60900.
Item No.	Set includes the following:
31390	3/16, 7/32, 1/4, 9/32, 5/16, 11/32,
€ €	3/8, 7/16, 1/2, 9/16"
lbs. 1.39	1/4" x 50mm Extension Bar
	1/4" x 100mm Extension Bar
	1/4" Ratchet - 140mm

Metric -**☆1000Volt** 6 Point

-							
313	Insulated	1/4"	Drive Sockets -				
6 Point,	6 Point, Insulation According						
Chrome-	/anadium st	eel, fo	rged, oil-hardened.				
Item		• •					
No.	mm	lbs.	pkg.				
31326	5.0	.03	1				
31327	6.0	.03	1				
31328	7.0	.03	1				
31329	8.0	.04	1				
31330	9.0	.04	1				
31331	10.0	.05	1				
31332	11.0	.05	1				
31333	12.0	.06	1				
31334	13.0	.06	1				
31335	14.0	.07	1				

*Sockets must be used with insulated ratchets & extensions



31391 13 Pc. Insulated 1/4" Drive Socket Set - Metric CV steel, forged, oil-hardened sockets. Insulated after EN/IEC 60900. Item No. Set includes the following: 31391 5, 6, 7, 8, 9, 10, 11, 12, 13, 14mm ••• 1/4" x 50mm Extension Bar 1/4" x 100mm Extension Bar lbs. 1.41 1/4" Ratchet - 140mm

*Sockets must be used with insulated ratchets & extensions

3.1"

.22 1

1/2

31817



7 Pc. Insulated 3/8" Drive Socket 31890 Set - Inch CV steel, forged, oil-hardened sockets. Insulated to EN/IEC 60900. Set includes the following: Item No. 31890 3/16, 7/32, 1/4, 5/16, 3/8, lbs. 1.7 7/16, 1/2"

☆1000Volt



Chrome-vanadium steel, forged, oil-hardened.					
Item		OAL	€€		
No.	Inch	Inch	lbs.	pkg.	
31830	1/4	2.75	.22	1	
31832	5/16	2.75	.24	1	
31834	3/8	2.75	.25	1	
31836	7/16	3.63	.31	1	
31838	1/2	3.63	.34	1	
31840	9/16	3.63	.36	1	
31842	5/8	3.63	.42	1	
31844	3/4	3.63	.51	1	

*Sockets must be used with insulated ratchets & extensions



10 Tools that work for you

Wiha Insulated 1/4" Sets & Accessories




lpha1000Volt

31394 11 Pc. Insulated 1/4" T-handle & Socket Set-Inch CV steel, forged, oil-hardened sockets. Insulated after EN/IEC 60900. Set includes the following: Item No. 31394 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, ••• 3/8, 7/16, 1/2, 9/16" Insulated 1/4" T-handle lbs. 1.40

Each tool individually tested to 10.000 volts & certified to 1000Volt ac or 1500Volt dc







Insulated 1/4" Drive Ratchet, 12851 EN/IEC 60900 & CSA Chrome-Vanadium steel. Thumb lever for rapid reverse. Item OAL OAL 🚽 🕳 Inch mm Inch No. lbs. pkg. 1/4" 140 12851 5.5 .28 1

☆1000Volt

Insulated 1/4" Drive T-handle, 29006 With Insulated Handle. Insulation according to EN/IEC 60900 & CSA specification, up to 1000 Volt. Individually Tested. Blade CV steel, hardened

Item		OAL	OAL	<u>ب</u>	
No.	Inch	mm	Inch	lbs.	pkg.
29006	1/4	160	6.2"	.57	1



128	Insulate	ed 1/4"	Exten	sion E	Bars,	
ASTM F-1505, EN/IEC 60900 & CSA						
Chrome-Vanadium steel.						
Item		OAL	OAL	•••		
No.	Inch	mm	Inch	lbs.	pkg.	
12854	1/4"	50	2.0	.08	1	
12855	1/4"	100	3.9	.12	1	

Wiha Insulated 3/8" Sockets



☆1000Volt

314 Insulated 3/8" Drive Sockets -Insulation according to EN/IEC 60900, DIN 7448 & CSA specification, up to 1000 Volt. Individually Tested.

CV steel, forged, oil-hardened.					
Item		÷.			
No.	Inch	lbs.	pkg.		
31425	1/4	.07	1		
31428	9/32	.07	1		
31429	5/16	.07	1		
31430	11/32	.07	1		
31431	3/8	.08	1		
31432	7/16	.08	1		
31433	1/2	.10	1		
31434	9/16	.10	1		
31435	5/8	.10	1		
31436	11/16	.13	1		
31437	3/4	.14	1		
31438	13/16	.17	1		
31439	7/8	.18	1		

*Sockets must be used with insulated ratchets & extensions



\pm 1000Volt

315 Insulated 3/8" Drive Sockets-Metric Insulation according to VDE, EN/IEC 60900, DIN 7448 & CSA specification, up to 1000 Volt. Individually Tested. Chromevanadium steel, forged, oil-hardened

vanadium	vanadium steel, forged, oli-nardened.					
Item		€				
No.	mm	lbs.	pkg.			
31506	6.0	.07	1			
31507	7.0	.07	1			
31508	8.0	.07	1			
31509	9.0	.07	1			
31510	10.0	.07	1			
31511	11.0	.08	1			
31512	12.0	.10	1			
31513	13.0	.10	1			
31514	14.0	.10	1			
31515	15.0	.10	1			
31516	16.0	.10	1			
31517	17.0	.11	1			
31518	18.0	.12	1			
31519	19.0	.14	1			
31520	20.0	.15	1			
31521	21.0	.17	1			
31522	22.0	.18	1			
31524	24.0	.26	1			



Wiha Insulated 3/8" Sockets & Sets



31493 10 Pc. Insulated 3/8" Drive Socket Set - Inch CV steel, forged, oil-hardened sockets. Insulated to EN/IEC 60900. Item No. Set includes the following: 31493 5/16, 3/8, 7/16, 1/2, • 9/16, 5/8, 11/16, 3/4" lbs. 2.50 3/8" x 125mm Extension Bar 3/8" Ratchet - 190mm



31590	10 Pc. Insulated 3/8" Drive Socket
Set - Metr	ic CV steel, forged, oil-hardened
sockets. I	nsulated to EN/IEC 60900.
Item No.	Set includes the following:
31590	8, 10, 11, 12, 13, 14, 17, 19mm
.	3/8" x 125mm Extension Bar
lbs. 2.50	3/8" Ratchet - 190mm



31491	16 Piece Insulated 3/8" Drive
Socket Se	t - Inch/Metric CV steel, forged, oil-
hardened	sockets. Insulated to EN/IEC 60900.
Item No.	Set includes the following:
31491	5/16, 3/8, 7/16, 1/2,
• ` •	9/16, 5/8, 11/16, 3/4"
lbs. 2.01	8, 10, 11, 12, 13, 14, 17, 19mn



31495 24 Pc. Insulated 3/8" Drive Socket Set - Inch CV steel, forged, oil-hardened sockets. Insulated to EN/IEC 60900. Item No. Set includes the following: 31495 1/4, 9/32, 5/16, 11/32, 3/8, 7/16 ••• 1/2, 9/16, 5/8,11/16, 3/4" Sockets 3/8" x 125mm Extension Bar lbs. 9.07 3/8" x 250mm Extension Bar 3/8" Ratchet - 190mm Insulated Electrician's Knife - 50mm Slotted: 3.5, 4.5, 6.5mm Phillips: #1, 2, 3 6.3" Long Nose Pliers 8.0" Combo Pliers 6.3" Diagonal Cutters

*Sockets must be used with insulated ratchets & extensions



31592 24 Pc. Insulated 3/8" Drive Socket Set - Metric CV steel, forged, oil-hardened sockets. Insulated to EN/IEC 60900. Item No. Set includes the following: 6, 7, 8, 9, 10, 11, 12, 31592 13, 14, 17, 19mm Sockets lbs. 3/8" x 125mm Extension Bar 9.08 3/8" x 250mm Extension Bar 3/8" Batchet - 190mm Insulated Electrician's Knife - 50mm Slotted: 3.5, 4.5, 6.5mm Phillips: #1, 2, 3 6.3" Long Nose Pliers 8.0" Combo Pliers 6.3" Diagonal Cutters

*Sockets must be used with insulated ratchets & extensions



12852	Insu	ated 3	8/8" D	rive F	Ratchet,	
EN/IEC 60	EN/IEC 60900 CV steel. Socket release					
button. Thu	umb le	ver for	rapid	revers	se.	
Item		OAL	OAL	÷		
No.	Inch	mm	Inch	lbs.	pkg.	
12852	3/8"	190	7.5	.93	1	



11

10 Pc. Insulated 3/8" T-handle & 31496 Socket Set-Inch CV steel, forged, oil-hardened sockets. Insulated after EN/IEC 60900. Item No. Set includes the following: 31496 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, **.**

3/8" x 125mm Extension Bar

Insulated 3/8" T-handle

11/16, 3/4"

lbs. 2.47

31595	10 Pc. Insulated 3/8" T-handle &
Socket Se	t - MM CV steel, forged, oil-hardened
sockets. In	sulated after EN/IEC 60900.
Item No.	Set includes the following:
31595	8, 10, 11, 12, 13, 14, 17, 19mm
• •	3/8" x 125mm Extension Bar
lbs. 2.47	Ins. 3/8" T-handle

Wiha Insulated Socket Accessorie 3/8"



128	Insulat	ed 3/8'	' Exte	nsion	Bars,
EN/IEC 60900 Chrome-Vanadium steel.					
Item		OAL	OAL	.	
No.	Inch	mm	Inch	lbs.	pkg.
12856	3/8"	125	4.9	.41	1
12857	3/8"	250	9.8	.57	1



1000Volt Insulated 3/8" Drive T-handle Or Breaker Bar. Insulation according to EN/IEC 60900 specification, up to 1000Volt Rated. Individually Tested. Blade chromevanadium steel hardened

vanaulum steel, nalueneu.					
Item	Омм	OAL	OAL	••	
No.	Inch	mm	Inch	lbs.	pkg.
29009	3/8	200	7.9"	.55	1
12327	3/8	216	8.5"	.68	1



Wiha Insulated 1/2" Sockets & Sets

☆1000Volt

317 Insulated 1/2" Drive Sockets -Insulation According to ASTM, DIN & CSA Specification, Up To 1000Volt. Individually Tested. CV steel, forged, oil-hardened.

resteu.	OV Sleel, lorge	u, ui-ne	aluelleu.
Item		÷-+	
No.	Inch	lbs.	pkg.
31703	5/16	.16	1
31704	11/32	.16	1
31705	3/8	.16	1
31707	7/16	.16	1
31708	1/2	.16	1
31709	9/16	.17	1
31710	5/8	.19	1
31712	11/16	.19	1
31713	3/4	.21	1
31714	13/16	.23	1
31715	7/8	.27	1
31716	15/16	.35	1
31718	1	.33	1
31720	1-1/8	.44	1
31722	1-1/4	.58	1
*Sockets m	nust be used with in	sulated ra	atchets & extensions



31790	24 Piece Insulated 1/2" Drive		
Socket Se	et - Inch CV steel, forged, oil-		
hardened	sockets. Insulated to EN/IEC 60900.		
Item No.	Set includes the following:		
31790	3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4,		
	13/16, 7/8, 15/16, 1" Sockets		
• ` •	1/2" x 125mm Extension Bar		
lbs.	1/2" x 250mm Extension Bar		
11.41	1/2" Ratchet - 260mm		
	Ins. Electrician's Knife - 50mm		
	Slotted: 3.5, 4.5, 6.5mm		
	Phillips: #1, 2, 3		
	6.3" Long Nose Pliers		
	8.0" Combo Pliers		
	6.3" Diagonal Cutters		

☆1000Volt



31792	14 Pc. Insulated 1/2" Drive Socket
Set - Inch	CV steel, forged, oil-hardened
sockets. In	sulated to EN/IEC 60900.
Item No.	Set includes the following:
31792	3/8, 7/16, 1/2, 9/16, 5/8, 11/16,
€**	3/4, 13/16, 7/8, 15/16, 1"
lbs.	1/2" x 125mm Extension Bar
7.64	1/2" x 250mm Extension Bar
	1/2" Ratchet - 190mm

Individually Tested



$\pm 1000Volt$

316	Insulated 1/2	' Drive	Sockets -
Metric	1000 Volt.		
Item		• •	
No.	mm	lbs.	pkg.
31608	8.0	.15	1
31609	9.0	.15	1
31610	10.0	.16	1
31611	11.0	.16	1
31612	12.0	.16	1
31613	13.0	.17	1
31614	14.0	.17	1
31615	15.0	.17	1
31616	16.0	.19	1
31617	17.0	.19	1
31618	18.0	.20	1
31619	19.0	.21	1
31620	20.0	.25	1
31621	21.0	.25	1
31622	22.0	.28	1
31623	23.0	.29	1
31624	24.0	.30	1
31626	26.0	.37	1
31627	27.0	.41	1
31628	28.0	.44	1
31630	30.0	.51	1
31632	32.0	.55	1



☆1000Volt

31691	24 Piece Insulated 1/2" Drive
Socket Se	t - Metric CV steel, forged, oil-
hardened	sockets. Insulated to EN/IEC 60900.
Item No.	Set includes the following:
31691	8, 9, 10, 12, 13, 14, 15, 17,
	19, 22, 24mm Sockets
↓ ↓	1/2" x 125mm Extension Bar
lbs.	1/2" x 250mm Extension Bar
11.39	1/2" Ratchet - 260mm
	Ins. Electrician's Knife - 50mm
	Slotted: 3.5, 4.5, 6.5mm
	Phillips: #1, 2, 3
	6.3" Long Nose Pliers
	8.0" Combo Pliers
	6.3" Diagonal Cutters



$\pm 1000Volt$

31694	14 Pc. Insulated 1/2" Drive			
Socket Set - Metric CV steel, forged, oil-				
hardened sockets. Insulated to EN/IEC 60900.				
Item No.	Set includes the following:			
31694	8, 9, 10, 11, 12, 13, 14,			
• ` •	17, 19, 22, 24mm			
lbs.	1/2" x 125mm Extension Bar			
7.64	1/2" x 250mm Extension Bar			
	1/2" Ratchet - 190mm			

Each tool individually tested to 10,000 volts & certified to 1000 Volt ac or 1500 Volt dc

*Sockets must be used with insulated ratchets & extensions



Wiha Insulated 1/2" Socket accessories



12853	Insi	ulated	1/2"	Drive	Ratchet,	
IEC/EN 60900 & CSA						
Chrome-Va	anadiu	im stee	el. Rev	ersible	e.	
Item		OAL	OAL	ず→		
No.	Inch	mm	Inch	lbs.	pkg.	
12853	1/2"	260	10.2	1.55	1	



lpha1000Volt

12859

1/2"

128	Insulated 1/2" Extension Bars,					
EN/IEC	60900	& CS/	4			
Chrome	vanadi.	um ste	el.			
Item		OAL	OAL	• ` •		
No.	Inch	mm	Inch	lbs.	pkg.	
12858	1/2"	125	49	45	1	

.91 1

250 9.8







12326 Insulated 1/2" Drive Breaker Bar,

IEC/EN 6	0900 8	& CSA	4			
Chrome-V	/anadii	um ste	el.			
Item		OAL	OAL	•••		
No.	Inch	mm	Inch	lbs.	pkg.	
12326	1/2"	267	10.5	1.04	1	

Wiha Insulated Hacksaw



Uses standard 12" blade

lpha1000Volt

19767 Hacksaw, With Insulated Handle Insulation According to EN/IEC 60900, DIN ISO, ASTM & CSA Specification, Up To 1000 Volt. Individually Tested. Item OAL OAL +++ No. mm Inch lbs. pkg. 19767 457mm 18.0" 1.92 1

Insulated Cable Cutters



& copper conductors

11950 Cable Cutter, With Insulated Handle. Insulation According to EN/IEC, ASTM & CSA Specification, Up To 1000 Volt. Individually Tested. Blade alloyed tool steel. Induction hardened.

Item	OAL OAL	Capacity 🕁 🕁	
No.	mm Inch	mm Inch Ibs.	pkg.
11950	500 19.6	12 1/2" 3.0	1


Insulated Pliers Wrench 1-7/8" / 49mm Jaw Capacity



1000Volt

11610 Pliers Wrench, With Insulated Handle Insulation According to EN/IEC 60900, DIN ISO 8976, ASTM F-1505 & CSA Specification, Up To 1000 Volt. Individually Tested. Chrome-vanadium steel, drop forged, oil hardened.

Item	OAL	OAL	•••	
No.	mm	Inch	lbs.	pkg.
11610	254	10.0"	1.67	1



21000Volt

40800 Large Capacity Cable Cutter, With Insulated Handle Insulation According to EN/IEC 60900, ASTM F-1505 & CSA Specification, Up to 1000 Volt. Individually Tested. Easy cutting blades, dropped forged, oil hardened. Cuts cable diameters up to 50mm. Not to be used on steel rods.

Item	OAL	OAL	Cap	acity	•••	
No.	mm	Inch	mm	Inch	lbs.	pkg.
40800	800	31.5	50	2"	8.0	1



lpha1000Volt

29250	End	Cutte	rs, With Ir	nsula	ted	
Handle. Ir	sulat	ion A	ccording t	o EN	/IEC	
60900, DIN ISO 8976, ASTM F-1505 & CSA						
Specificat	Specification. Individually Tested. Blade					
alloyed too	l steel	. Indu	ction harde	ned.		
Item	OAL	OAL	Capacity	•••		
No.	mm	Inch	mm	lbs.	pkg.	
29250	250	10	7/8"	1.1	1	



14 Tools that work for you

With Toll Free: (800) 494-6104

Wiha Insulated Ratcheting Cable Cutters

Each tool individually tested to 10,000 Volts & certified to 1000 Volt ac or 1500 Volt dc



\pm 1000Volt

119High Voltage Double-InsulatedRatcheting Cable CuttersHigh leverageratchet cable cutter with shear type blades cutsstranded and flexible copper and aluminumcable. Not for use on steel. Features built insafety release in all cutting positions, andhigh-visibility comfort grip handles.

Item	OAL	OAL	up to	Inch		.
No.	mm	Inch	MCM	Dia.	Cap.	lbs.
11960	250	10.0"	500	1.25"	32ml	1.6
11975	280	11.0"	750	2.0"	52ml	2.0




21000Volt

11980 Insulated ACSR Ratcheting

Cable Cutter Replaceable tool steel cutting blades are securely mounted for accurate cutting. Handles lock in closed position for easier storage. High leverage ratchet mechanism for best cutting performance.

Item	OAL	OAL	up to	Inch		.
No.	mm	Inch	MCM	Dia.	Cap.	lbs.
11980	353	13.9	477	1.25"	32ml	3.42

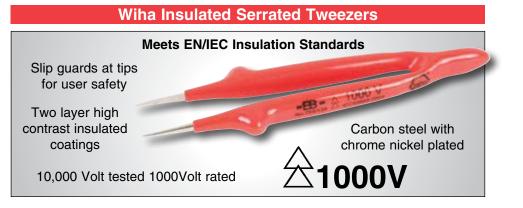



75205	Insulat	Insulated Serrated Straight					
Fine Tip T	Fine Tip Tweezers, IEC/EN 60900 & CSA						
Standards	Standards, 10,000 Volt Tested						
Item	OAL	OAL	•••	-			
No.	mm	Inch	lbs.	pkg.			
75205	130	5.0	.06	1			

☆1000Volt

75220	Insulated Serrated Straight				
Blunt Tip Tweezers, IEC/EN 60900 & CSA					
Standards	, 10,00	0 Volt	Teste	d	
Item	OAL	OAL	•••		
No.	mm	Inch	lbs.	pkg.	
75220	200	8.0	.18	1	



☆1000V	olt
75210	Insulated Serrated Straight
Blunt Tip	Tweezers, IEC/EN 60900 & CSA

Standards, 10,000 Volt Tested						
Item	OAL	OAL	• ` •	-		
No.	mm	Inch	lbs.	pkg.		
75210	130	5.0	.08	1		



lpha1000Volt

75302 Insulated Serrated Angled						
Fine Tip Tweezers, IEC/EN 60900 & CSA						
Standards	, 10,00	0 Volt	Teste	d		
Item	OAL	OAL	• •			
No.	mm	Inch	lbs.	pkg.		
75302	145	6.0	.08	1		



$\pm 1000Volt$

75215	Insulated Serrated Straight						
Blunt Tip Tweezers, IEC/EN 60900 & CSA							
Standard	Standards, 10,000 Volt Tested						
Item	OAL	OAL	•••				
No.	mm	Inch	lbs.	pkg.			
75215	145	6.0	.10	1			




<u>☆1000V</u>olt

75304 Insulated Serrated Angled Blunt Tip Tweezers, IEC/EN 60900 & CSA Standards, 10,000 Volt Tested

Standards,	10,00	U VOIL	reste	a	
Item	OAL	OAL	•••	P	
No.	mm	Inch	lbs.	pkg.	
75304	200	8.0	.16	1	




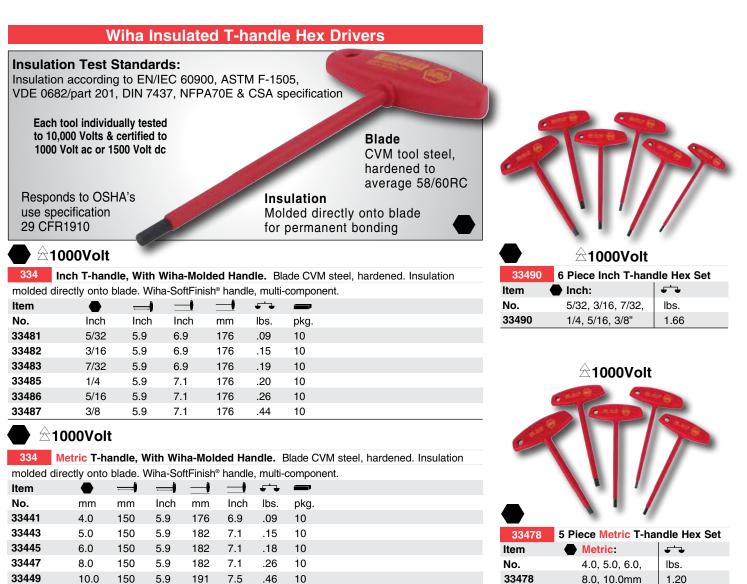

Wiha Insulated T-handle Metric Nut Drivers

7.5

10



150

336 Metric T-handle Nut Drivers, With Wiha-Molded Handle. Insulation According to ASTM F-1505, New VDE Specification 0682/part 201 and EN/IEC 60900, NFPA70E & CSA, $m \triangleq$ up to 1000Volt. Individually Tested. Blade CVM steel, hardened. Insulation molded directly onto blade. Wiha-SoftFinish® handle, multi-component.

				,				
Item	0	-	i			• ` •		
No.	mm	mm	Inch	mm	Inch	lbs.	pkg.	
33632	8.0	200	7.9	232	9.1	.15	5	
33634	10.0	230	9.0	262	10.3	.18	5	
33637	13.0	230	9.0	262	10.3	.26	5	
33641	17.0	230	9.0	268	10.6	.46	5	

NOTES:

8.0, 10.0mm

1.20



In Roll-up

Wiha Insulated TorqueControl & SlimLine Tool Sets



00

28791	8 Piece Insulated TorqueControl					
Set With Slotted & Phillips SlimLine Blades						
Set include	Set includes Insulated multi-component					
adjustable	adjustable TorqueVario-S handle, 5 SlimLine					
blades, Slir	mLine blade holder & Torque					
adjustment	tool.					
Item No.	Slotted: 3.0, 4.0, 5.5mm					
28791	Phillips: #1, 2					
	28726-Handle Range 10-50 Inch/lbs.					
• ⁺ •	lbs87					



☆1000Volt

28792 16 Piece Insulated TorqueControl Set With SlimLine Blades Certified to EN ISO 6789. BS EN 26789. ASME B107.14M. Set includes Insulated multicomponent adjustable TorqueVario-S handle, 13 SlimLine blades, SlimLine blade holder & Torque adjustment tool. Item No.

28792 SlimLine Slotted: 4.0, 5.5, 6.5mm SlimLine Phillips: #1, 2 SlimLine Terminal Xeno: #1, 2 SlimLine **TORX***: T8, T10, T15, T20 SlimLine Square: #1, 2 28727 - Handle Range 18-62 Inch/lbs. SlimLine Blade Holder July 1.27 € With Certificate of Calibration

☆1000Volt

28795 12 Pc. Insulated TorqueControl Set With SlimLine Blades Certified to EN ISO, BS EN, ASME. Set includes Insulated multi-component adjustable TorqueVario-S Nm handle, SlimLine Blade Holder Handle, 8 SlimLine blades, SlimLine blade holder & Torque adjustment tool.

Item No.

28795	SlimLine Slotted: 4.0, 5.5, 6.5mm
	SlimLine Phillips: #1, 2
	SlimLine Pozidriv®: #1, 2
	SlimLine Terminal Xeno SI/Pz: #2
	28736 - Handle Range 0.8 - 5.0 Nm
	SlimLine Blade Holder Handle
	SlimLine Blade Holder
_ ÷÷	lbs. 1.32

With Certificate of Calibration

Wiha Insulated Torque Ratchet Wrench Sets



Insulated Torque Ratchet 301 Wrenches, 1/4, 3/8, 1/2" Drives Insulated to EN/IEC 60900:2004, ASTM F1505, CSA Standards Visible reading scale for easy reading and adjustment. Locking endcap Torque adjuster for easy adjustment. Accuracy +/- 10%. Dual scale reading Ft. lbs. / Nm.

Item		OAL	OAL		•••			
No.	Inch	mm	Inch	Nm	lbs.	pkg.		
30114	1/4"	210	8.25	5-25	1.02	1		
30138	3/8"	370	14.5	5-50	2.72	1		
30152	1/2"	530	21.0	40-220	3.64	1		



1000Volt

30190 16 Pc. Insulated 3/8" Drive Ratcheting Torque Wrench & Socket Set -Inch CV steel, forged, oil-hardened sockets. Insulated to EN/IEC 60900. Item No. Inch 3/8" Drive Sockets: 1/4, 9/32, 5/16, 11/32, 3/8, 7/16 30190 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8" lbs. 3/8" x 125mm Extension Bar 8.80 3/8" x 250mm Extension Bar 3/8" Drive Ratcheting Torque Wrench - 5-50 Nm

*Sockets must be used with insulated ratchets & extensions



1000Volt

30192	16 Pc. Insulated 3/8" Drive					
Ratcheting	Ratcheting Torque Wrench & Socket Set -					
Metric C\	/ steel, forged, oil-hardened					
sockets. Insulated to EN/IEC 60900.						
Item No.	Metric 3/8" Drive Sockets:					
30192	8, 9, 10, 11, 12, 13, 14, 15, 16,					
• ` •	17, 18, 19, 20mm					
lbs.	3/8" x 125mm Extension Bar					
8.80	3/8" x 250mm Extension Bar					
	3/8" Drive Ratcheting Torque					
	Wrench - 5-50 Nm					

*Sockets must be used with insulated ratchets & extensions





Wiha Insulated TorqueControl Tools

Includes Certificate



*Requires SlimLine blade holder #28350

287 Insulated TorqueVario-S, With Window Scale Insulation A up to 1000Volt. EN/IEC 60900 EN ISO 6789, BS EN 26789, ASME B107.14M &CSA, +/- 6% Accuracy. Ergonomic multi-component handle, light & compact. Handle sizes proportioned to optimize torque range. Audible & perceptible click when torque setting has been attained.

Item	Range				
No.	Inch lbs.	Increments	mm	lbs.	pkg.
28724	5 - 18	.5 In/lbs	126-131	.43	1
28726	10 - 50	2 In/lbs	133-138	.40	1
28727	18 - 62	2 In/lbs	137-142	.69	1

287 Insulated TorqueVario-S Handle -In Newton Meter Scale

Item	Range		•••		
No.	Nm	mm	lbs.	pkg.	
28734	0.5 - 2.0	131	.45	1	
28736	0.8 - 5.0	138	.45	1	
28738	2.0 - 7.0	142	.72	1	

Each TorqueVario handle has unique serial number & certificate of calibration

$m m \simeq$ 1000Volt

28350	Ins	ulated	Slim	_ine 1	[orqu	е	
Blade Holder Chrome-vanadium-molybdenum							
steel. Thro	ugh h	ardene	d blac	k finis	h. Clic	Fix	
quick relea	se ho	lder se	curely	locks	bits.		
Item		OAL	OAL	•••			
No.	mm	mm	Inch	lbs.	pkg.		
20250	60	170	6 75	06	-1		

NOTES:



28742

lpha1000Volt Insulated TorqueVario-S, With 287 Window Scale Insulation $\,$ up to 1000Volt EN/IEC, EN ISO, BS EN, ASME & CSA, +/- 6% Accuracy. Ergonomic multi-component handle, light & compact, Handle sizes proportioned to optimize torque range. Audible & perceptible click when torgue setting has been attained. In Plastic Tube Holder Item Range No. Inch lbs. Increments mm lbs. pkg. 28750 5 - 18 .5 In/lbs 126-131 .56 28751 133-138 .74 10 - 50 2 ln/lbs 1 18 - 62 2 In/lbs 137-142 .84 28752 287 **Insulated TorqueVario-S** Handle - In Newton Meter Scale Item Range -___ No. Nm lbs. pkg. mm 28740 0.5 - 2.0 131 .64 1 28741 0.8 - 5.0 138 .56 1

Certificate

SlimLine blade holder #28350


Includes

SlimLine Blades

142 Each TorqueVario handle has unique serial number & certificate of calibration

.84 1

2.0 - 7.0



Wiha Insulated Pop-Up **SlimLine Sets** Blades High quality CV steel, through-hardened Locking blade holder securely holds blades in place for precise fastening Certified to VDE, EN ☆1000Volt Rated ISO, BS EN, ASME 10,000 Volt Tested specifications "Apprentice" 0 28393 Insulated Pop-Up "Apprentice" Blade Holder Set With SlimLine Blades Insulated cushion grip multi-component handle. Locking bit holder holds SlimLine Blades securely. Convenient rotating cap. 28393 Set includes the following blades: **Slotted:** 3.0, 4.0, 5.5, 6.5mm **Phillips:** #1, #2 🗲 lbs. .38 "Residential" ☆1000Volt wiha 28394 Insulated Pop-Up "Residential" Blade Holder Set With SlimLine Blades 28394 Set includes the following blades: **\$ Slotted:** 3.0, 4.0mm **Phillips:** #1, #2 **O** Square: #1, #2 • lbs. .38 \pm 1000Volt "MRO' wiha Œ Insulated Pop-Up "MRO" Blade 28395

Holder Set With SlimLine Blades 28395 Set includes the following blades:

- t () Slotted: 3.0, 4.0mm
- **Phillips:** #1, #2
- Terminal Xeno: #1, #2
- ---- Ibs. .38



Each SlimLine bit can be taken in and out of the holder easily and conveniently



.....

Set High quality CV steel, through hardened.

Cushion grip. Friction hold blade holder, holds

blades securely. Up to 33% narrower insulation

Slotted: 4.0, 6.5

Phillips: #1, #2

Xeno SL/PH: #2

TORX*: T15, T20

28301 - SlimLine Blade Holder

diameter then standard insulated tools.

8 Piece Insulated SlimLine Blade

Wiha Insulated SlimLine Blade Sets

1000Volt

18 Tools that work for you

0

Ē

28391

In roll up pouch

Item No.

28391

lbs. .45

÷.



m A1000Volt

Wiha Cushion Grip SlimLine Blade Holder





28301 SlimLine Blade Holder, With Wiha-SoftFinish® Handle Insulation According to VDE, ASTM F-1505 and EN/ IEC 60900, NFPA70E & CSA, ☆ up to 1000 Volt. Chrome-vanadium steel, throughhardened. Insulation molded directly onto blade. Blade holder, holds blades securely. Wiha-SoftFinish® handle, multi-component, cushion grip.

Item	0	—	—	==	==	•••
No.	Size	mm	Inch	mm	Inch	lbs.
28301	1/4"	50	2.0	160	6.3	.15





28304 SlimLine Blade Holder, With Wiha-SoftFinish® Handle. Insulation According to VDE, ASTM, EN/IEC, NFPA70E & CSA, A up to 1000 Volt. Wiha-SoftFinish® handle, multi-component, cushion grip. 0 == == +++ Item No. Size mm Inch lbs. pkg. 28304 1/4" 114 4.5 .21 1



28302 SlimLine Stubby Blade Holder, With Wiha-SoftFinish® Handle. Insulation According to VDE, ASTM, EN/IEC, NFPA70E & CSA, \Leftrightarrow up to 1000 Volt. Wiha-SoftFinish[®] handle multi-component cushion grip


nanalo, mala compenent, caemen grip.							
Item	0	==	==	•••			
No.	Size	mm	Inch	lbs.	pkg.		
28302	1/4"	57	2.2	.11	1		

SlimLine Handles Hold SlimLine Blades

33% Narrower Insulation Diameter



Slim Diameter





28390 15 Piece Insulated SlimLine Blade Set High quality CV steel, through hardened. Cushion grip. Friction hold blade holder, holds blades securely. Up to 33% narrower insulation diameter then standard insulated tools. In roll up pouch

Item No.	Slotted: 3.0, 4.0, 5.5, 6.5
28390	Phillips: #1, #2
* **	Xeno SL/PH: #1, #2
lbs.	TORX [®] : T8, T10, T15, T20
.56	Square: #1, #2
	28301 - SlimLine Blade Holder

28398 19 Piece Insulated SlimLine Blade Set High quality CV steel, through hardened. Cushion grip. Friction hold blade holder, holds blades securely. In zipper case Itom No.

item No.	
28398	Slotted: 3.0, 4.0, 5.5mm
	Phillips: #1, #2
lbs.	Xeno SL/PH: #1, #2
.64	Xeno SL/PZ: #1, 2
	TORX*: T8, T10, T15, T20
	Square: #1, 2
	Hex Metric: 3.0, 4.0, 5.0mm
	28301 - SlimLine Blade Holder

1000Volt

30 Piece Insulated SlimLine Blade 28399 Set High quality CV steel, through hardened. Friction hold blade holder, holds blades

securely. In folding wallet						
Item No.	Slotted: 2.5, 3.0, 3.5, 4.0, 5.5, 6.5mm					
28399	Phillips: #1, #2					
.	Pozidriv [®] : #1, #2					
lbs.	Xeno SL/PH: #1, #2					
1.20	Xeno SL/PZ: #1, #2					
	TORX *: T8, T9, T10, T15, T20, T25					
	Square: #1, #2					
	Hex Metric: 1.5, 2.0, 2.5, 3.0,					
	4.0, 5.0, 6.0mm					
	28301 - SlimLine Blade Holder					





have up to 33% narrower insulation diameter then standard insulated tools. In roll up pouch Slotted: 3.0, 5.5mm

ITTE DEPART

28392 12 Piece Insulated SlimLine

hardened. Cushion grip. Friction hold blade

Blade Set High quality CV steel, through

www.wihatools.com



19



283 Insulated Slotted SlimLine Blades SlimLine blades have up to 33% narrower insulation diameter then standard insulated tools.

Item	0	0	Slim	Max	Inch/	·	-
No.	mm	Inch	Dia.	Nm	lbs.	lbs.	Pkg.
28307	2.5	3/32	4.0	0.4	3.5	.02	1
28308	3.0	1/8	4.0	0.6	5.3	.02	1
28310	3.5	9/64	4.0	2.5	22.1	.02	1
28309	4.0	5/32	4.0	2.5	22.1	.02	1
28312	5.5	7/32	6.0	3.8	33.6	.02	1
28315	6.5	1/4	6.0	5.5	48.6	.02	1



SlimLine blades have up to 33% narrower								
insulation diameter then standard insulated tools.								
Item	•	Slim	Max	Inch/	÷.			
No.	Size	Dia.	Nm	lbs.	lbs.	Pkg.		
28317	1	4.0	3.8	33.7	.02	1		
28319	2	6.0	5.5	48.8	.02	1		



20 Piece Insulated SlimLine Blade 28396 Set High quality CV steel, through hardened. Friction hold, stubby cushion grip handle. In zipper case.

Slotted: 3.0, 3.5, 4.0, 5.5mm
Phillips: #1, #2
Xeno SL/PH: #1, #2
Xeno SL/PZ: #1, #2
TORX: T8, T10, T15, T20
Square: #1, #2
Hex Metric: 3.0, 4.0, 5.0mm
SlimLine Stubby Blade Holder

~~	elle PD: 2010 willio au 1010
283	Insulated Pozidriv [®] SlimLine Blades

SlimLine blades have up to 33% narrower insulation diameter then standard insulated tools. Item 🋟 Slim Max Inch/ 🕶 🖬

No.	Size	Dia.	Nm	lbs.	lbs.	Pkg.
28330	1	4.0	3.8	33.7	.02	1
28331	2	6.0	5.5	48.8	.02	1

۲	the state South
000	

203	insulat	ea ve	10 5	olled/F	0210	iriv~			
SlimLine Blades Up to 33% narrower									
insulation diameter then standard insulated tools									
Item	۲	Slim	Max	Inch/	•				
No.	Size	Dia.	Nm	lbs.	lbs.	Pkg.			
28320	1	4.0	3.8	33.6	.02	1			
28321	2	6.0	5.5	48.7	.02	1			

⊕ "	with State / BUTY BUTY II with Ministry
283	Insulated Xeno Slotted/Phillips
SlimLine	Blades Up to 33% narrower insulation
diamete	r then standard insulated tools

Item	\oplus	Slim	Мах	Inch/	• ` •	P
No.	Size	Dia.	Nm	lbs.	lbs.	Pkg.
28327	1	4.0	3.8	33.6	.02	1
28329	2	6.0	5.5	48.7	.02	1

U							
283	Insulated Square SlimLine Blades						
Up to 33% narrower insulation diameter then							
standard	standard insulated tools.						

Item	0	Slim	Max	Inch/	•	
No.	Size	Dia.	Nm	lbs.	lbs.	Pkg.
28346	1	4.0	3.8	33.6	.02	1
28347	2	6.0	5.5	48.7	.02	1

0		36511/70	I with			
283	Insulate	ed T O	RX ®SI	imLine	Bla	des
Up to 33	% narrov	ver ins	sulation	n diam	eter t	hen
standard	l insulate	d tools	S.			
Item	0	Slim	Max	Inch/	÷	
No.	Size	Dia.	Nm	lbs.	lbs.	Pkg.
28339	T8	4.0	1.3	11.5	.02	1
28344	Т9	4.0	1.3	11.5	.02	1
28340	T10	4.0	3.8	33.6	.02	1
28341	T15	6.0	5.5	48.7	.02	1
28342	T20	6.0	5.5	48.7	.02	1



5.5

48.7 .02

1

Insulated Hex Metric SlimLine 283 Blades Up to 33% narrower insulation diameter then standard insulated tools.

T25 6.0

28343

alamotor							
Item		Slim	Max	Inch/	•••	-	
No.	Size	Dia.	Nm	lbs.	lbs.	Pkg.	
28332	1.5	4.0	0.9	7.9	.02	1	
28333	2.0	4.0	1.8	15.9	.02	1	
28334	2.5	4.0	3.8	33.6	.02	1	
28335	3.0	4.0	5.5	48.7	.02	1	
28336	4.0	6.0	5.5	48.7	.02	1	
28337	5.0	6.0	5.5	48.7	.02	1	
28338	6.0	6.0	5.5	48.7	.02	1	



7 Piece SlimLine Blade Set High quality CV steel, through hardened, black finish.

Item No.	Slotted: 2.5, 3.5, 5.5mm	
28372	Phillips: #1, #2	lbs.
	Square: #1, #2	.14



Ψ		
28373	7 Piece SlimLine Blade Set	
High quality	y CV steel, through hardened,	
black finish	L.	
Item No.	Slotted: 2.5, 3.5, 5.5mm	•••
28373	Phillips: #1, #2	lbs.

	Xeno Slt/Ph: #1, #2	.14
73		lbs.
n No.	Slotted: 2.5, 3.5, 5.5mm	• •



E-SCREWDRIVER speedE[®] ELECTRIC

speedE that works for you







- Protects your material Electric fastening with a protective function to prevent damage to materials (max. 0.4 Nm = 3.5 in/lbs.)
- Increases your control Fixing by hand with full sensitivity
- Increase your speed Electronic ratchet for rapid fastening without any re-gripping
- Increases your efficiency 100% compatible with the Wiha slimLine blade system
- Maximum freedom of choice Open system with a rechargeable standard battery
- Offers you full protection slimLine blades tested at 10,000 V AC & approved for 1,000 V AC







Wiha Insulated Easy **TorqueControl Adapters**

Add more torque to your speedE with Easy TorqueControl adapters

Packaging H 2-5/8

W 10-1/4"

L 6-1/8"






283 Insulated Easy-TorqueControl Adapters Ideal for torque sensitive terminations. For use with SlimLine blades. Percentable accuracy to $\pm/-10\%$

Repeatable accuracy to +/- 10%								
Item			OAL	OAL	• ` •			
No.	Nm	In/lbs	mm	Inch	lbs.			
28366	0.8	7.0	60	2.38	.13			
28367	2.0	17.7	60	2.38	.13			
28368	2.5	23.1	60	2.38	.13			
28369	2.8	24.7	60	2.38	.13			
28371	4.0	35.4	60	2.38	.13			

32480	13 Pc. speedE Electric Screwdriver With SlimLine	Blades					
Certified t	Certified to EN ISO, BS EN, ASME. Set includes speedE electric 0.4 Nm handle,						
8 Insulate	8 Insulated SlimLine blades, 2 Li-Ion rechargeable batteries & wall plug adapter/charger.						
Item	speedE Screwdriver: Handle Range 0.4 Nm						
No.	Insulated SlimLine Blades Include:	€ ⁺ €					
32480	SlimLine Slotted: 3.5, 5.5mm	lbs.					
	SlimLine Phillips: #1, #2	2.14					


SlimLine Square: #1, #2 SlimLine Terminal Xeno SI/Ph: #1, #2

*speedE electric screwdriver is only insulated when used with Wiha SlimLine blades





Wiha Insulated SlimLine Screwdrivers

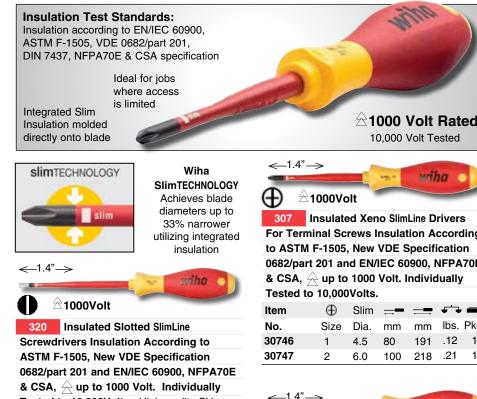

Tested to 10,000Volts. High quality CV steel, through hardened. SlimLine blades have up to 33% narrower insulation diameter then standard insulated tools. Wiha-SoftFinish® handle, multi-component, cushion grip.

Item	0	0	Slim	—		•••	
No.	mm	Inch	Dia.	mm	mm	lbs.	Pkg.
32046	3.5	9/64	3.5	100	204	.07	1
32049	4.0	5/32	4.0	100	211	.12	1
32052	4.5	3/16	4.5	125	211	.14	1
32055	5.5	7/32	5.5	125	243	.21	1
32058	6.5	1/4	6.5	150	268	.25	1

_1 4" __> 21000Volt

321 Insulated Phillips SlimLine Screwdrivers Insulation According to ASTM F-1505, New VDE Specification 0682/part 201 and EN/IEC 60900, NFPA70E & CSA, ightarrow up to 1000 Volt. Individually Tested to 10 000Valte

resteu to	10,000	JVOILS.				
Item	0	Slim	—	—		J
No.	Size	Dia.	mm	mm	lbs. Pkg.	
32145	1	4.5	80	204	.12 1	
32146	2	6.0	100	211	.21 1	

m lpha1000 Volt Rated

For Terminal Screws Insulation According 0682/part 201 and EN/IEC 60900, NFPA70E

Item	\oplus	Slim	<u> </u>		.	-
No.	Size	Dia.	mm	mm	lbs.	Pkg.
30746	1	4.5	80	191	.12	1
30747	2	6.0	100	218	.21	1

wiha

wiho

☆1000Volt

358 Insulated Square SlimLine Drivers Insulation According to ASTM F-1505, New VDE Specification 0682/part 201 and EN/ IEC 60900, NFPA70E & CSA, A up to 1000 Volt. Individually Tested to 10,000Volts. Clim

nem	U U	SIIIII			* *	
No.	Size	Dia.	mm	mm	lbs.	Pkg.
35844	1	4.0	100	218	.12	1
35845	2	4.5	125	243	.19	1

1.4"

☆1000Volt

325 Insulated Security TORX[®] SlimLine **Drivers Insulation According to ASTM, New** VDE Specification 0682/part 201 and EN/ IEC 60900, NFPA70E & CSA, 🔶 up to 1000 Volt. Individually Tested to 10,000Volts. Item Θ 5 ___ Pkg. No. Size lbs. mm mm .08 1 32512 T10s 100 204 .12 T15s 100 211 1 32513 .12 1 32514 T20s 100 211 T25s 125 243 .18 1 32515 .21 T27s 125 243 1 32517 .21 T30s 125 243 1 32518 T40s 150 268 .26 1 32519



32198 11 Piece Insulated SlimLine Slotted, Phillips, Xeno & Square Screwdrivers. Insulation According to ASTM F-1505, New VDE Specification 0682/part 201 and EN/IEC 60900, NFPA70E & CSA, 4arrow up to 1000 Volt. Individually Tested to 10,000Volts. High quality CV steel, through hardened. SlimLine blades have up to 33% narrower insulation diameter then standard insulated tools. Wiha-SoftFinish® handle, multi-component, cushion grip. Slotted: 3.5, 4.0, 4.5, 5.5, 6.5mm Item No. 32198 Phillips: #1, 2 Square: #1, 2



Xeno: #1, 2

lpha1000Volt

lbs. 1.75

32197 8 Piece Insulated SlimLine Slotted, Phillips & Square Screwdrivers. Insulation According to ASTM F-1505, New VDE Specification 0682/part 201 and EN/ IEC 60900, NFPA70E & CSA, 🔶 up to 1000 Volt. Individually Tested to 10,000Volts. High quality CV steel, through hardened. SlimLine blades have up to 33% narrower insulation diameter then standard insulated tools. Wiha-SoftFinish® handle, multicomponent, cushion grip. Item No. Slotted: 3.5, 4.0, 4.5, 5.5mm 32197 Phillips: #1, 2 Square: #1, 2 ✓→ lbs. 1.18



Wiha Insulated SlimLine Screwdriver Sets



321966 Piece Insulated SlimLineSlotted, Phillips & Square Screwdrivers.Insulation According to ASTM F-1505,New VDE Specification 0682/part 201 andEN/IEC 60900, NFPA70E & CSA, <a>upto 1000 Volt. Individually Tested to10,000Volts. High quality CV steel, throughhardened. SlimLine blades have up to 33%narrower insulation diameter then standardinsulated tools. Wiha-SoftFinish® handle, multi-component, cushion grip.

Item	‡ 🌗 Slotted: 4.5, 6.5mm	
No.	Phillips: #1, #2	lbs.
32196	O Square: #1, #2	1.15




lpha1000Volt

Θ

Wiha Slim TECHNOLOGY Achieves blade diameters up to 33% narrower utilizing Wiha integrated insulation


↓ lbs. 1.18





30770 2 Pc. Insulated SlimLine Terminal Block Xeno Slotted/Phillips Screwdrivers. Meets ASTM, VDE, EN/IEC, NFPA70E & CSA Specs, Tested to 10,000Volts. High quality CV steel, through hardened. SlimLine blades have up to 33% narrower insulation diameter then standard insulated tools. Item No. Txeno: #1x80mm

30770



22189 2 Pc. Insulated SlimLine Slotted & Phillips Screwdrivers. Meets ASTM, VDE, EN/IEC, NFPA70E & CSA Specs, Individually Tested to 10,000Volts. High quality CV steel, through hardened. SlimLine blades have up to 33% narrower insulation diameter then standard insulated tools.

 Item No.
 \$ I Slotted: 4.5x125mm

 32189
 Phillips: #2x100mm

 Ibs. .37



3207930 Pc. Insulated SlimLine Slotted& Phillips Screwdriver Display. MeetsASTM, VDE, EN/IEC, NFPA70E & CSASpecs, Tested to 10,000Volts. SlimLineblades have up to 33% narrower insulationdiameter then standard insulated tools. Highquality CV steel, through hardened.Item6 of each:

No.	Slotted: 3.5, 4.5, 5.5mm
32079	Phillips: #1, #2

Insulated PicoFinish Precision Screwdrivers



320 Insulated Slotted PicoFinish Screwdrivers. Individually Tested Protective

Insulation	insulation 1000volt AC, VDE & GS Tested.					
Item	0	0	=	==	.	
No.	mm	Inch	mm	mm	lbs.	pkg.
32000	1.5	.06	40	154	.05	1
32001	2.0	.08	40	154	.07	1
32002	2.5	.10	60	160	.07	1
32003	3.0	.12	60	160	.08	1
32004	3.5	.14	60	160	.08	1



32108

1

321 Insulated Phillips PicoFinish Screwdrivers. Individually Tested Protective

Insulation	n 1000Vo	lt AC,	VDE 8	GS T	ested.
Item	•	•	→	• •	-
No.	Size	mm	mm	lbs.	pkg.
32106	00	40	154	.05	1
32107	0	60	160	.07	1

60

160

.08



32088	8 Piece Slotted & Phillips				
PicoFinish Set High quality CV steel, through					
hardened, I	black finish	•-•			
Item No.	Slotted: 1.5, 2.0, 2.5, 3.0, 3.5	lbs.			
32088	Phillips: #00, #0, #1	.35			

Individually Tested Protective Insulation 1000Volt AC, VDE & GS Tested



Rotating cap for precise turning and control with fingertip

1

320855 Piece Slotted & PhillipsPicoFinish SetHigh quality CV steel, through
hardened, black finishItem No.Slotted: 1.5, 2.5, 3.532085Phillips: #0, #1



#32892

Wiha Insulated Screwdrivers with SoftFinish® Cushion Grip Handle

Insulation Test Standards: Each tool individually tested to 10,000 Volts & Insulation according to EN/IEC 60900, certified to 1000 Volt ac or 1500 Volt dc ASTM F-1505, New VDE 0682/part 201, SoftFinish® handle Solid molded core DIN 7437, NFPA70E & CSA with soft outer cushion grip. Responds to OSHA's use 40% more torque than conventional handles specification 29 CFR1910 Insulation Molded directly onto the blade for permanent bonding Blade CVM tool steel, hardened Ż1000V to average 58/60RC

Slotted Screwdriver, With Wiha-SoftFinish® Handle. Insulation According to

_

mm

164

179

204

204

211

211

236

261

286

311

243

293

268

268

299

318

ASTM F-1505, New VDE Specification 0682/part 201 and EN/IEC 60900, NFPA70E & CSA,

Inch

3.0

3.0

4.0

4.0

4.0

4.0

5.0

6.0

7.0

8.0

5.0

7.0

6.0

6.0

7.0

8.0

—

mm

60

75

100

100

100

100

125

150

175

200

125

175

150

150

175

200

1000Volt

ightarrow up to 1000 Volt. Individually Tested.

10

Inch

.078

.098

.118

.139

.157

.177

.177

.177

.177

.177

.216

.216

.236

.255

.315

.393

10

Inch

5/64

3/32

1/8

9/64

5/32

3/16

3/16

3/16

3/16

3/16

7/32

7/32

1/4

5/16

3/8

15/64

10

mm

2.0

2.5

3.0

3.5

4.0

4.5

4.5

4.5

4.5

4.5

5.5

5.5

6.0

6.5

8.0

10.0



Inch

6.5

7.1

8.0

8.0

8.3

8.3

9.3

10.2

11.2

12.3

9.5

11.5

10.6

10.6

11.8

12.5

lbs.

.05

.06

.07

.07

.12

.12

.12

.14

.13

.15

.15

.21

.21

.21

.34

.39

pkg.

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

Item

No.

32005

32010

32012

32015

32017 32023

32024

32027

32025

32028

32031

32026

32034

32039

32042

32045

320



page 32

UÇ:	☆1000Volt
32105	2 Piece Slotted & Phillips Set
Item	\$ () Slotted: 5.5
No.	Phillips: #2
32105	√ ↓ lbs50



VV	☆1000Volt
33532	2 Piece Slotted & Phillips Set
Item	\$ () Slotted: 6.0
No.	Phillips: #2
33532	↓ ↓ lbs50



Phillips Screwdriver, With Wiha-SoftFinish® Handle. Insulation According to ASTM F-1505, New VDE Specification 0682/part 201 and EN/IEC 60900, NFPA70E & CSA, Aup to 1000 Volt. Individually Tested

1000 001.	maiviauc	my ica	icu.						
Item	0	—				•••			
No.	Size	mm	Inch	mm	Inch	lbs.	pkg.		
32100	0	60	2.4	164	6.5	.06	10		
32101	1	80	3.0	191	7.5	.12	10		
32102	2	100	4.0	218	8.6	.20	10		
32103	3	150	6.0	268	10.6	.34	10		
32104	4	200	8.0	318	12.5	.39	10		



23



☆1000Volt 00 32092 6 Piece Slotted & Phillips Set Item No. **\$ Slotted:** 3.5, 4.5, 6.5 **Phillips:** #1, 2, 3 32092 **↓** lbs. 1.38

lpha1000Volt 0 32094 13 Piece Slotted & Phillips Set Item No. Slotted: 2.0, 2.5, 3.0, 3.5, 4.5, 32094 5.5, 6.5, 8.0, 10.0mm

Wiha Insulated Screwdriver Sets

Phillips: #0, 1, 2, 3 🕶 lbs. 2.3

$\ge 1000Volt$



$\mathbf{0}\mathbf{0}\mathbf{0}$

32192	14 Piece Slot/Phil/Inch Nut
Drivers &	Pliers/Cutters Set
Item No.	Slotted: 3.0, 4.5, 6.5mm
32192	Phillips: 1, 2
↓ ↓	Nut Drivers Inch: 1/4, 5/16,
lbs.	11/32, 3/8, 1/2"
5.5	8.0" Combo Pliers,
	6.3" Diagonal Cutters
	6.3 & 8.0" Long Nose Pliers/Cutters



☆1000Volt

32093 10 Piece Slotted & Phillips Set Item No. Slotted: 2.0, 2.5, 3.0, 3.5, 4.5, 6.5 Phillips: #0, 1, 2, 3 32093 **↓** lbs. 1.63

☆1000Volt



32190 15 Piece Slotted, Phillips & Inch **Nut Drivers Set** Item No. Slotted: 2.0, 2.5, 3.0, 3.5, 4.5, 6.5, 8.0mm 32190 <u>, - ,</u> Phillips: #1, 2, 3 lbs. Nut Drivers Inch: 1/4, 5/16, 5.9 3/8, 7/16, 1/2"



🖵 lbs. .92

set in blow molded tray Ŭ O ⊕ $m
m \simeq$ 1000Volt

Tool box

32095	19 Piece Slotted, Phillips,
Square, X	eno Screwdriver Set
Insulated S	Screwdriver set in a light weight tool
box tray.	
Item No.	Slotted: 2.5, 3.0, 3.5, 4.0, 4.5,
32095	5.5, 6.0, 6.5, 8.0, 10.0mm
	Phillips: #0, #1, #2, #3
€	Square: #1, #2
lbs.	Xeno Terminal: #1, #2
4.92	Cat. III Voltage Detector -
	(Battery Operated)



Wiha Insulated Hex Metric Screwdrivers

wiha 💿 **☆1000Volt**

323 Hex Metric Screwdriver, With Wiha-SoftFinish[®] Handle

Insulation According to ASTM F-1505, New VDE Specification 0682/part 201 and EN/IEC 60900, NFPA70E & CSA, 六 up to 1000 Volt. Individually Tested Blade high alloy CVM steel, hardened, black finish. Insulation molded directly onto blade. Wiha-SoftFinish® handle, multi-component, cushion arip

mail component, cushion grip.								
Item		 =	 =			÷.		
No.	Size	mm	Inch	mm	Inch	lbs.	pkg.	
32302	2.5	75	3.0	179	7.0	.06	10	
32303	3.0	75	3.0	179	7.0	.08	10	
32304	4.0	75	3.0	186	7.3	.12	10	
32305	5.0	75	3.0	186	7.3	.15	10	
32306	6.0	100	3.9	218	8.6	.24	10	
32308	8.0	100	3.9	218	8.6	.34	10	

Wiha Insulated **TORX®** Screwdrivers



325 TORX[®] Screwdriver, With Wiha-SoftFinish[®] Handle

Insulation According to ASTM F-1505, New VDE Specification 0682/part 201 and EN/IEC 60900, NFPA70E and CSA, igtriangleq up to 1000 Volt. Individually Tested. Blade high alloy cvm steel hardened black finish Insulation molded directly onto blade

steel, nardene	,	1111311. 11	Isulatio	minolue	u unecny		aue.
Item	0	—	—	==		€	
No.	Size	mm	Inch	mm	Inch	lbs.	pkg.
32505	T5	60	2.4	164	6.5	.06	10
32511	T6	60	2.4	164	6.5	.06	10
32516	T7	60	2.4	164	6.5	.06	10
32521	Т8	60	2.4	164	6.5	.06	10
32526	Т9	60	2.4	164	6.5	.06	10
32531	T10	60	2.4	164	6.5	.06	10
32536	T15	80	3.0	191	7.5	.12	10
32541	T20	80	3.0	191	7.5	.12	10
32546	T25	80	3.0	198	7.8	.17	10
32551	T27	100	4.0	218	8.6	.20	10
32556	T30	100	4.0	218	8.6	.20	10
32561	T40	150	6.0	274	10.8	.30	10
32566	T45	150	6.0	274	10.8	.35	10

Wiha Insulated Square Tip Screwdrivers

wiho

1000Volt

Square Tip Screwdriver, With 358 Wiha-SoftFinish® Handle Insulation According to ASTM, VDE, EN/IEC, NFPA70E and CSA, A up to 1000 Volt. Individually Tested. Blade high alloy CVM steel, hardened, black finish.

Sidon inite							
Item	0	 -	=			.	P
No.	Size	mm	Inch	mm	Inch	lbs.	pkg.
35811	1	100	4.0	210	8.2	.12	10
35812	2	150	6.0	268	10.5	.19	10




☆1000Volt




32366	6 Piece Insulated Hex Metric					
Screwdriv	er Set					
Item No.						
32366	Hex Metric:					
	2.5, 3.0, 4.0, 5.0, 6.0, 8.0mm					
÷	→ lbs. 1.06					



32590	6 Piece TORX [®] Set
Item No.	TORX:
32590	T8, T9, T10, T15, T20, T25
	↓ ↓ lbs83









Wiha Insulated Pozidriv[®] Screwdrivers

☆1000Volt

wiha

324 Pozidriv[®] Screwdriver, With Wiha SoftFinish[®] Handle. Insulation According to ASTM F-1505, VDE, 0682/part 201, EN/IEC 60900, NFPA70E & CSA specification.

Individually	y Tested.						
Item	\mathbf{O}	—			€		
No.	Size	mm	mm	Inch	lbs.	pkg.	
32400	0	60	164	6.5	.11	10	
32401	1	80	191	7.5	.13	10	
32402	2	100	218	8.6	.23	10	
32403	3	150	267	10.5	.30	5	

Insulated Terminal Block Xeno Screwdrivers



Combination Slotted/Phillips Terminal Block Drivers Slotted/Phillips or

Slotted/Pozidriv®

☆1000Volt

wiha

Slotted/Phillips

Combination Terminal Block Xeno 307 Screwdriver, With Wiha SoftFinish® Handle. Insulation According to ASTM F-1505, VDE, 0682/part 201, EN/IEC 60900, NFPA70E & CSA specification. Individually Tested. Blade CVM steel, hardened, black finish. Insulation molded directly onto blade. Wiha-SoftFinish® handle, multi-component, cushion grip. For combination Slotted/Phillips head terminal screws.

Item	\oplus	—	==		
No.	Size	mm	mm	Inch	lbs. pkg.
30700	1	80	191	7.5	.13 10
30701	2	100	218	8.6	.23 10

Cat. IV Voltage Detector -**Battery Operated**



☆1000Volt

25505 Battery Operated Voltage

Detector Tests 50-1000 Volts. Category IV, CE IEC 61010-1 With audible sound and light warnings. (Requires 2 AAA batteries)

Item	==		•••			
No.	mm	Inch	lbs.	pkg.		
25505	146	5.75	.13	1		

Slotted/Pozidriv®

Combination Terminal Block Xeno 307 Screwdriver, With Wiha SoftFinish® Handle. Insulation According to ASTM F-1505, VDE, 0682/part 201, EN/IEC 60900, NFPA70E & CSA specification. Individually Tested. Blade CVM steel, hardened, black finish. Insulation molded directly onto blade. Wiha-SoftFinish® handle, multi-component, cushion grip. For combination Slotted/Pozidriv® head terminal screws.

wiha

Item	()	 -	==		+ `+ =
No.	Size	mm	mm	Inch	lbs. pkg.
30711	1	80	191	7.5	.12 10
30712	2	100	218	8.6	.21 10


Insulated Single-Pole Voltage Detector



Detector. 110-250Volts. Insulation According To DIN 57860/6 And DIN VDE 0680-6. GS Tested. Blade CVM steel, hardened, nickelplated. Insulation molded directly onto blade. Amber LED light. 10,000Volt tested.

Item	10	—	—		, , , , , , , , , , , , , , , , , , ,
No.	mm	mm	mm	Inch	lbs. pkg.
25511	3.0	65	145	5.7	.04 1

Wiha Insulated Screwdrivers

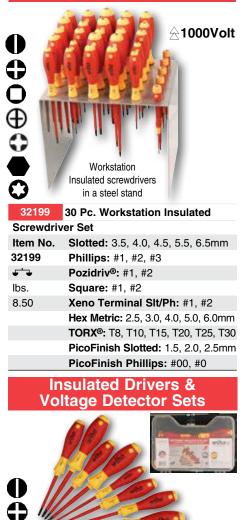

\oplus	A 1000Volt
32089	9 Pc. Slotted, Phillips, Square &
Voltage De	tector Set In Molded Carry Case
Item	Slotted: 3.5, 4.0, 4.5, 5.5mm
No.	Phillips: #1, #2
32089	Xeno Slt/Ph: #1, #2
	Ins. Single Pole Voltage Detector
	lbs. 1.81



32087 7 Pc. Slotted, Phillips, Square & Voltage Detector Set Slotted: 4.0, 5.5, 6.5mm Item No. Phillips: #1, #2 32087 Square: #2 Ins. Single Pole Voltage Detector + lbs. 1.36



Wiha Insulated Metric & Inch Nut Drivers



lpha1000Volt

322 Metric Nut Drivers, With Wiha-SoftFinish® Handle Insulation According to ASTM F-1505, New VDE Specification 0682/part 201 and EN/IEC 60900, NFPA70E & CSA, △ up to 1000 Volt. Individually Tested. Blade CVM steel, hardened. Insulation molded directly onto blade, Deep drawn 1" socket, Wiha-SoftFinish® handle, multi-component.

blaue.	Deep ulawii i	SUCKEL.	wina-Son	illisii lla	nule, mu	ani-compone	5111.	
Item	0	—			€			
No.	mm	mm	mm	Inch	lbs.	pkg.		
32206	4.0	125	236	9.3	.15	10		
32209	5.0	125	236	9.3	.16	10		
32212	5.5	125	236	9.3	.16	10		
32215	6.0	125	236	9.3	.16	10		
32218	7.0	125	243	9.6	.25	10		
32221	8.0	125	243	9.6	.25	10		
32224	9.0	125	243	9.6	.25	10		
32227	10.0	125	243	9.6	.27	10		
32230	11.0	125	243	9.6	.37	10		
32233	12.0	125	243	9.6	.38	10		
32236	13.0	125	243	9.6	.39	10		
32238	14.0	125	243	9.6	.39	10		
32239	15.0	125	243	9.6	.40	10		
32240	16.0	125	243	9.6	.42	10		
32241	17.0	125	243	9.6	.44	10		

322	Inch Nut Driv	/ers, Wi	th Wiha-So	oftFinish	n [®] Handl	е	
Item	0	—	—		•••		
No.	Inch	Inch	mm	Inch	lbs.	pkg.	
32255	5/32	5.0	236	9.3	.15	10	
32258	3/16	5.0	236	9.3	.15	10	
32261	7/32	5.0	236	9.3	.16	10	
32264	1/4	5.0	243	9.6	.24	10	
32267	5/16	5.0	243	9.6	.25	10	
32268	11/32	5.0	242	9.6	.26	10	
32270	3/8	5.0	243	9.6	.26	10	
32273	7/16	5.0	243	9.6	.36	10	
32276	1/2	5.0	243	9.6	.39	10	
32278	9/16	5.0	243	9.6	.39	10	
32280	5/8	5.0	243	9.6	.41	10	






$ \pm 1000Volt $	



32291	5 Pc. Nut Driver Set - Metric Sizes		
Item	Metric:	• ` •	
No.	6.0, 7.0, 8.0, 9.0, 10.0mm	lbs.	
32291		1.36	



• ng		
0	☆1000Vo l	lt
32292	5 Pc. Nut Driver S	Set - Inch Sizes
Item	Inch:	***
No.	7/32, 1/4, 5/16,	lbs.
32292	3/8, 1/2"	1.52









1000Volt 32886 17 Pc. Insulated Pop-Up Bit

Holder & Pliers/Cutters Set

High quality CV steel, through hardened. Cushion grip handle with magnetic holder to securely hold bits. Pliers & Cutters additionally induction hardened. Hard chrome finish for long lasting corrosion protection. Two component Insulated soft grip handle.

Item No.	Set Includes 1/4" Insert Bits:		
32886	Slotted: 4.5, 5.5, 6.0mm		
Phillips: #0, 1, 2, 3			
	Square: #1, 2, 3		
	TORX [®] : T15, T20, T25		
• ` •	8.0"/200mm Long Nose Pliers		
lbs.	8.0"/200mm High Lev. Cutters		
3.72	9.5"/245mm Lineman's Pliers		



32990 17 Pc. Insulated Pop-Up Bit Holder & Industrial Pliers/Cutters Set High quality CV steel, through hardened. Cushion grip handle with magnetic holder to securely hold bits. Pliers & Cutters drop-forged from special tool steel. Industrial Soft grip ergonomically designed handle body. In belt pack pouch

Item No.	Set Includes 1/4" Insert Bits:
32990	Slotted: 4.5, 5.5, 6.0mm
•••	Phillips: #0, 1, 2, 3
lbs.	Square: #1, 2, 3
3.60	TORX*: T15, T20, T25
	8.0"/200mm Long Nose Pliers
	8.0"/200mm High Leverage Cutters
	9.5"/245mm Lineman's Pliers



m1000Volt


32873 3 Piece Insulated Pliers/Cutters In Belt Pack Pouch Tools meet EN/IEC, ASTM, VDE, NFPA70E & CSA standards. Pliers chrome finish for long lasting corrosion protection. Soft grip ergo designed handle body, safety slip guard.

Item No.	Insulated Pliers & Cutters
32873	6.3" / 160mm Diagonal Cutters
	8.0" / 200mm Long Nose Pliers
	8.0" / 200mm Combination Pliers
	lbs. 2.12

Insulated Belt Packs

Insulation Test Standards: Insulation according to EN/IEC 60900, ASTM F-1505, New VDE 0682/part 201, DIN 7437, NFPA70E & CSA







Wiha Insulated Belt Pack Pouch Sets





1000Volt

32871 3 Piece Insulated Pliers/Cutters & Multi-Bit Set In Belt Pack Pouch Tools meet EN/IEC, ASTM, VDE, NFPA70E & CSA standards. Pliers chrome finish for long lasting corrosion protection. Soft grip ergo designed handle body, safety slip guard. Insulated multi-bit screwdriver includes Slotted, Phillips & Square bits.

Item No.	Pliers/Cutters & Multi-Bit Set
32871	6.3" / 160mm Diagonal Cutters
	8.0" / 200mm Long Nose Pliers
	Set Includes Bit Holder &
	The Following Bits:
	Slotted: 4.5, 6.5mm
	Phillips: #1, 2
	Square: #1, 2
.	/ lbs. 1.67



1000Volt

32875 5 Pc. Insulated Pliers/Cutters & SlimLine Screwdrivers In Belt Pack Pouch Tools meet EN/IEC, ASTM, VDE, NFPA70E & CSA standards. Pliers chrome finish for long lasting corrosion protection. Soft grip ergo designed handle body, safety slip guard. Insulated cushion grip drivers, multi-component. Blade CVM tool steel, hardened.

Item No.	Insulated Pliers/Cutters
32875	9.0" / 225mm Lineman's Pliers
	8.0" / 200mm Long Nose Pliers
	Insulated SlimLine
	SoftFinish [®] Screwdrivers:
	Slotted: 4.5, 6.5mm • Phillips: #2
€	lbs. 2.26



☆1000Volt

32872 5 Piece Insulated Pliers/Cutters & Screwdrivers In Belt Pack Pouch Tools meet EN/IEC, ASTM, VDE, NFPA70E & CSA standards. Pliers chrome finish for long lasting corrosion protection. Soft grip ergo designed handle body, safety slip guard. Insulated cushion grip drivers, multi-component. Blade CVM tool steel, hardened.

Item No. Insulated Pliers/Cutters 32872 6.3" / 160mm Diagonal Cutters 8.0" / 200mm Long Nose Pliers Insulated SoftFinish® Drivers: Slotted: 3.0, 4.5mm • Phillips: #2 **↓** lbs. 1.77



Wiha Insulated Master Electrician's Tools

Insulation Test Standards: Insulation according to EN/IEC 60900, ASTM F-1505, New VDE 0682/part 201, DIN 7437, NFPA70E & CSA

32800 80 PC. Insulated Master Electrician's Tool Set In Rolling Water Tight Traveling Tool Box - 10,000Volt Tested, 1000Volt Rated

mater right rit	avening root box	
Item# 32800	Set Includes:	 + lbs. 41.5
6.3" Long Nose	Pliers	6.3" Diagonal Cutters
8.0" Long Nose	Pliers	8.0" High Leverage Cutters
6.3" Bent Nose	Pliers	6.3" Cable Cutters
6.3" Long Flat N	Nose Pliers	6.3" Stripping Pliers
9.0" Combo Plie	ers/Crimpers	8.0" Adjustable Wrench
Insulated Inch	Sockets: 1/2, 9/16,	Insulated Slotted: 2.5, 3.0, 3.5,
5/8, 11/16, 3/4,	13/16, 7/8"	4.0, 4.5, 5.5, 6.0, 6.5, 8.0, 10.0mm
Insulated Metri	ic Sockets:	Insulated Phillips: #0, 1, 2, 3
13.0, 14.0, 15.0	, 17.0, 19.0,	Insulated Xeno Slotted/Phillips
20.0, 22.0mm		Terminal: #1, 2
Insulated Ratc	het 3/8" Drive	Insulated Square: #1, 2
Insulated 4.9"	Extension 3/8" Dr.	Insulated TORX: T6, T7, T8, T9,
Insulated Inch	Nut Drivers:	T10, T15, T20, T25, T30
7/32, 1/4, 5/16,	3/8, 7/16"	Insulated L-key: 10mm
Insulated Metri	ic Nut Drivers:	Insulated L-key: 1/2"
5.0, 5.5, 6.0, 7.0, 8.0,		Insulated Cable Knife: 50mm
10.0, 13.0mm		Insulated Folding Ruler In/MM
Insulated T-handle Inch Hex:		Cat. IV Voltage Detector-
5/32, 3/16, 7/32	, 1/4, 5/16, 3/8"	50-1000 Volt, Battery Operated
Insulated T-ha	ndle Metric Hex:	
4.0, 5.0, 6.0, 8.0	Omm	



Tools that work for you

Insulated Torx T7

Insulated Torx T8

Insulated Torx T9

Insulated Torx T10

Insulated Torx T15

Insulated Torx T20

Insulated Torx T25

Insulated Torx T30

Insulated Square #1

Insulated Square #2

Insulated Socket 1/2"

Insulated Socket 9/16"

Insulated Socket 5/8"

Insulated Socket 3/4"


Insulated Socket 7/8"

Insulated Socket 11/16"

Insulated Socket 13/16"

30

Wiha 1000Volt Insulated Tool Sets - Comfort Grip Handles

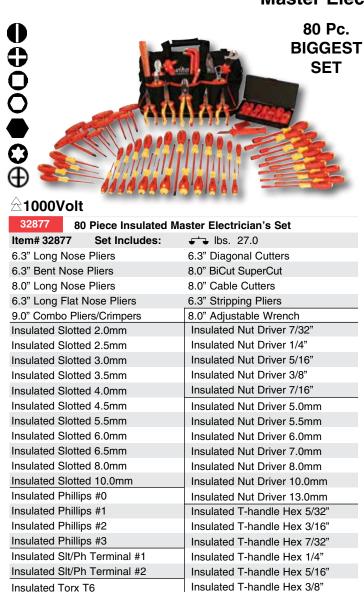

Insulated T-handle Hex 4.0mm

Insulated T-handle Hex 5.0mm

Insulated T-handle Hex 6.0mm

Insulated T-handle Hex 8.0mm

Insulated Cable Knife 50mm

Insulated Ratchet 3/8" Dr.

Insulated 4.9" Extension

Insulated Socket 13mm

Insulated Socket 14mm

Insulated Socket 15mm

Insulated Socket 17mm

Insulated Socket 19mm

Insulated Socket 20mm

Insulated Socket 22mm

Insulated Folding Ruler In/MM

Insulated L-key 10mm

Insulated L-key 1/2"

Master Electrician's Sets



32876 66 Pc. Master Electrician's Set. Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA, lpha up to 1000 volt. Individually Tested. Pliers drop-forged from special tool steel, individually high frequency induction hardened, chrome/nickel plated mirror-polished Cushion Grip Insulated handles

plated, mirror-polished. Cushion Grip Insulated handles.				
Item# 32876 Set Includes:	 ↓lbs. 21.5			
8.0" Long Nose	6.3" Side Cutters			
6.3" Long Flat Nose	8.0" BiCut SuperCut			
9.0" Combo Pliers/Crimpers	6.3" Stripping Pliers			
8.0" Cable Cutters	8.0" Adjustable Wrench			
Insulated Nut Driver 1/4"	Insulated Slotted 2.0mm			
Insulated Nut Driver 5/16"	Insulated Slotted 2.5mm			
Insulated Nut Driver 11/32"	Insulated Slotted 3.0mm			
Insulated Nut Driver 3/8"	Insulated Slotted 4.0mm			
Insulated Nut Driver 7/16"	Insulated Slotted 4.5mm			
Insulated T-handle Hex 4.0mm	Insulated Slotted 5.5mm			
Insulated T-handle Hex 5.0mm	Insulated Slotted 6.0mm			
Insulated T-handle Hex 6.0mm	Insulated Slotted 8.0mm			
Insulated T-handle Hex 8.0mm	Insulated Slotted 10.0mm			
Insulated T-handle Hex 5/32"	Insulated Phillips #0			
Insulated T-handle Hex 3/16"	Insulated Phillips #1			
Insulated T-handle Hex 7/32"	Insulated Phillips #2			
Insulated T-handle Hex 1/4"	Insulated Phillips #3			
Insulated T-handle Hex 5/16"	Insulated Torx T8			
Insulated T-handle Hex 3/8"	Insulated Torx T10			
Insulated Hex L-key 10.0mm	Insulated Torx T15			
Insulated Hex L-key 1/2"	Insulated Torx T20			
Insulated Socket 1/2"	Insulated Torx T25			
Insulated Socket 9/16"	Insulated Torx T30			
Insulated Socket 5/8"	Insulated Square #1			
Insulated Socket 11/16"	Insulated Square #2			
Insulated Socket 3/4"	Insulated Slt/Ph Terminal #1x80			
Insulated Socket 13/16"	Insulated Slt/Ph Terminal #2x100			
Insulated Socket 7/8"	Insulated Cable Knife 50mm			
Insulated Socket 8.0mm	Insulated Extension 4.9"			
Insulated Socket 10.0mm	Insulated Ratchet 3/8" Drive			
Insulated Socket 13.0mm	Insulated Socket 17.0mm			
Insulated Socket 14.0mm	Insulated Socket 19.0mm			
Insulated Socket 15.0mm	Insulated Socket 22.0mm			





Wiha 1000Volt Insulated Tool Sets - Comfort Grip Handles



32874 50 Piece Insulated Tool Set. Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA, ightarrow up to 1000 volt. Individually Tested. Pliers drop-forged from special tool steel, individually high frequency induction hardened, chrome/nickel plated, mirror-polished. Cushion Grip Insulated handles. Canvas tool bag.

Item# 32874 Set Includes:	↓ ↓ lbs. 19.8	
6.3" Long Nose Pliers	6.3" Side Cutters	
8.0" Long Nose Pliers	8.0" BiCut SuperCut	
6.3" Combination Pliers	6.3" Stripping Pliers	
9.0" Combo Pliers/Crimpers	8.0" Adjustable Wrench	
10.0" Water Pump Pliers	Battery Operated Voltage Detector	
Slotted: 2.0, 2.5, 3.0, 3.5, 4.0, 4.5, 5.5, 6.0, 6.5, 8.0mm		
Phillips: #0, 1, 2, 3 Square: #1, 2	Slt/Ph Terminal: #1, 2	
TORX: T8, T9, T10, T15, T20, T25,	Т27, Т30	
Hex Inch: 5/32, 3/16, 7/32, 1/4, 5/16, 3/8"		
Nut Driver Inch: 7/32, 1/4, 5/16, 3/8, 7/16, 1/2"		
50mm Cable Stripping Knife & Insul	ated Inch/Metric Folding Ruler	



32879 25 Pc. Pliers & Screwdriver Set. Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA, eq up to 1000 volt. Individually Tested.

Pliers drop-forged from special tool steel, individually high frequency induction hardened, chrome/nickel plated, mirror-polished. In tool box.

Item# 32879	Set Includes:	↓ ↓ lbs. 11.92
8.0" Long Nose		6.3" Stripping Pliers
9.0" Combinatio	n Pliers	Insulated Inch & Metric Folding Ruler
8.0" BiCut Super	rCut	8.5" Insulated Knife
Slotted: 3.0, 4.5	5, 6.0mm	Phillips: #1, #2
Square: #1, #2		Terminal Block Driver: #1, #2
Inch Nut Driver	: 1/4, 5/16, 11/	/32, 3/8, 7/16, 1/2"
Metric Nut Driv	er: 7.0, 8.0, 10).0, 13.0mm



32896 31 Pc. Pliers & Screwdriver Set. Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA, A up to 1000 volt. Individually Tested. Pliers drop-forged from special tool steel, individually high frequency induction hardened, chrome/nickel plated, mirror-polished. Set includes Insulated Inch & Metric folding ruler.

Item# 32896 Set Includes	s: ↓ ↓ lbs. 12.85
6.3" Long Nose Pliers	6.3" Side Cutters
8.0" Long Nose Pliers	8.0" BiCut SuperCut
7.0" Linemans Pliers	6.3" Stripping Pliers
9.0" Combination Pliers	6.3" Round Nose Pliers
Slotted: 2.0, 2.5, 3.0, 3.5, 4.5	, 5.5, 6.5, 8.0, 10.0mm
Phillips: #0, #1, #2, #3	
Inch Nut Driver: 5/32, 3/16, 7	7/32, 1/4, 5/16, 3/8, 7/16, 1/2, 9/16"



32878 13 Piece Pliers & Screwdriver Set. In canvas tool bag Set Includes: ____ lbs 5 16 m#20070

	item#32070 Set inci	udes: 🖶	+ IDS. 5.16
	8.0" Long Nose		50mm Cable Stripping Knife
	8.0" BiCut SuperCut		Insulated Slotted: 3.0mm
	9.0" Combo Pliers/Crimpe	ers	Insulated Slotted: 4.5mm
	Insulated Phillips: #1		Insulated Slotted: 6.0mm
Insulated Phillips: #2			Insulated Square: #1
	Insulated Slt/Ph Termina	l: #1	Insulated Square: #2
	Insulated Slt/Ph Termina	l: #2	

31



Wiha Insulated Pliers with High Visibility Comfort Grip Handle

ightarrow 1000Volt



• Pliers drop-forged from special tool steel, individually high frequency induction hardened, chrome and nickel plated, mirror-polished. • In zipper carry case

32891	10 Piece Pliers & Screwdriver Set	
Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM		
F-1505, NFPA70E & CSA, $\stackrel{\frown}{ ext{ }}$ up to 1000 volt. Individually Tested.		
Item# 328	91 Set Includes:	↓ ↓ lbs. 5.54
8.0" Comb	ination Pliers	8.0" Long Nose
8.0" BiCut	SuperCut	6.3" Cable Cutters

6.3" Universal Wire Stripper Insulated Phillips #1 Insulated Slotted 4.5mm Insulated Phillips #2 Insulated Slotted 6.5mm Insulated Phillips #3



 Pliers drop-forged from special tool steel, individually high frequency induction hardened, chrome and nickel plated, mirror-polished. • In zipper carry case

ightarrow 1000Volt

32895 14 Piece Pliers & Screwdriver Set Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA, 🛆 up to 1000 volt. Individually Tested. Item# 32895 Set Includes: + bs. 6.60

8.0" Long Nose	6.3" Side Cutters
9.0" Combination Pliers	8.0" BiCut SuperCut
6.3" Stripping Pliers	Insulated Slotted 2.5mm
Insulated Phillips #1	Insulated Slotted 3.0mm
Insulated Phillips #2	Insulated Slotted 3.5mm
Insulated Phillips #3	Insulated Slotted 4.5mm
Insulated Slotted 2.0mm	Insulated Slotted 6.5mm





32888	11 Piece Pliers & Scre	ewdriver Set In Canvas Pouch
Item# 3288	8 Set Includes: 🕁	▶ lbs. 3.58
6.3" Long N	lose	6.3" Side Cutters
8.0" Combir	nation Pliers	6.3" Stripping Pliers
Insulated SI	lotted 2.5mm	Insulated Phillips #0
Insulated SI	lotted 3.5mm	Insulated Phillips #1
Insulated SI	lotted 4.5mm	Insulated Phillips #2
Insulated SI	lotted 6.0mm	



32892 10 Piece Pliers & Screwdriver Set. Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA, \bigwedge up to 1000 volt. Individually Tested. Pliers drop-forged from special tool steel, individually high frequency induction hardened, chrome and nickel plated, mirror-polished. In canvas tool bag

	concernent in cantac teer bag
Item#32892 Set Includes:	 Ibs. 6.64
8.0" Bent Nose	8.0" Combination Pliers
6.3" Long Nose	6.3" Side Cutters
Insulated Phillips #0	Insulated Slotted 3.0mm
Insulated Phillips #1	Insulated Slotted 4.5mm
Insulated Phillips #2	Insulated Slotted 6.5mm



32894	13 Piece Pliers & Scr	ewdriver Set In canvas tool bag
Item# 32894	Item# 32894 Set Includes: + + Ibs. 9.5	
8.0" Bent No	ose	8.0" Combination Pliers
6.3" Long No	ose	6.3" Side Cutters
10" Water P	ump Pliers	
Insulated Slo	otted: 4.5 & 6.5mm	Insulated Nut Driver:
Insulated Ph	illips: #1 & #2	1/4, 5/16, 3/8, 1/2"



Wiha Insulated Pliers with High Visibility Comfort Grip Handle

• Pliers drop-forged from special tool steel, individually high frequency induction hardened, chrome and nickel plated, mirror-polished.



ightarrow 1000Volt

32889 8 Piece Pliers & Cutters Set

Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA, earrow up to 1000 volt. Individually Tested.Item# 32889 Set Includes: ____lbs. 4.63

6.3" Long Nose Pliers	8.0" Long Nose Pliers
6.3" Lineman's Pliers	6.3" Diagonal Cutters
9.0" Lineman's Pliers	8.0" BiCut SuperCut
6.3" Wire Stripping Pliers	Electrician's Knife




ightarrow 1000Volt

32867	10 Piece Pliers & Scro	ewdriver Set In Canvas Pouch
Item# 3286	67 Set Includes: 🕁	▶ lbs. 4.06
6.3" Diago	nal Cutters	9.0" Combo Pliers
6.3" Long	Nose Pliers	6.3" Wire Strippers
7.0" Crimp	ing Pliers	
Insulated S	Slotted 4.5mm	Insulated Phillips #1
Insulated S	Slotted 6.0mm	Insulated Phillips #2
Insulated S	Square: #2	



\Rightarrow 1000Volt

32869 14 Piece Pliers/Cutters	s & Screwdrivers Set
Insulation According to VDE 0682	
F-1505, NFPA70E & CSA, $ ightarrow$ up to	o 1000 volt. Individually Tested.
Item# 32869 Set Includes:	↓ ↓ lbs. 6.52
9.0" Lineman's Pliers	8.0" BiCut SuperCut
8.0" Cable Cutters	8.0" Long Nose Pliers
6.0" Stripping Pliers 10-20 AWG	
SlimLine Slotted 3.0, 4.5, 6.5mm	SlimLine Phillips #1, 2
SlimLine Square #1, 2	SlimLine Terminal #2
Single Pole Tester	

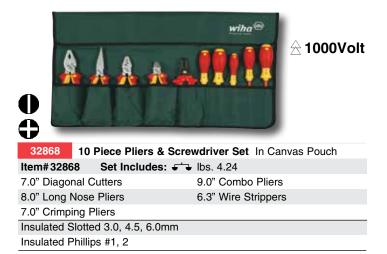



Insulated Tools are intended to provide protection against accidental contact with charged energized circuits. For maximum safety we recommend de-energizing all circuits whenever possible before starting work on electrical apparatus or conductors. Always visually inspect insulation on tools before use, do not use tools if insulation shows signs of wear or damage to the insulated areas of the tool. Wear appropriate eye protection when using hand tools. Use NFPA70E certified insulated protective outer wear when appropriate.

Use & Care Guide For Insulated Tools:

Store tools to minimize risk of damage to insulation, always wear approved eye protection, Inspect insulation prior to each use of any insulated tool. Use insulated tools where the ambient temperature is between -20 to +70° C. Have a qualified safety technician visually inspect insulation on tools annually for safe use.

1000Volt

0

7 Pc. Pliers & Driver Set. Insulation According to VDE 32899 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA, \therefore up to 1000 volt. Individually Tested. In molded tool box Item# 32899 • bs. 5.39 9.0" Linemans Pliers 6.3" Long Nose Pliers W/Cutter 6.3" Diagonal Cutter Insulated Phillips #1, 2 Insulated Slotted 3.0, 4.5mm



() Toll Free: (800) 494-6104

Insulated Pliers/Cutters & Screwdrivers Sets



 32856
 5 Pc. Insualted Pliers/Cutters & Screwdriver Set

 Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM

 F-1505, NFPA70E & CSA,
 up to 1000 volt. Individually Tested.

 Pliers drop forged of high C70 steel. Durable cutting is achieved through additional inductive hardening to approx. 64HRC. Screwdriver blade

 high alloy CVM steel, hardened, black finish. Insulation molded directly onto blade. Wiha-SoftFinish® handle, multi-component, cushion grip.

Item No.	Insulated Pliers/Cutters
32856	8.0" Long Nose Pliers
<u>ب ب</u>	6.3" Diagonal Cutters
lbs.	Insulated Slotted & Phillips Drivers
1.81	Slotted: 4.5, 5.5mm
	Phillips: #2



$m m \simeq$ 1000Volt

Item No.	Insulated Pliers/Cutters
32857	8.0" BiCut SuperCut Pliers
.	Insulated Slotted & Phillips Drivers
lbs.	Slotted: 3.5, 4.5, 5.5mm
1.85	Phillips: #0, #1, #2



1000Volt

 32865
 8 Pc. Insualted Pliers/Cutters & SlimLine Blade Set

 Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM

 F-1505, NFPA70E & CSA, ☆ up to 1000 volt. Individually Tested.

 Pliers drop forged of high C70 steel. Durable cutting is achieved through additional inductive hardening to approx. 64HRC. SlimLine blades high alloy CV steel, through hardened. Blades have up to 33% narrower insulation diameter then standard insulated tools.

Item No.	Insulated Pliers/Cutters
32865	8.0" Long Nose Pliers
• ` •	Insulated Slotted & Phillips SlimLine Blades
lbs.	Slotted: 3.0, 4.0, 5.5, 6.5mm
.98	Phillips: #1, #2



$m m \simeq$ 1000Volt

 32858
 7 Pc. Insualted Pliers/Cutters & Screwdriver Set

 Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM

 F-1505, NFPA70E & CSA,
 up to 1000 volt. Individually Tested.

 Pliers drop forged of high C70 steel. Durable cutting is achieved through additional inductive hardening to approx. 64HRC. Screwdriver blade

 high alloy CVM steel, hardened, black finish. Insulation molded directly onto blade. Wiha-SoftFinish® handle, multi-component, cushion grip.

Item No.	Insulated Pliers/Cutters
32858	8.0" Combination Lineman's Pliers
₅⁺₽	Insulated Slotted & Phillips Drivers
lbs.	Slotted: 3.5, 4.5, 5.5mm
1.81	Phillips: #0, #1, #2





32863 3 Pc. Insualted Pliers/Cutters & Stripping Pliers Set Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA, earrow up to 1000 volt. Individually Tested. Pliers drop forged of high C70 steel. Durable cutting is achieved through additional inductive hardening to approx. 64HRC.

Item No.	Insulated Pliers/Cutters & Stripping Pliers
32863	8.0" High Leverage Diagonal Cutters
lbs.	9.0" Lineman's Pliers W/Crimpers
2.21	6.3" Stripping Pliers Strips 0.81-2.59 / AWG #20-#10



32864 3 Pc. Insualted Pliers & Cutters Set Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA, 🖄 up to 1000 volt. Individually Tested. Pliers drop forged of high C70 steel. Durable cutting is achieved through additional inductive hardening to approx. 64HRC.

Item No.	Insulated Pliers & Cutters
32864	6.3" Diagonal Cutters
lbs.	8.0" Long Nose Pliers
1.94	8.0" Combination Lineman's Pliers

	NE Style Lineman's Pliers Set						
Insulated meets AST EN, NI & CSA sta	TM, IEC, FPA						
Individually	y Tested						
zone on	Knurled striking zone on vinyl grip pliers						
☆ 1000\	A 1000Volt						
32833							
Item No.	NE Style Lineman's Pliers						
32833	9.5" Insulated & 9.5" Vinyl Soft Grip - Lineman's Pliers						
	, lbs. 2.22						

Insulated BiCut SuperCut Cutting capacity up to 3mm hardened piano wire

分1000volt



Double the power at the press of a button BiCut does the job of two pairs of pliers Up to 50% less hand strength required for cutting

- Cutting force doubled for extremely hard materials
- Easily switch between two strengths in one-handed operation

32837 Insulated BiCut SuperCut. Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA, lpha up to 1000 Volt. Individually Tested. Durable cutting is achieved through additional inductive hardening to approx. 64HRC. Drop forged of high C70 steel. For cutting various materials from soft to extremely hard, such as nails, screws, bolts, wire cables, spring wires, chains, etc.

Item	\leftrightarrow	\leftrightarrow		÷-•
No.	mm	Inch	Pkg.	lbs.
32837	200	8.0	1	.78



36 Tools that work for you



64HRC

cutting edges

32821 Insulated Lineman's Pliers "5-In-1" Professional Design Insulation According to EN/IEC, ASTM, NFPA70E & CSA, \leftrightarrow up to 1000 volt. Individually Tested.

Deep cut radius conduit jaws for non-slip handling. Sure grip knurled & cross hatched flat jaw for non-slip griping. Extra long induction hardened precision matched cutting edges. Lower crimping jaw accepts most standard non-insulated electrical connectors. Large head with square anvil surface on each side. Made from premium CV tool steel forgings. Two component cushion grips for best user comfort.

Item	\leftrightarrow	\leftrightarrow	Cutting Capacity		• • •
No.	mm	Inch	Copper AWG	Pkg.	wt.
32821	225	9.0	#4	1	.98

Insulated High Leverage Combination Pliers





1000volt

32820 High Leverage Combination Pliers. Insulation According to EN/IEC 60900, ASTM F-1505, NFPA70E & CSA, A up to 1000 volt. Individually Tested. DIN ISO 5746

Extra long cutting edge for flat and round cables. Serrated jaws. Cutting edges additionally induction hardened to approx. 64HRC. C70 Special tool steel. Use for gripping, pulling & holding as well as cutting wires and cables ranging in hardness from soft to extremely hard. Two component soft grip ergonomic handles.

Item	\leftrightarrow	\leftrightarrow	Cutting Capacity		•••
No.	mm	Inch	Copper AWG	Pkg.	wt.
32820	225	9.0	#4	1	.86

Insulated NE Style Lineman's Pliers

New dynamic joint provides 40% easier cuts & significantly longer tool life

$rac{1}{1000}$ volt

32831

Insulated NE Style Lineman's Pliers. Insulation According to EN/IEC 60900, ASTM F-1505, NFPA70E and CSA, \Leftrightarrow up to 1000 Volt. Individually Tested. Long life edge is achieved through additional induction hardening to approx. 64HRC. Special C70 tool steel hardened & tempered. Extra long cutting edge for flat and round cables. Two component soft grip ergonomic handles.

Item		\leftrightarrow		• •	
No.	mm	Inch	Pkg.	wt.	
32831	245	9.5	1	1.18	

Insulated Combination Lineman's Pliers



328 Combination Pliers. Insulation According to VDE 0682/ part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA, A up to 1000 volt. Individually Tested. DIN ISO 5746 Extra long cutting edge for flat & round cables. Serrated jaws. Cutting edges additionally induction hardened to approx. 64HRC. C70 Special tool steel, Chrome finish. Use for gripping and holding as well as cutting soft and hard wires and cables. Two component soft grip ergonomic handles.

			-		
Item	\leftrightarrow	\rightarrow	Cutting Capacity		↓ • •
No.	mm	Inch	Copper AWG	Pkg.	wt.
32814	160	6.3	#10	1	.53
32816	180	7.0	#9	1	.58
32818	200	8.0	#8	1	.72
52010	200	0.0	#0		.12



32841 Insulated Crimping Pliers. Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E and CSA, lpha up to 1000 Volt. Individually Tested.

Semi-circular profiles for secure connection between end sleeve and conductor. Long life is achieved through additional induction hardening to 64HRC. C70 special tool steel hardened & tempered.

Item	\leftrightarrow	\leftrightarrow				+ +
No.	mm	Inch	mm2	AWG	Pkg.	wt.
32841	180	7.0	0.25-2.5	6-30	1	.57



37



328 Diagonal Cutters. Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA, A up to 1000 volt. Individually Tested. DIN ISO 5749 Low wear lap joint, riveted and able to withstand high levels of load. Lightweight action, clean cutting. Long term cutting is achieved through additional inductive hardening to approx. 60 HRC. Special tool steel hardened and tempered. For soft & medium hard wire. 32832 & 32834 for soft, hard & piano wire.

Item	** *	 Cutting Capacity 		••	
No.	mm Inch	Copper AWG	Pkg.	wt.	
32830	140 5.5	#6	1	.47	
32832	160 6.3	#6	1	.49	
32834	180 7.0	#6	1	.62	

Insulated High Leverage Diagonal Cutters



High Leverage Diagonal Cutters. Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA, $m \leftrightarrow$ up to 1000 volt. Individually Tested. DIN ISO 5749

Semi-circular. Low wear lap joint, riveted and able to withstand high levels of load. Lightweight action, clean cutting. Long term cutting is achieved through additional inductive hardening to approx. 64HRC. C70 special tool steel hardened and tempered to high quality. For soft, hard and piano wire, lay-on joint, optimized power transmission.

Item	\leftrightarrow	\leftrightarrow	Cutting Capacity		€ **
No.	mm	Inch	Copper AWG	Pkg.	wt.
32835	160	6.3	#6	1	.64
32836	180	7.0	#5	1	.67
32838	200	8.0	#4	1	.80

Insulated Electrician's Diagonal Cutters



1000volt

32861 **Diagonal Cutters W/Stripping Holes. Insulation According** to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA, \uparrow up to 1000 volt. Individually Tested. Drop-forged from special tool steel, cutters additionally induction hardened to approx. 64HRC, chrome-nickel plated, mirror-polished. Ergo comfort grip with slip guard. Holes in the cutting edge for stripping copper wire of Ø 1.5 and 2.5.

Item	\leftrightarrow	\leftrightarrow	Cutting Capacity		
No.	mm	Inch	Copper AWG	Pkg.	wt.
32861	160	6.3	#6	1	.55

Insulated Serrated Edge Cable Cutters



Serrated Edge Cable Cutters. Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E and CSA, lpha up to 1000 Volt. Individually Tested. Light, clean cutting ground precision cutting edges. Durable cutting is achieved through additional inductive hardening to approx. 64HRC. Special tool steel, hardened &

tempered. For cutting of copper & aluminum cables without crushing.						
Item		\leftrightarrow				+ +
No.	mm	Inch	Ø	mm2	Pkg.	lbs.
32826	160	6.3	16	50	1	.42
32828	200	8.0	20	60	1	.67

Insulated Stripping Pliers

64HRC cutting edges

1000volt

Stripping Pliers. Insulation According to VDE 0682/part 32860 201, EN/IEC 60900, ASTM F-1505, NFPA70E and CSA,

A up to 1000 volt. Individually Tested. Heavy duty forged, induction hardened cutting edges for even stripping of insulation. Drop-forged from special tool steel, chrome and nickel plated, mirror-polished. Spring and adjusting screw, for stripping up to Ø 5mm/#8 Awg.

Item	\leftrightarrow	\leftrightarrow	Stripping Capacity		+ +
No.	mm	Inch	Copper AWG	Pkg.	wt.
32860	160	6.3	#8 - #28	1	.50



10250 Insulated Stripping Pliers. Insulation According to EN/IEC 60900, DIN ISO 8976, ASTM F-1505 & CSA Specification. Individually Tested. Wide long head with ridged gripping surface, shears blade and firm wire stripping stations. Wire stripping stations 0.81 / 1.0 /

1.3/1.6/2	.0/2.58	emm, A	WG 20 / 18	/ 16 / 14 /	12/10		
Item No.	mm	Inch	Ø	AWG	Pkg.	lbs.	
10250	160	6.3"	0.81-2.59	20-10	1	.26	



.32

.42

Pkg. wt.

1

38 Tools that work for you

∑1000volt

Item

No.

32806

32808

Insulated Round Nose Pliers



Ξ 1000volt

Item	\leftrightarrow	↔		•••
No.	mm	Inch	Pkg.	wt.
32870	160	6.3	1	.34

Insulated Long Flat Nose Pliers

Use for Gripping and fig	m-angle	e benuing of wres	s anu sn	eet metal parts.
Item	\leftrightarrow	\leftrightarrow	_	• • •
No.	mm	Inch	Pkg.	wt.
32810	160	6.3	1	.39

Wiha Canvas Pliers Holster

- · Canvas holster with belt clip and belt loop
- · Security pliers strap

91256Pliers Canvas HolItemWidthHeightNo.SizeSize	
-	
No. Size Size Ib	
	s. pkg.
91256 3.5 x 6.75 .1	5 1



Pen Style Control Cabinet Key



For applications with all common switch cabinets and locking systems

21105Pen Style Control Cabinet KeyDiecast Zinc, polishedfinish. Includes: Square 5, 6, 7, 8mm, Triangular 9mm, Double Bit Key5mm/Internal & 9mm/External, Universal 1/4" Bit Adapter, Magnetic BitHolder & 2 Double Insert Bits: Slotted 7mm / Phillips #2, TORX T20/T25Item No.1405.5"1.30

Switch Cabinet Key



21103	Switch C	abinet	Keys For applicati	ons with	all common
switch cabi	nets and lo	ocking s	systems. Diecast Zir	าต	
Item No.	mm	Inch	Pkg.	lbs.	
21103	76	3.0"	1	.22	

Angled 40°

chrome-nickel plated, mirror-polished.

1000volt

328 Bent Nose Pliers With Cutters. Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA, \bigwedge up to 1000 volt. Drop-forged from special tool steel, cutters

Insulated Long Nose Pliers

328 Long Nose Pliers With Cutters. Insulation According to

Cutting Capacity

Copper AWG

#10

#8

VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA, \bigwedge up to 1000 volt. Individually Tested. Drop-forged from special

tool steel, cutters additionally induction hardened to approx. 64HRC,

Inch

6.3

8.0

Insulated Bent Nose Pliers

mm

160

200

additionally induction hardened to approx. 64HRC, chrome-nickel plated, mirror-polished. Serrated gripping surface, nose bent 40°.

Item	\checkmark	\checkmark	Cutting Capacity		• ` •
No.	mm	Inch	Copper AWG	Pkg.	wt.
32804	200	8.0	#8	1	.43
32807	160	6.3	#10	1	.32



Wiha Inomic 1000Volt Insulated Pliers

Award winning ergonomic design with head mounted at 23° angle to grip for reduced user fatigue
Each tool includes a convenient jaw lock & handle return spring
Heads drop forged CV premium tool steel



91230 Item

4.0

No.

91230

32850 Inomic Combo Pliers. Insulation According to EN/IEC 60900, ASTM F-1505, NFPA70E & CSA, Aup to 1000 volt. Individually Tested. DIN ISO 5749 Precision machined forged head. Induction hardened for longest tool life. Cross hatched flat jaw & deep cut radius jaws for secure gripping of the work piece. Cutting edges are matched for precise cutting action. Award winning ergonomic design with head mounted at 23° angle to grip for reduced user fatigue. Palm side of grip has molded soft panel for added comfort in prolonged use.

Item	\leftrightarrow	\leftrightarrow	Cutting Capacity		.
No.	mm	Inch	Copper AWG	Pkg.	lbs.
32850	180	7.0	#6	1	.46



32854	Inomic Diagonal	Cutter	S		
Item	↔	\checkmark	Cutting Capacity		.
No.	mm	Inch	Copper AWG	Pkg.	lbs.
32854	160	6.3	#6	1	.41



.05

1

4.5

Proturn Insulated Electrician's Shears



32951 Proturn Insulated Electrician's Shears Insulation meets VDE, ASTM F1505, EN/IEC 60900, CSA, NFPA 70E, OSHA Specifications. Made from stainless 420 grade steel

Item				÷÷
No.	mm	Inch	Pkg.	lbs.
32951	160	6.3	1	.22



Insulated Inch & Metric Folding Ruler 61630

10.000Volt Tested/1000Volt Rated. Inch & Metric deep embossed scales. 10 folding sections. 30% fiberglass reinforced polyimide. Itom

61630	2	78"	10	1/16 & 1mm	.31	1	
No.	Meter	Inch	Sections	Increments	lbs.	pkg.	
nem					•••	_	

Insulated Water Pump Pliers



32954 Insulated Industrial Water Pump Pliers. Insulation According to VDE, EN/IEC, ASTM, NFPA70E & CSA, 🖄 up to 1000 Volt. Individually Tested. 10 opening settings provides optimal adjustment to objects being gripped. Long life achieved through additional induction hardening of jaws to approx. 62HRC. Chromevanadium tool steel forgings, hardened and tempered. Black finish.

Item			Capac	ities		• ` •	
No.	mm	Inch	Round	Hex	Pkg.	wt.	
32954	250	10.0	1 3/4	2	1	.90	

Rapid & simple push button setting & locking



Insulated Industrial Push Button Water Pump Pliers. 32956 Insulation According to VDE, EN/IEC, ASTM, NFPA70E & CSA, Individually Tested. Extra narrow head for working in small spaces. Long life achieved through additional induction hardening of jaws to approx. 62HRC. Finger jam protection for safe operation at all settings. CVM tool steel forgings, hardened & tempered.

Item	↔	\leftrightarrow	Capaci	ties		÷.
No.	mm	Inch	Round	Hex	Pkg.	wt.
32956	250	10.0	1 3/4	2"	1	.90



Insulated Industrial Pliers & Cutters

Tools meet ASTM, IEC, VDE, EN, NFPA & CSA standards



Insulated Lineman's Pliers With Crimpers



32917 Insulated Industrial Lineman's Pliers "5-In-1" Professional Design. Insulation According to EN/IEC, ASTM, NFPA70E & CSA, \therefore up to 1000 volt. Individually Tested. Deep cut radius conduit jaws for non-slip handling. Sure grip knurled & cross hatched flat jaw for non-slip griping. Extra long induction hardened precision matched cutting edges. Lower crimping jaw accepts most standard non-insulated electrical connectors. Large head with square anvil surface on each side. Premium CV tool steel forgings.

Item	\leftrightarrow	\leftrightarrow	Cutting Capacity		÷ •
No.	mm	Inch	Copper AWG	Pkg.	wt.
32917	225	9.0	#4	1	.98

Insulated NE Style Lineman's Pliers NEV Knurled Striking Zone Long life high ☆1000volt performance dynamic 60/40 joint

32938 Insulated NE Style Lineman's Pliers. Insulation According to EN/IEC 60900, ASTM F-1505, NFPA70E and CSA, ightarrow up to 1000 Volt. Individually Tested. Long life edge is achieved through additional induction hardening to approx. 64HRC. Special C70 tool steel hardened & tempered. Extra long cutting edge for flat and round cables.

Item	\leftrightarrow	\leftrightarrow		•••	
No.	mm	Inch	Pkg.	wt.	
32938	245	9.5	1	1.18	

Insulated Long Nose Pliers With Cutters



1000volt

329 Insulated Industrial Long Nose Pliers With Cutters. Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA, Δ up to 1000 volt. Individually Tested. Drop-forged from special tool steel, cutters additionally induction hardened to approx. 64HRC, half-round jaws, serrated gripping surface.

Item			Cutting Capacity			
No.	mm	Inch	Copper AWG	Pkg.	wt.	
32926	160	6.3	#10	1	.36	
32923	200	8.0	#8	1	.46	

Insulated High Leverage Diagonal Cutters



ḋ1000volt

32939 Insulated Industrial High Leverage Diagonal Cutters. Insulation According to VDE, EN/IEC, ASTM, NFPA70E & CSA, 1000 volt rated. Individually Tested. DIN ISO 5749 Semi-circular. Low wear lap joint, riveted and able to withstand high levels of load. Lightweight action, clean cutting. Long term cutting is achieved through additional inductive hardening to approx. 64HRC. C70 special tool steel hardened and tempered to high quality. For soft, hard and piano wire, lay-on joint, optimized power transmission.

Item	\leftrightarrow	\checkmark	Cutting Capacity		+ ` +
No.	mm	Inch	Copper AWG	Pkg.	wt.
32939	200	8.0	#4	1	.66



329 Insulated Industrial Diagonal Cutters. Insulation According to VDE, EN/IEC, ASTM, NFPA70E & CSA, 1000Volt Rated. Individually Tested. DIN ISO 5749 Low wear lap joint, riveted and able to withstand high levels of load. Lightweight action, clean cutting. Long term cutting is achieved through additional inductive hardening to approx. 64HRC. Special tool steel hardened & tempered. For soft, medium hard wire & piano wire.

Item	\leftrightarrow	\checkmark	Cutting Capacity		↓ ↓	
No.	mm	Inch	Copper AWG	Pkg.	wt.	
32933	160	6.3	#6	1	.64	
32929	200	8.0	#6	1	.80	



41

Insulated Combo Pliers With Dynamic Joint

1000volt



32930 Insulated Industrial High Leverage Combination Pliers. Insulation According to EN/IEC 60900, ASTM F-1505, NFPA70E & CSA, \uparrow up to 1000 volt. Individually Tested. DIN ISO 5746 Extra long cutting edge for flat and round cables. Serrated jaws. Cutting edges additionally induction hardened to approx. 64HRC. Use for gripping, pulling & holding as well as cutting wires and cables ranging in hardness from soft to extremely hard.

			,		
Item		\Leftrightarrow	Cutting Capacity		.
No.	mm	Inch	Copper AWG	Pkg.	wt.
32930	200	8.0	#4	1	.92

Insulated TriCut Strippers & Cutters



32944 Insulated Industrial TriCut Strippers & Cutters. Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E and CSA, 4 up to 1000 Volt. Individually Tested. Induction hardened cutters & strippers. Cuts cable, strips cable, strips wire leads. Unique 3 in 1 design provides faster combined cutting and stripping. Strips AWG sizes #10 & #14.

Item	\leftrightarrow	\leftrightarrow			₅⁺₽	
No.	mm	Inch	AWG	Pkg.	wt.	
32944	170	6.7	#6	1	.58	

Insulated Heavy Duty Cable Cutters



ightarrow 1000volt

32927 Insulated Industrial Serrated Edge Cable Cutters. Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E and CSA, \triangle up to 1000 Volt. Individually Tested. Light, clean cutting ground precision cutting edges. Durable cutting is achieved through additional inductive hardening to approx. 64HRC. For cutting of copper & aluminum cables without crushing.

Item	\leftrightarrow					•••
No.	mm	Inch	Ø	mm2	Pkg.	lbs.
32927	200	8.0	20	60	1	.78

Insulated Crimpers



riangle 1000volt

32945 Insulated Industrial Crimping Pliers. Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E and CSA, ightarrow up to 1000 Volt. Individually Tested. Semi-circular profiles for secure connection between end sleeve and conductor. Long life is achieved through additional induction hardening to 64HRC. Crimps 6 - 30 AWG Connectors.

Item		↔				↓ ↓
No.	mm	Inch	mm2	AWG	Pkg.	wt.
32945	180	7.0	0.25-2.5	6-30	1	.64

NOTES:



Insulated Stripping Pliers




32947 Insulated Industrial Stripping Pliers. Insulation According to VDE, EN/IEC, ASTM, NFPA70E & CSA, 1000Volt Rated.

Individually Tested. DIN ISO 5745 Made from Premium CV tool steel forgings. Induction hardened jaws and cutters to 64HRC. Spring & adjusting screw, for stripping up to Ø 5mm/#8 Awg.

Item	\leftrightarrow	\leftrightarrow	Stripping Capacity	-	• • •
No.	mm	Inch	Copper AWG	Pkg.	wt.
32947	160	6.3	#8 - #28	1	.46



Insulated Industrial BiCut SuperCut

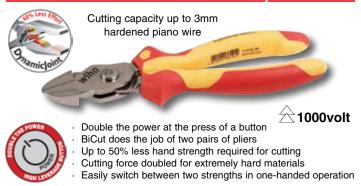

32936 Insulated Industrial BiCut SuperCut. Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA, A up to 1000 Volt. Individually Tested. Durable cutting is achieved through additional inductive hardening to approx. 64HRC. Drop forged of high C70 steel. For cutting various materials from soft to extremely hard, such as nails, screws, bolts, wire cables, spring wires, chains, etc.

Item	\leftrightarrow			€	
No.	mm	Inch	Pkg.	lbs.	
32936	200	8.0	1	.78	

Insulated BiCut SuperCut & Screwdriver Set

Tools meet ASTM, IEC, VDE, EN, NFPA & CSA standards




Phillips: #0, #1, #2

Slotted: 3.0, 4.5, 5.5mm

lbs.

1.86

Wiha Insulated Industrial Tool Sets

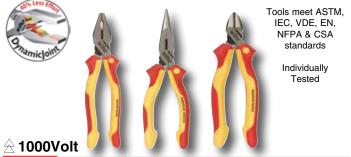

32981 3 Pc. Insulated Industrial Pliers & Cutters Item No. Insulated Pliers & Cutters 32981 8.0" Combo Pliers, 8.0" Long Pliers, 8.0" Diagonal Cutters 🖵 lbs. 2.18



ightarrow 1000Volt

5 Pc. Insulated Industrial Diagonal Cutters & Screwdrivers 32983 Item No. **Insulated Diagonal Cutters & Screwdrivers** 32983 6.3"/160mm Diagonal Cutter


Insulated Drivers: Slotted: 3.0, 4.5mm • Phillips: #1, #2 Ibs. 1.17





Wiha Insulated Industrial Tool Sets

32982	3 Pc. Insulated Industrial Pliers/Cutters & Voltage Detector
Item No.	Insulated Pliers/Cutters & Cat. III Voltage Detector
32982	6.3" Long Pliers, 6.3" Diagonal Cutters
	Voltage Detector with both light and sound alerts
ۍ نې	• lbs98



1000Volt

in blow molded tray

32999 9 Piece Insulated Industrial Pliers & Cutters Set

Insulated pliers & cutters set in a light weight tool box tray.						
Item No.	9.0" Lineman's Pliers	8.0" High Lev. Combo Pliers				
32999	6.3" Long Nose Pliers	8.0" Cable Cutters				
÷.	8.0" Long Nose Pliers	6.3" Stripping Pliers				
lbs.	6.3" Diagonal Cutters	7.0" Crimping Pliers				
6.34	8.0" Diagonal Cutters					



🕶 lbs. 2.30



32989	9.0" Lineman's Pliers	lbs.					
	8.0" High Leverage Combo Pliers	6.34					
	6.3" & 8.0" Long Nose Pliers						
	8.0" Cable Cutters						
	6.3" & 8.0" Diagonal Cutters						
	6.3" Stripping Pliers						
	7.0" Crimping Pliers						
	Slotted: 2.5, 3.0, 3.5, 4.0, 4.5, 5.5, 6.0,	6.5, 8.0, 10.0mm					
	Phillips: #0, #1, #2, #3						
	Xeno Slotted/Phillips: #1, #2 & Square: #1, #2						
	Cat. IV Voltage Detector - 50-1000 Volt	, Battery Operated					



32977 11 Pc. Pliers & Driver Set. Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA, riangleq up to 1000 volt. Individually Tested. In canvas tool bag Item# 32977 Set Includes: - Ubs. 6.30 8.0" Combination Pliers 6.3" Long Nose Pliers W/Cutter 8.0" Long Nose Pliers W/Cutter 6.3" Diagonal Cutter 8.0" High Leverage Cutter Insulated Phillips: #0, 1, 2 Insulated Slotted: 3.0, 4.0, 6.5mm



(uiha) Toll Free: (800) 494-6104

44 Tools that work for you

Wiha Insulated Industrial Tool Sets



 32986
 11 Pc. Pliers & Screwdriver Set. Insulation According

 to VDE 0682/part 201, DIN EN 60900, EN/IEC 60900, ASTM F-1505,

 NFPA70E, Aup to 1000 volt. Individually Tested. In Roll Out Pouch

 Item# 32986
 Set Includes:

 6.3" Long Nose Pliers
 6.3" Diagonal Cutters

 8.0" Combination Pliers
 6.3" Stripping Pliers

 Insulated Slotted: 3.0, 4.5, 5.5mm

Insulated Phillips: #1, #2 Insulated Square: #1, #2

In Roll Out Pouch



 32987
 8 Pc. Pliers & Cutters Set. Insulation According to

 VDE 0682/part 201, DIN EN 60900, EN/IEC 60900, ASTM F-1505,

 NFPA70E, A up to 1000 volt. Individually Tested. In Roll Out Pouch

 Item# 32987
 Set Includes:

 6.3" Long Nose Pliers
 6.3" Diagonal Cutters

8.0" Long Nose Pliers	8.0" H.D. Diagonal Cutters
9.0" Lineman's w/Cutters	6.3" Stripping Pliers
8.0" Cable Cutters	7.0" Crimpers



32988 22 Pc. Pliers & Cutters Set. Insulation According to VDE 0682/part 201, DIN EN 60900, EN/IEC 60900, ASTM F-1505, NFPA70E,

rested. In Roll Out Pouches						
ltem# 32988	Set Includes	s: Jbs. 5.74				
8.0" Long Nose	Pliers	6.3" Diagonal Cutters				
9.0" Lineman's	w/Cutters	8.0" H.D. Diagonal Cutters				
8.0" Cable Cutt	ers	6.3" Stripping Pliers				
7.0" Crimping F	liers					
15 Pc. SlimLine	15 Pc. SlimLine Blade Set includes: Insulated SlimLine Blade Holder					
Slotted: 3.0, 4.0), 5.5, 6.5	Phillips: #1, #2 Xeno: #1, #2				
TORX®: T8, T1	0, T15, T20	Square: #1, #2				



32973 22 Pc. Pliers & Driver Set. Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA, % up to 1000 volt. Individually Tested. In molded tool box Item# 32973 Set Includes: - Ubs. 8.70 9.0" Linemans Pliers W/Cutters 8.0" Long Nose Pliers W/Cutter 8.0" Diagonal Cutters 50mm Cable Stripping Knife Insulated Slim Phillips: #1, 2 Insulated Slim Slotted: 3.5, 4.5mm Insulated Slim Xeno: #1, 2 Insulated Slim Square: #1, 2 Insulated T-handle Hex Inch: 5/32, 3/16, 7/32, 1/4, 5/16, 3/8" Insulated Inch Nut Drivers: 3/8, 7/16, 1/4, 5/16"





igtriangleq1000Volt

0

32399 10 Pc. Pliers & Dr	iver Set. Insulation According to VDE						
0682/part 201, EN/IEC 60900,	0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA,						
ightarrow up to 1000 volt. Individually Tested. In canvas zipper pouch							
Item# 32399 Set Includes	s:						
8.0" Linemans Pliers	8.0" Long Nose Pliers W/Cutter						
8.0" Diagonal Cutter 6.3" Wire Stripper							
10.0" Adjustable Pliers							
Insulated Phillips: #1, 2	Insulated Slotted: 3.0, 4.5, 6.5mm						

www.wihatools.com





No Hassle Guarantee

Wiha branded tools are regarded as the most durable, best designed and highly innovative products around. Our tools are used by demanding professional tradespeople and tool aficionados alike. They are meant to be used and utilized often. However, if you are not happy for any reason return them within 12 months of purchase with proof of purchase and we will **Repair** or **Replace**.

Rest assured, if for some reason there is a defect in material or workmanship we will replace your tool free of charge for as long as you own the tool.

Failures due to misuse, abuse or normal wear and tear are not covered by this guarantee. We stand by our products with what we believe is the best **No Hassle Guarantee** in the industry.

Exclusions

Wiha Tools has the right to exclude Bits, Tweezers and Ceramic Screwdrivers. These products are either consumable or wear easily.

All torque tools are designed for 5,000 cycles or 1 year (whichever comes first). If a tool becomes out of specification within that period Wiha Tools will **Repair** or **Replace**. Visit <u>www.wihatools.com</u> to learn more about our Torque Control Service Program.

Legal

Some areas do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. This guarantee gives you specific rights, and you may also have other rights, which vary, from state to state, province to province, or country to country.

This **No Hassle Guarantee** is the sole and exclusive guarantee for the Willi Hahn Corporation dba Wiha Tools. No employee, agent, dealer, or other person is authorized to alter this guarantee or make any other guarantees on behalf of Wiha Tools.

Willi Hahn Corporation USA Attn: No Hassle Guarantee 1348 Dundas Circle Monticello, MN 55362 800-494-6104



Numerical Index by Item Number

Item No. Page	Item No. Page	Item No. Page	Item No. Page	Item No. Page
10250 37	20020 4	21093 6	28372 19	31345 9
11610 13	20022 4	21036 6	28373 19	31350 9
11950 13	20024 4	21095 6	28390 18	31390 9
11960 14	20027 4	21095 6		
				31391 9
11975 14	20030 4	21103 38		31394 10
11980 14	20032 4	21105 38	28393 17	31395 10
12326 13	20091 4	21208 5	28394 17	31425 10
12327 11	20093 4	21210 5	28395 17	31428 10
12851 10	20131 4	21212 5	28396 19	31429 10
12852 11	20133 4	21213 5	28398 18	31430 10
12853 13	20135 4	21214 5	28399 18	31431 10
12854 10	20136 4	21217 5	28724 17	31432 10
12855 10	20137 4	21219 5	28726 17	31433 10
12856 11	20138 4	21290 5	28727 17	31434 10
12857 11	20140 4	21325 5	28734 17	31435 10
12858 13	20141 4	21327 5	28736 17	31436 10
12859 13	20142 4	21329 5	28738 17	31437 10
13650 8	20144 4	21331 5	28740 17	31438 10
13651 8	20145 4	21333 5	28741 17	31439 10
13652 8	20146 4	21335 5	28742 17	31450 9
13653 8	20147 4	21391 5	28750 17	31460 9
13654 8	20148 4	25505 26	28751 17	31491 11
13655 8	20149 4	25511 26	28752 17	31493 11
13656 8	20151 4	28301 18	28791 16	31495 11
13657 8	20154 4	28302 18	28792 16	31496 11
13658 8	20190 4	28304 18	28795 16	31506 10
13659 8	20192 4	28307 19	29006 10	31507 10
13662 8	20194 5	28308 19	29009 11	31508 10
13663 8	20196 5	28309 19	29012 13	31509 10
13664 8	21008 6	28310 19	29250 13	31510 10
13665 8	21009 6	28312 19	30114 16	31511 10
13666 8	21010 6	28315 19	30138 16	31512 10
13667 8	21011 6	28317 19	30152 16	31513 10
13668 8	21012 6	28319 19	30190 16	31514 10
13669 8	21013 6	28320 19	30192 16	31515 10
13670 8	21014 6	28321 19	30700 26	31516 10
13671 8	21015 6	28327 19	30701 26	31517 10
13672 8	21017 6	28329 19	30711 26	31518 10
13673 8	21019 6	28330 19	30712 26	31519 10
13690 8	21020 6	28331 19	30746 21	31520 10
13691 8	21022 6	28332 19	30747 21	31521 10
13693 8	21024 6	28333 19	30770 22	31522 10
13694 8	21027 6	28334 19	31326 9	31524 10
15000 7	21030 6	28335 19	31327 9	31590 11
15003 7	21032 6	28336 19	31328 9	31592 11
15050 7	21040 6	28337 19	31329 9	31595 11
19767 13	21042 6	28338 19	31330 9	31608 12
20006 4	21044 6	28339 19	31331 9	31609 12
20007 4	21046 6	28340 19	31332 9	31610 12
20007 4 20008 4	21048 6	28341 19	31333 9	31611 12
20009 4	21048 0	28342 19	31334 9	31612 12
20009 4 20010 4	21050 6	28343 19		31613 12
20010 4	21052 6	28344 19		31614 12
20011 4	21054 6	28346 19		
		28347 19		
			31338 9	31616 12
20014 4		28350 17	31339 9	31617 12
20015 4	21060 6	28366 17,20	31340 9	31618 12
20016 4	21062 6	28367 17,20	31341 9	31619 12
20017 4	21064 6	28368 17,20	31342 9	31620 12
20018 4	21066 6	28369 17,20	31343 9	31621 12
20019 4	21068 6	28371 17,20	31344 9	31622 12



Item No.	Page	
31623	12	
31624	12	
31626	12	
31627 31628	12 12	
31628	12	
31632	12	
31650	9	
31691	12	
31694	12	
31703	12	
31704	12	
31705	12	
31707 31708	12 12	
31708	12	
31710	12	
31712	12	
31713	12	
31714	12	
31715	12	
31716	12	
31718	12	
31720 31722	12 12	
31722	12	
31792	12	
31805	9	
31807	9	
31809	9	
31811	9	
31813	9	
31815	9	
31817 31830	9 9	
31832	9	
31834	9	
31836	9	
31838	9	
31840	9	
31842	9	
31844	9	
31890 32000	9 22	
32000	22	
32001	22	
32003	22	
32004	22	
32005	23	
32010	23	
32012	23	
32015	23	
32017 32023	23 23	
32023	23	
32024	23	
32026	23	
32027	23	
32028	23	
32031	23	
32034	23	

Item No.	Page
32039	23
32039	23
32045	23
32046	21
32049	21
32052	21
32055	21
32058	21
32079	22
32085	22
32087	26
	-
32088	22
32089	26
32090	23
32091	24
32092	24
32093	24
32094	24
32095	24
32100	23
32100	23
	-
32102	23
32103	23
32104	23
32105	23
32106	22
32107	22
32108	22
32145	21
32145	21
32188	24
32189	22
32190	24
32192	24
32196	22
32197	21
32198	21
32199	26
32206	27
32200	27
OLLOO	
32212	27
32215	27
32218	27
32221	27
32224	27
32227	27
32230	27
32233	27
32236	27
32230	27
32238	
	27
32240	27
32241	27
32255	27
32258	27
32261	27
32264	27
32267	27
32268	27
32200	27
32270	
32213	27

Item No.	Page
32276	27
32278	27
32280	27
32288	27
32291	27
32292	27
32293	27
32294	27
32296	27
32302	25
32303	25
32304	25
32305	25
32306	25
32308	25
32366	25
32390	44
32399	44
32400	26
32401	26
32402	26
32403	26
32480	20
32505	25
32511	25
32512	21
32513	21
32514	21
32515	21
32516	25
32517	21
32518	21
32519	21
32521	25
32526	25
32531	25
32536	25
32541	25
32546	25
32551	25
32556	25
32561	25
32566	25
32590	25
32592	25
32596	22
32800	29
32804	38
32806	38
32807	38
32808	38
32810	38
32814	36
32816	36
32818	36
32820	36
32821	36
32826	37
32828	37
32830	37
32831	36
	-

Item No.	Page	Item No. Page
32832	37	32982 43
32833	35	32983 42
32834	37	32984 42
32835	37	32985 43
32836	37	32986 44
32837	35	32987 44
32838	37	32988 44
32841	36	32989 43
32850	39	32990 28
32854	39	32999 43
32856	34	33441 15
32857	34	33443 15
32858	34	33445 15
32860	37	33447 15
32861	37	33449 15
32862	35	33478 15
32863	35	33481 15
32864	35	33482 15
32865	34	33483 15
32867	33	33485 15
32868	33	33486 15
32869	33	33487 15
32870	38	33490 15
32871	29	33532 23
32872	29	33632 15
32873	28	33634 15
32874	31	33637 15
32875	29	33641 15
32876	30	35811 25
32877	30	35812 25
32878	31	35844 21
32879	31	35845 21
32886	28	35890 25
32888 32889	32 33	35891 25 38050 28
32891	32	38050 28
32892	32	40800 13
32894	32	61630 39
32895	32	75205 14
32896	31	75210 14
32899	33	75215 14
32917	40	75220 14
32923	40	75302 14
32926	40	75304 14
32927	41	76208 7
32929	40	76210 7
32930	41	76212 7
32933	40	76215 7
32936	42	76290 7
32938	40	91230 39
32939	40	91256 38
32942	42	
32944	41	
32945	41	
32947	41	
32951	39	
32954	39	A
32956	39	A Prop65 WARNING: This product
32973	44	can expose you to chemicals including
32977	43	Diisononyl Phthalate, Vinyl Chloride, Ethylene Glycol, Ni or CrVI, which is known
32981	42	to the State of California to cause cancer or
		reproductive harm. For more information, go to www.P65Warnings.ca.gov.

to www.P65Warnings.ca.gov.

MANUFACTURING AWARD BESTES KMU 2014

WIHA – WINNER OF THE MX AWARD 2014. GERMANYS BEST SME.






Insulation Test



Puncture Test




Cold Impact Test



Flame Resistance Test



Material Integrity Test



(800) 494-6104 fax: (800) 494-7456 cservice@wihatools.com www.wihatools.com

Subject to change without notice

©2019 Willi Hahn Corporation

®Torx is a registered trademark of Acument Intellectual Properties LLC.

Catalog Item No. 99919 .wo version - 3/1/19



Wiha Quality Tools

To:





Like Us On





99002.wo - Screwdrivers Catalog











99007.wo - Merchandise Catalog

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Wiha:

32800 31395 31496 19767 31595 28391 28791 21391 32877 28390 28792 32876 32188