


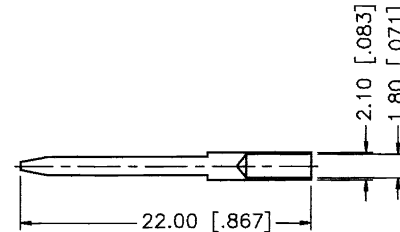
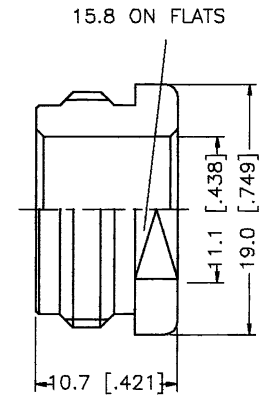




4.50 [.177] 3.50 [.138]

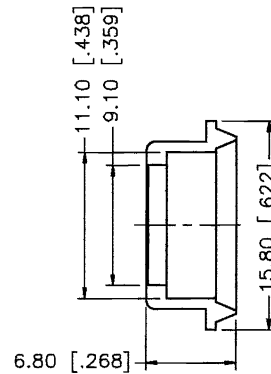

RECOMMENDED
CABLE STRIPPING DIM'S

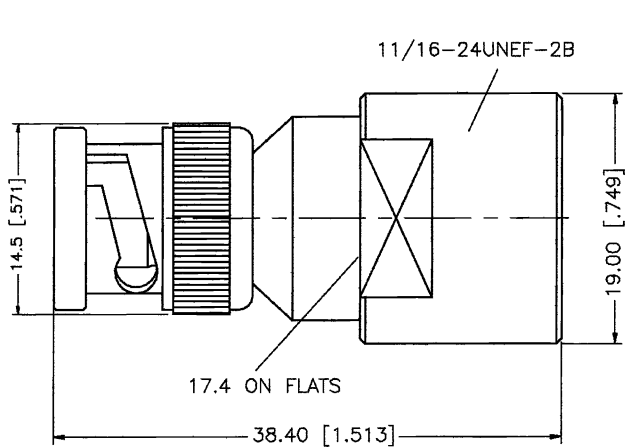

	DESCRIPTION	MATERIAL	FINISH	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS	APPROVALS	DATE						
1	BODY	BRASS	NICKEL	DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5-6 = ± 0.2 6-30 = ± 0.4 30-120 = ± 0.6 120-315 = ± 1 315-1000 = ± 1.6 1000-2000 = ± 2.4	DRAWN	G.R.S.					07/30/00	
2	INSULATOR	TEFLON	NATURAL		CHECKED							
3	BRAID CLAMP	BRASS	NICKEL		ISSUED							
4	GASKET	SILICONE	RED				TITLE BNC CLAMP JACK (FOR RG11/U, 14 AWG B 8213, B929L CABLE)					
5	WASHER	BRASS	NICKEL				SIZE	FSCM NO.	DWG. NO.	REV.		
6	NUT	BRASS	NICKEL				A	99001	112657.DWG	NC		
7												
8				DO NOT SCALE DRAWING			SCALE	NA	PART NO.	112657	SHEET	1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[112657](#)