

Specifications:

Current Rating:1.5A AC/DC(VBS&GND)  
0.25A AC/DC(Others)

Voltage Rating: 30V AC/DC

Contact Resistance:30m ohm. Max.(VBS&GND)  
50m ohm. Max.(Others)

Insulation Resistance:100M ohm. Min.

Withstanding Voltage:100V AC For One Minute  
Operating Temperature Range:-40°C to +105°C

Material and Finish


Insulator:PBT (UL94V-0)

Insulator Colour:Blue

Contact:Phosphor Bronze

Plating:15u" Gold Plated on Contact Area,  
Tin Plated on Solder Tail.

Shell:Brass,Nickel Plated

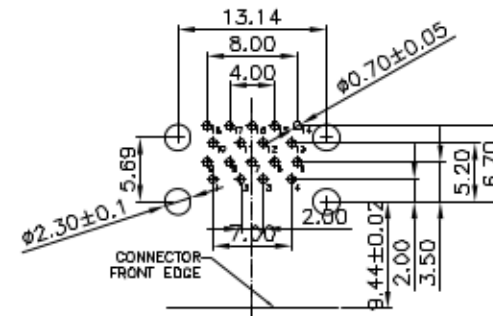

PCB layout(TOP VIEW)

RoHS Compliant

				DRAWN:	GENERAL TOLERANCE: .X=±0.20 .XX=±0.10	<b>CnC Tech</b> Industrial Cable and Connector Technology	
				CHECKED:	UNIT: MM		DESCRIPTION:
B					SCALE:1:1	USB 3.0 AF Double Rows Right Angle Dip Type,15u"	A4
A	04-Apr-2018			APPROVAL:	SHEET: 1 / 2	PART NO:	
REV	DATE	FILE	BY		PROJECTION:	1003-004-01010	