

ALUMINUM ELECTROLYTIC CAPACITORS

nichicon

UCD

Chip Type, Low Impedance



- Chip type, low impedance temperature range up to +105°C.
- Designed for surface mounting on high density PC board.
- Applicable to automatic mounting machine fed with carrier tape.
- Compliant to the RoHS directive (2011/65/EU).
- AEC-Q200 compliant. Please contact us for details.

UCL Low Impedance UCD Low Impedance UUD




■ Specifications

Item	Performance Characteristics																																																
Category Temperature Range	-55 to +105°C																																																
Rated Voltage Range	6.3 to 100V																																																
Rated Capacitance Range	1 to 3300μF																																																
Capacitance Tolerance	±20% at 120Hz, 20°C																																																
Leakage Current	After 2 minutes' application of rated voltage at 20°C, leakage current is not more than 0.01 CV or 3 (μA), whichever is greater.																																																
Tangent of loss angle (tan δ)	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>80</th> <th>100</th> </tr> </thead> <tbody> <tr> <td>tan δ (MAX.)</td> <td>0.26</td> <td>0.19</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.08</td> <td>0.08</td> <td>0.07</td> </tr> </tbody> </table>									Rated voltage (V)	6.3	10	16	25	35	50	63	80	100	tan δ (MAX.)	0.26	0.19	0.16	0.14	0.12	0.10	0.08	0.08	0.07																				
Rated voltage (V)	6.3	10	16	25	35	50	63	80	100																																								
tan δ (MAX.)	0.26	0.19	0.16	0.14	0.12	0.10	0.08	0.08	0.07																																								
	For capacitance of more than 1000μF, add 0.02 for every increase of 1000μF.																																																
Stability at Low Temperature	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>80</th> <th>100</th> </tr> </thead> <tbody> <tr> <td>Z-25°C / Z+20°C</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z-40°C / Z+20°C</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> </tr> <tr> <td>Z-55°C / Z+20°C</td> <td>4</td> <td>4</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> </tr> </tbody> </table>									Rated voltage (V)	6.3	10	16	25	35	50	63	80	100	Z-25°C / Z+20°C	2	2	2	2	2	2	2	2	2	Z-40°C / Z+20°C	3	3	3	3	3	3	3	3	3	Z-55°C / Z+20°C	4	4	4	3	3	3	3	3	3
Rated voltage (V)	6.3	10	16	25	35	50	63	80	100																																								
Z-25°C / Z+20°C	2	2	2	2	2	2	2	2	2																																								
Z-40°C / Z+20°C	3	3	3	3	3	3	3	3	3																																								
Z-55°C / Z+20°C	4	4	4	3	3	3	3	3	3																																								
Endurance	<table border="1"> <thead> <tr> <th colspan="2">The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 5000 hours (2000 hours for L < 10 mm: 50V or less, and for L ≤ 10mm: 63V or more) at 105°C.</th> </tr> <tr> <th>Capacitance Change</th> <th>Within ± 30% of the initial capacitance value</th> </tr> </thead> <tbody> <tr> <td>tan δ</td> <td>200% or less than the initial specified value 300% or less than the initial specified value for 63V or more</td> </tr> <tr> <td>Leakage current</td> <td>Less than or equal to the initial specified value</td> </tr> </tbody> </table>									The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 5000 hours (2000 hours for L < 10 mm: 50V or less, and for L ≤ 10mm: 63V or more) at 105°C.		Capacitance Change	Within ± 30% of the initial capacitance value	tan δ	200% or less than the initial specified value 300% or less than the initial specified value for 63V or more	Leakage current	Less than or equal to the initial specified value																																
The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 5000 hours (2000 hours for L < 10 mm: 50V or less, and for L ≤ 10mm: 63V or more) at 105°C.																																																	
Capacitance Change	Within ± 30% of the initial capacitance value																																																
tan δ	200% or less than the initial specified value 300% or less than the initial specified value for 63V or more																																																
Leakage current	Less than or equal to the initial specified value																																																
Shelf Life	After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.																																																
Resistance to soldering heat	<table border="1"> <thead> <tr> <th>Capacitance Change</th> <th>Within ± 10% of the initial capacitance value</th> </tr> </thead> <tbody> <tr> <td>tan δ</td> <td>Less than or equal to the initial specified value</td> </tr> <tr> <td>Leakage current</td> <td>Less than or equal to the initial specified value</td> </tr> </tbody> </table>									Capacitance Change	Within ± 10% of the initial capacitance value	tan δ	Less than or equal to the initial specified value	Leakage current	Less than or equal to the initial specified value																																		
Capacitance Change	Within ± 10% of the initial capacitance value																																																
tan δ	Less than or equal to the initial specified value																																																
Leakage current	Less than or equal to the initial specified value																																																
Marking	Black print on the case top.																																																


■ Chip Type

(φ4 to φ8 × 6.2)

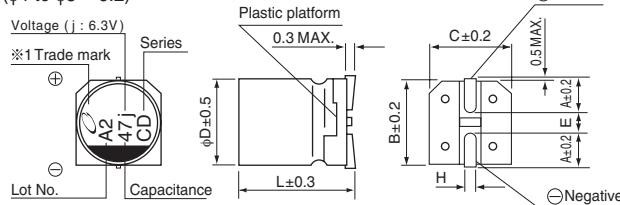


※1: Size φ8 × 6.2 only

(φ8 × 10, φ10)

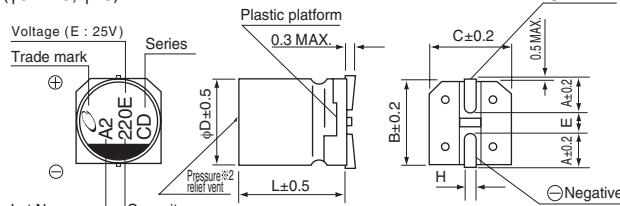

※2 : Except: φ10 × 7.7L

(φ12.5 to φ18)

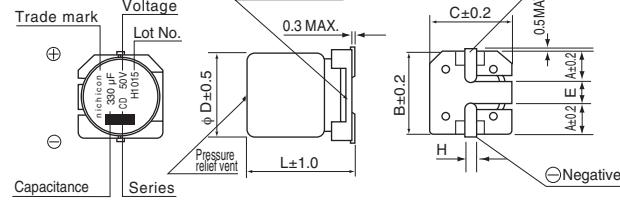


※φ8 × 10L, φ10 × 10L, φ12.5 × 13.5L, φ16 × 16.5L, φ18 × 16.5L :

The vibration structure-resistant product is also available upon request, please ask for details.

● Dimension table in next page.

Type numbering system (Example : 16V 100μF)

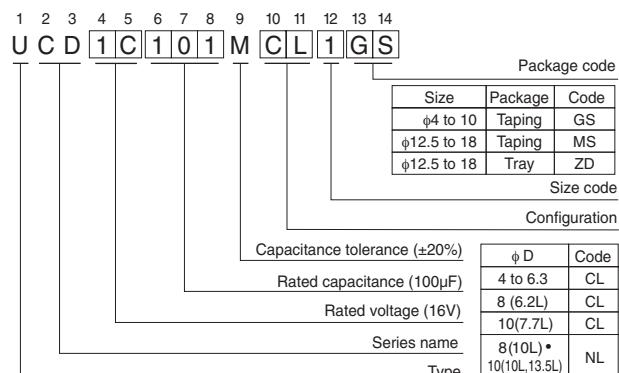

ϕ D × L	4 × 5.8	5 × 5.8	6.3 × 5.8	6.3 × 7.7	8 × 6.2	8 × 10	10 × 7.7	10 × 10
A	1.8	2.1	2.4	2.4	3.3	2.9	3.2	3.2
B	4.3	5.3	6.6	6.6	8.3	8.3	10.3	10.3
C	4.3	5.3	6.6	6.6	8.3	8.3	10.3	10.3
E	1.0	1.3	2.2	2.2	2.3	3.1	4.5	4.5
L	5.8	5.8	5.8	7.7	6.2	10	7.7	10
H	0.5 to 0.8	0.8 to 1.1	0.8 to 1.1	0.8 to 1.1				

ϕ D × L	10 × 13.5	12.5 × 13.5	16 × 16.5	18 × 16.5
A	3.2	4.8	5.4	6.4
B	10.3	13.6	17.1	19.1
C	10.3	13.6	17.1	19.1
E	4.5	4.0	6.3	6.3
L	13.5	13.5	16.5	16.5
H	0.8 to 1.1	1.0 to 1.4	1.0 to 1.4	1.0 to 1.4

Voltage	6.3	10	16	25	35	50	63	80	100
Code	j	A	C	E	V	H	J	K	2A

ALUMINUM ELECTROLYTIC CAPACITORS

nichicon

UCD

Dimensions

Cap. (μF)	V	6.3			10			16			25			35			50			
		Code	0J		1A		1C		4 × 5.8	1.35	90	4 × 5.8	1.35	90	4 × 5.8	1.35	90	4 × 5.8	1.35	90
1	010																	4 × 5.8	2.70	60
2.2	2R2																	4 × 5.8	2.70	60
3.3	3R3																	4 × 5.8	2.70	60
4.7	4R7																	4 × 5.8	2.70	60
10	100							4 × 5.8	1.35	90	4 × 5.8	1.35	90	●4 × 5.8	1.35	90	●5 × 5.8	1.50	90	
15	150							4 × 5.8	1.35	90	5 × 5.8	0.70	160	5 × 5.8	0.70	160	5 × 5.8	0.86	170	
22	220	4 × 5.8	1.35	90	4 × 5.8	1.35	90	●4 × 5.8	1.35	90	5 × 5.8	0.70	160	5 × 5.8	0.70	160	6.3 × 5.8	0.86	170	
27	270	4 × 5.8	1.35	90	5 × 5.8	0.70	160	5 × 5.8	0.70	160	6.3 × 5.8	0.36	240							
33	330	5 × 5.8	0.70	160	●4 × 5.8	1.35	90	6.3 × 5.8	0.36	240	●5 × 5.8	0.70	160	6.3 × 5.8	0.36	240	6.3 × 7.7	0.66	195	
47	470	●4 × 5.8	1.35	90	6.3 × 5.8	0.36	240	●5 × 5.8	0.70	160	6.3 × 5.8	0.36	240	6.3 × 5.8	0.36	240	6.3 × 7.7	0.66	195	
56	560	5 × 5.8	0.70	160	6.3 × 5.8	0.36	240	6.3 × 5.8	0.36	240	6.3 × 5.8	0.36	240							
68	680	6.3 × 5.8	0.36	240	6.3 × 5.8	0.36	240	6.3 × 5.8	0.36	240	6.3 × 5.8	0.36	240	6.3 × 7.7	0.32	290				
100	101	●5 × 5.8	0.70	160	6.3 × 5.8	0.36	240	6.3 × 5.8	0.36	240	6.3 × 7.7	0.32	290	●6.3 × 7.7	0.32	290	8 × 10	0.32	350	
		6.3 × 5.8	0.36	240							●8 × 6.2	0.26	300	8 × 10	0.16	600	●10 × 7.7	0.36	330	
150	151	6.3 × 5.8	0.36	240	6.3 × 5.8	0.36	240	6.3 × 7.7	0.32	290	8 × 10	0.16	600	8 × 10	0.16	600	10 × 10	0.16	700	
220	221	6.3 × 5.8	0.36	240	6.3 × 7.7	0.32	290	6.3 × 7.7	0.32	290	8 × 10	0.16	600	8 × 10	0.16	600	10 × 10	0.16	700	
330	331	6.3 × 7.7	0.32	290	8 × 10	0.16	600	8 × 10	0.16	600	8 × 10	0.16	600	10 × 10	0.08	850	●10 × 13.5	0.14	800	
		●8 × 6.2	0.26	300	●10 × 7.7	0.18	600	●10 × 7.7	0.18	600							12.5 × 13.5	0.12	900	
390	391																	12.5 × 13.5	0.12	900
470	471	8 × 10	0.16	600	8 × 10	0.16	600	8 × 10	0.16	600	10 × 10	0.08	850	●10 × 13.5	0.08	950	16 × 16.5	0.073	1610	
		●10 × 7.7	0.18	600	●10 × 7.7	0.18	600	●10 × 7.7	0.18	600							12.5 × 13.5	0.08	1100	
680	681	8 × 10	0.16	600	10 × 10	0.08	850	10 × 10	0.08	850	10 × 13.5	0.08	950	12.5 × 13.5	0.08	1100	16 × 16.5	0.073	1610	
1000	102	8 × 10	0.16	600	10 × 10	0.08	850	10 × 13.5	0.08	950	12.5 × 13.5	0.08	1100	16 × 16.5	0.035	1800				
1500	152	10 × 10	0.08	850	10 × 13.5	0.08	950	12.5 × 13.5	0.08	1100										
2200	222	10 × 13.5	0.08	950	12.5 × 13.5	0.08	1100				16 × 16.5	0.035	1800							
3300	332	12.5 × 13.5	0.08	1100													Case size ΦD × L (mm)	Impedance	Rated ripple	

Cap. (μF)	V	63			80			100			
		Code	1J		1K		2A				
3.3	3R3				5 × 5.8	5.00	25				
4.7	4R7	5 × 5.8	3.00	50	6.3 × 5.8	3.00	40				
10	100	6.3 × 5.8	1.50	80	6.3 × 7.7	2.40	60				
22	220	6.3 × 7.7	1.20	120	8 × 10	1.30	130	8 × 10	1.30	130	
33	330	8 × 10	0.65	250	8 × 10	1.30	130	10 × 10	0.70	200	
47	470	8 × 10	0.65	250	10 × 10	0.70	200	12.5 × 13.5	0.32	500	
68	680	10 × 10	0.35	400	12.5 × 13.5	0.32	500	12.5 × 13.5	0.32	500	
100	101	10 × 10	0.35	400	12.5 × 13.5	0.32	500	16 × 16.5	0.17	793	
150	151	12.5 × 13.5	0.16	800	12.5 × 13.5	0.32	500	16 × 16.5	0.17	793	
220	221	12.5 × 13.5	0.16	800				18 × 16.5	0.15	917	
330	331				16 × 16.5	0.17	793	18 × 16.5	0.15	917	
470	471	16 × 16.5	0.082	1410	18 × 16.5	0.15	917	Case size ΦD × L (mm)	Impedance	Rated ripple	
680	681	18 × 16.5	0.08	1690							

Max. Impedance (Ω) at 20°C 100kHz, Rated ripple current (mAmps) at 105°C 100kHz

● In this case, ⑥ will be put at 12th digit of type numbering system.

• Frequency coefficient of rated ripple current

Frequency	50Hz	120Hz	300Hz	1kHz	10kHz or more
Coefficient	0.35	0.50	0.64	0.83	1.00

• Taping specifications are given in page 23.

• Recommended land size, soldering by reflow are given in page 18, 19.

• Please refer to page 3 for the minimum order quantity.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Nichicon:

UCD0J101MCL6GS	UCD0J331MCL6GS	UCD0J470MCL6GS	UCD1A221MCL6GS	UCD1A330MCL6GS
UCD1C220MCL6GS	UCD1C221MCL6GS	UCD1C470MCL6GS	UCD1E101MCL6GS	UCD1E330MCL6GS
UCD1H100MCL6GS	UCD1H330MCL6GS	UCD1H470MCL6GS	UCD1J220MCL6GS	UCD1K100MCL6GS
UCD1V100MCL6GS	UCD1V101MCL6GS	UCD0J101MCL1GS	UCD0J102MNL1GS	UCD0J152MNL1GS
UCD0J220MCL1GS	UCD0J221MCL1GS	UCD0J331MCL1GS	UCD0J470MCL1GS	UCD0J471MNL1GS
UCD1A102MNL1GS	UCD1A151MCL1GS	UCD1A220MCL1GS	UCD1A221MCL1GS	UCD1A330MCL1GS
UCD1A331MNL1GS	UCD1A471MNL1GS	UCD1A681MNL1GS	UCD1C100MCL1GS	UCD1C101MCL1GS
UCD1C151MCL1GS	UCD1C220MCL1GS	UCD1C221MCL1GS	UCD1C331MNL1GS	UCD1C470MCL1GS
UCD1C471MNL1GS	UCD1C681MNL1GS	UCD1E100MCL1GS	UCD1E101MCL1GS	UCD1E151MNL1GS
UCD1E220MCL1GS	UCD1E221MNL1GS	UCD1E330MCL1GS	UCD1E331MNL1GS	UCD1E470MCL1GS
UCD1E471MNL1GS	UCD1E680MCL1GS	UCD1H100MCL1GS	UCD1H101MNL1GS	UCD1H151MNL1GS
UCD1H220MCL1GS	UCD1H221MNL1GS	UCD1H330MCL1GS	UCD1H4R7MCL1GS	UCD1H470MCL1GS
UCD1J100MCL1GS	UCD1J101MNL1GS	UCD1J220MCL1GS	UCD1J330MNL1GS	UCD1J4R7MCL1GS
UCD1J470MNL1GS	UCD1J680MNL1GS	UCD1K100MCL1GS	UCD1K220MNL1GS	UCD1K3R3MCL1GS
UCD1K330MNL1GS	UCD1K4R7MCL1GS	UCD1K470MNL1GS	UCD1V100MCL1GS	UCD1V101MNL1GS
UCD1V151MNL1GS	UCD1V220MCL1GS	UCD1V221MNL1GS	UCD1V330MCL1GS	UCD1V331MNL1GS
UCD1V4R7MCL1GS	UCD1V470MCL1GS	UCD1V471MNQ1MS	UCD1V680MCL1GS	UCD1V681MNQ1MS
UCD2A101MNQ1MS	UCD2A151MNQ1MS	UCD2A220MNL1GS	UCD2A221MNQ1MS	UCD2A330MNL1GS
UCD2A331MNQ1MS	UCD2A470MNQ1MS	UCD2A680MNQ1MS	UCD1H681MNQ1MS	UCD1E102MNQ1MS
UCD1E222MNQ1MS	UCD1H331MNQ1MS	UCD1H471MNQ1MS	UCD1J471MNQ1MS	UCD1J221MNQ1MS