



LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
ES	00		A4	REV PER ECR-15-005882	20APR2015	ML	SZ

D


C

B


A

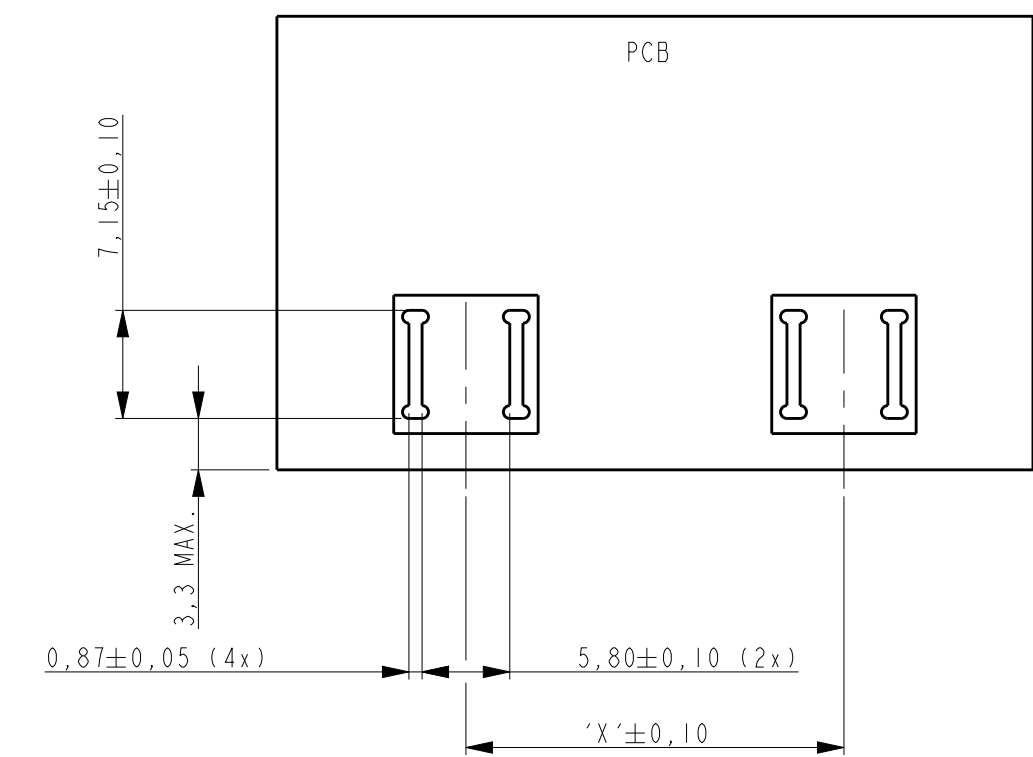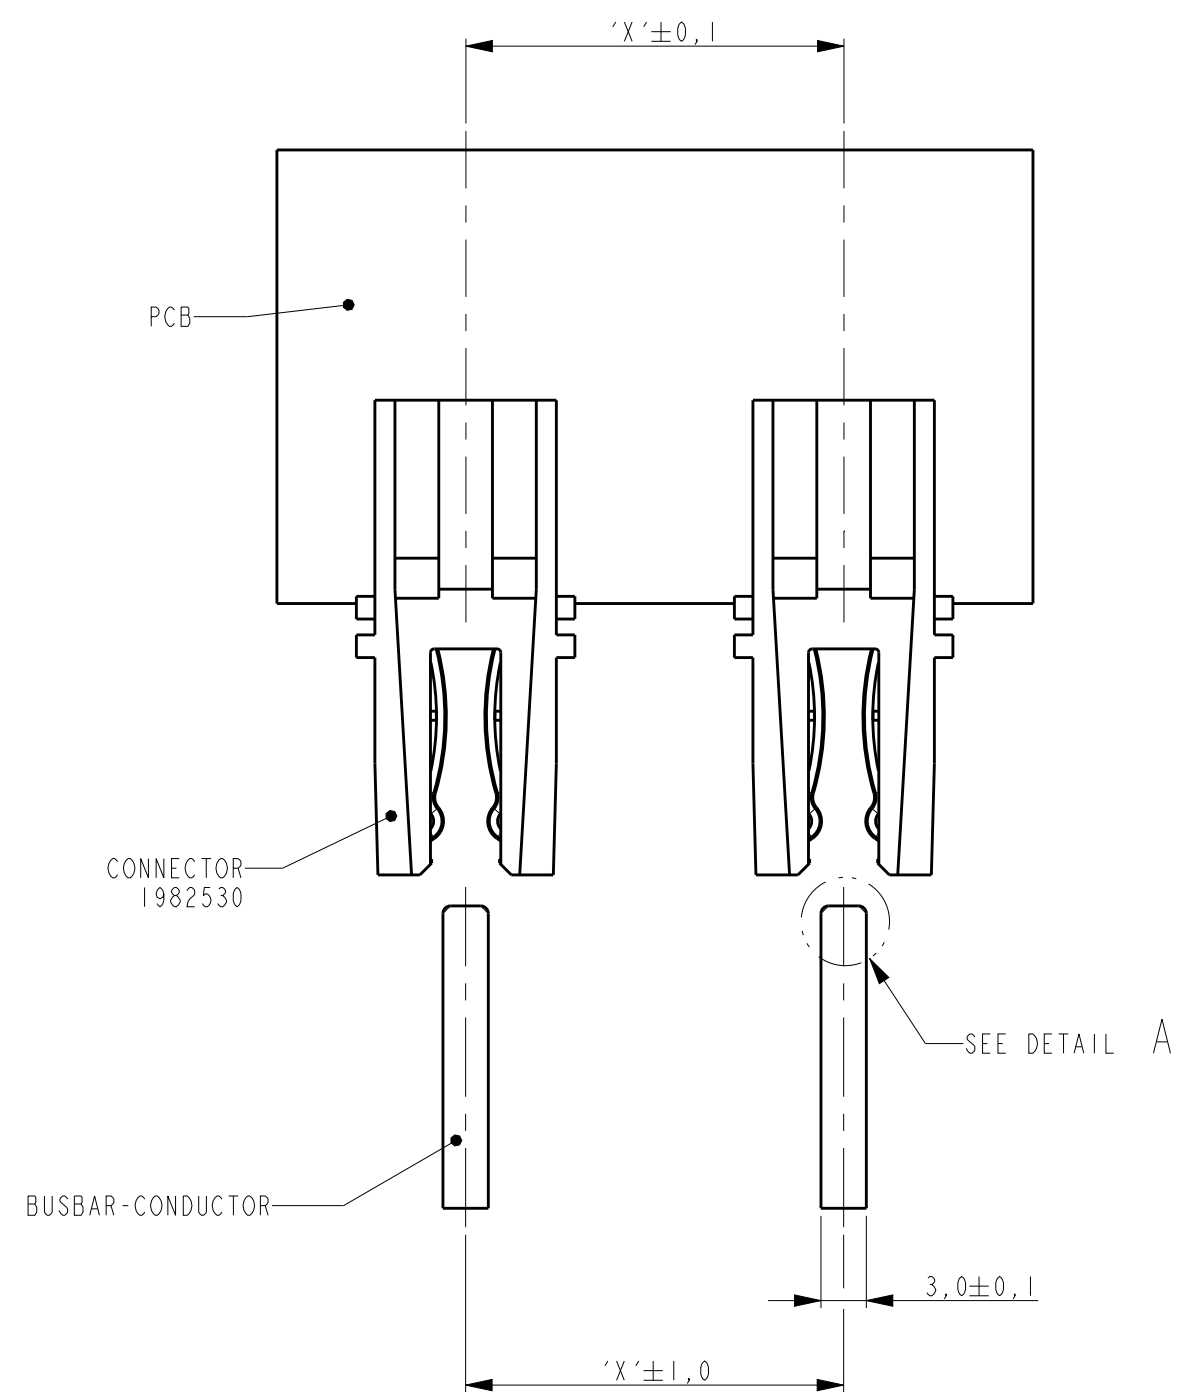





RECOMMENDED PCB LAY-OUT
THICKNESS: 4,8mm MAX

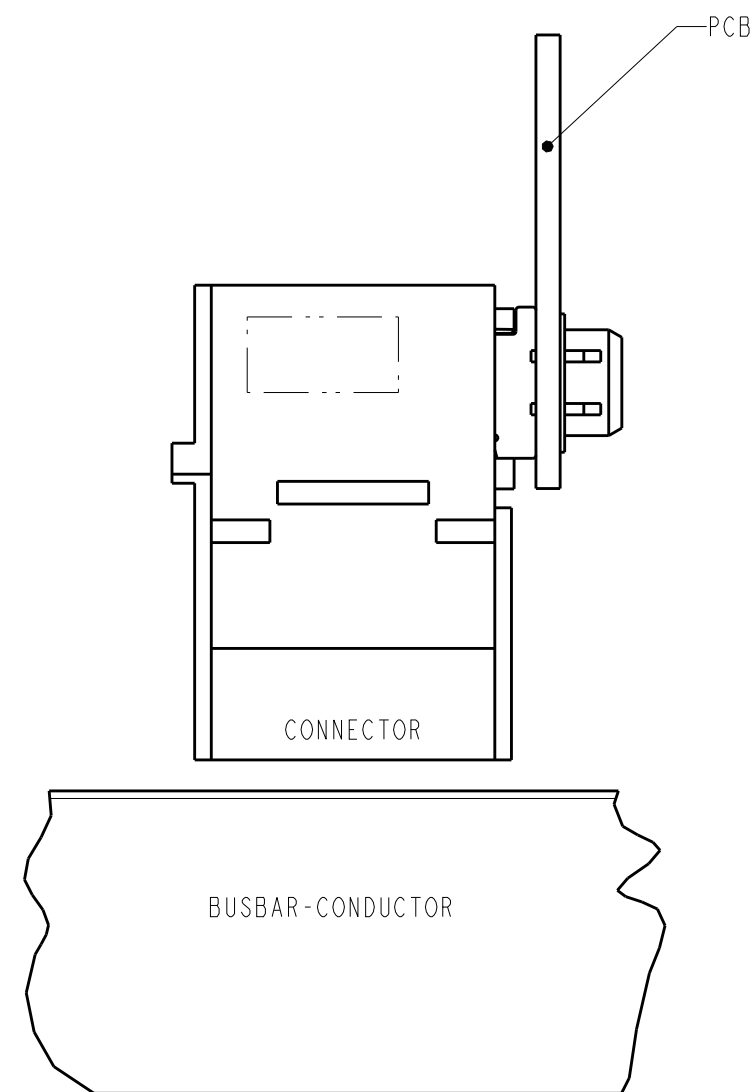

PCB AND BUSBAR-CONDUCTORS,
IN THESE VIEWS ARE SHOWN FOR REFERENCE ONLY.

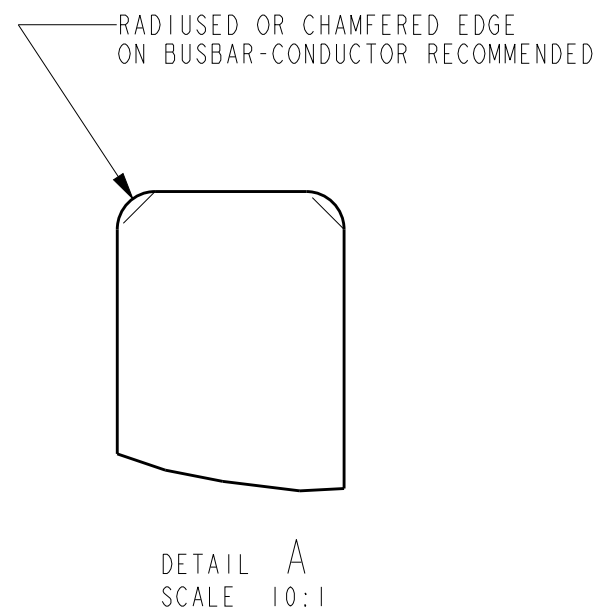

- NOTES:
- PCB MUST BE SUPPORTED WHILE INSERTING THE CONNECTOR IN THE SLOTS TO AVOID BENDING OF THE BOARD.
 - PLATING: SILVER PLATING OVER NICKEL UNDERLAID ON THE CONTACT.
 - MATERIAL:
POWER CONTACT: HIGH CONDUCTIVITY COPPER ALLOY
HOUSING: THERMOPLASTIC, BLACK, UL94 V-0
 - AREA FOR PART NUMBER AND DATE-CODE.

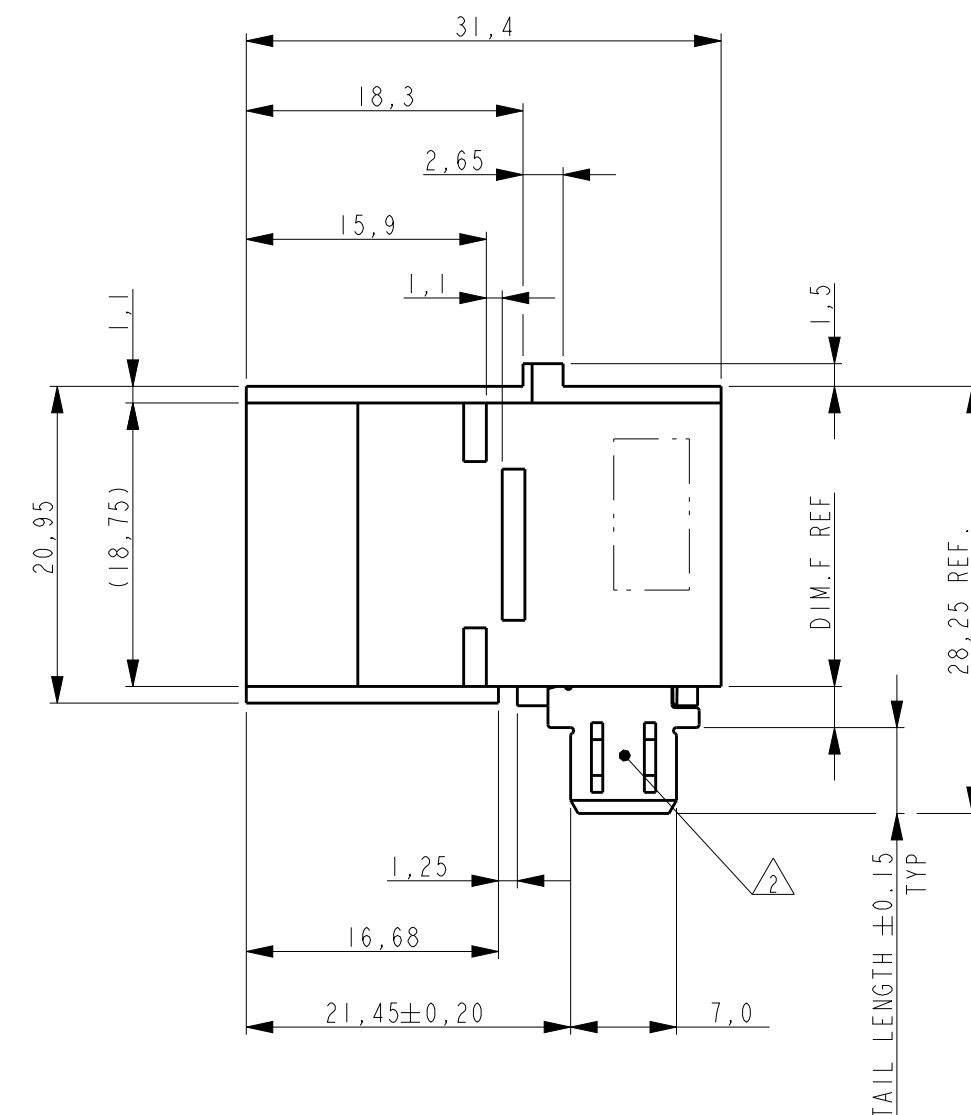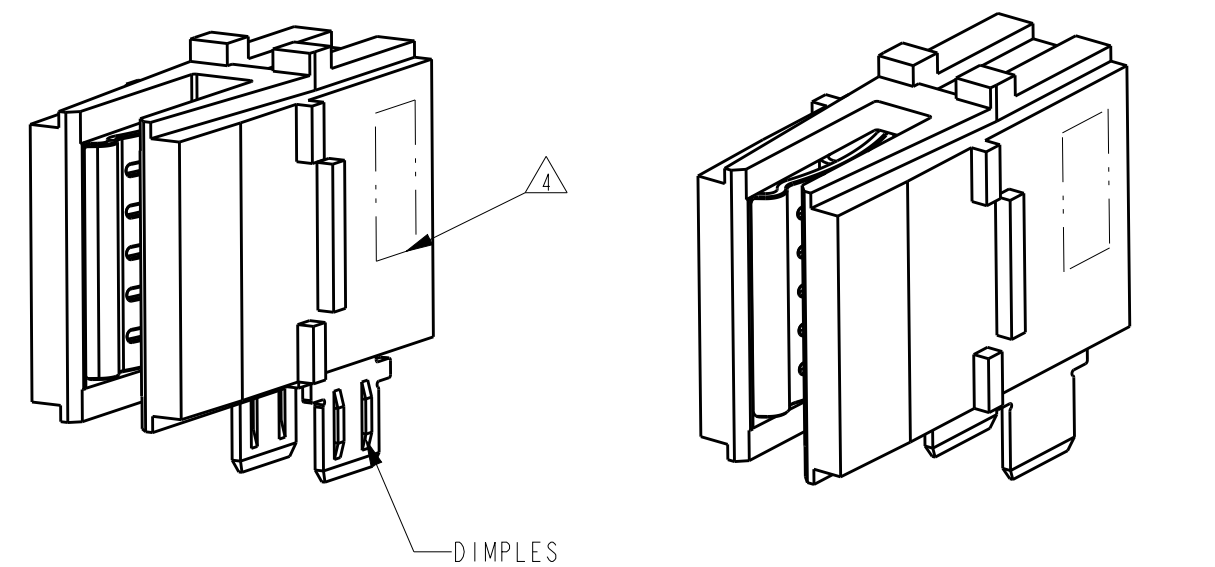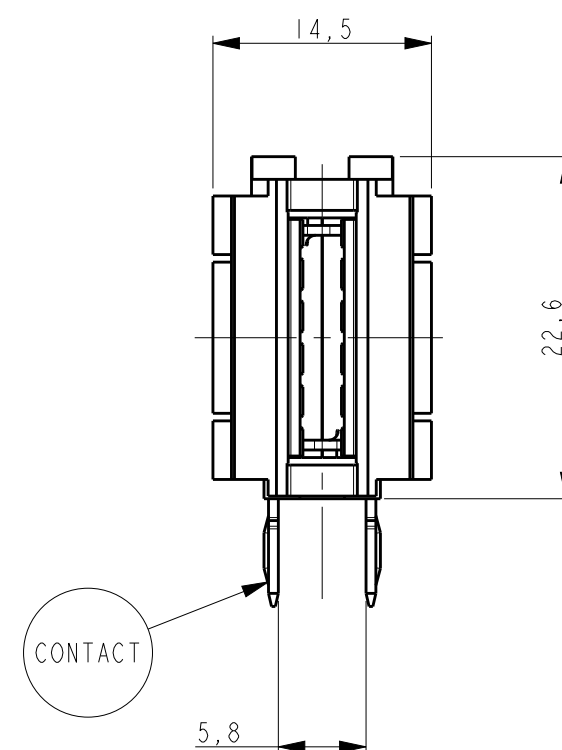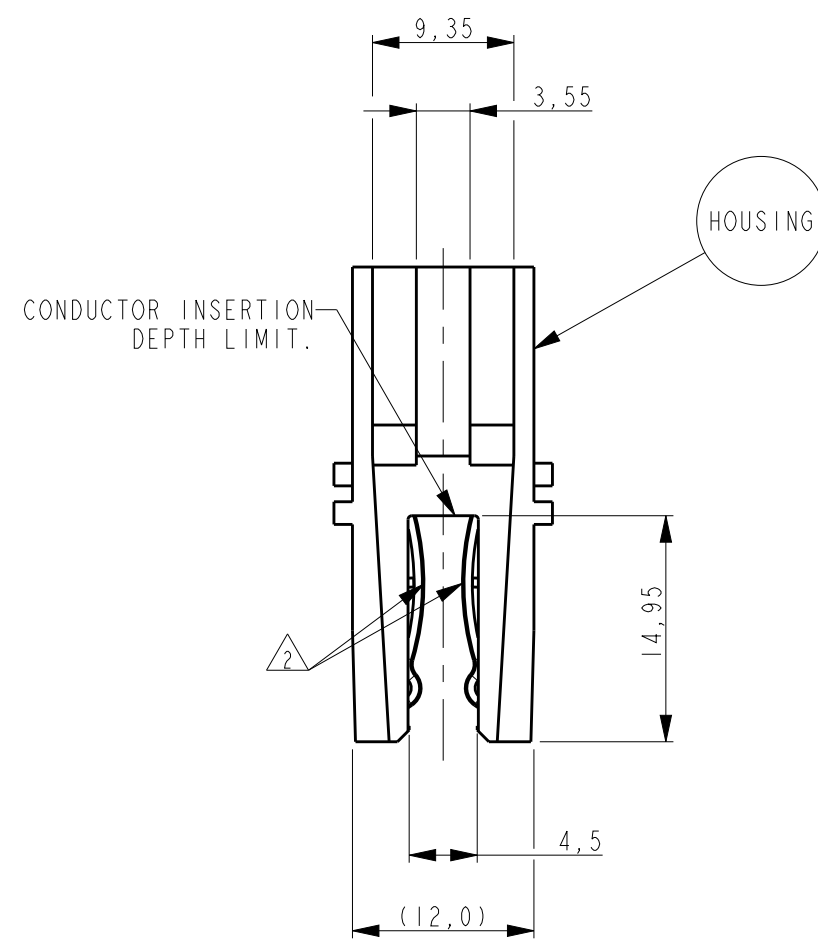

4.40	4.0	YES	CROWN CLIP JUNIOR BUS BAR	2178531-3	3
5.68	2.7	NO	CROWN CLIP JUNIOR BUS BAR	2178531-2	2
5.68	2.7	YES	CROWN CLIP JUNIOR BUS BAR	2178531-1	1
TAIL LENGTH		DIM F	DIMPLE FEATURE	MATERIAL	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN SUDHAKAR 24JAN13	TE Connectivity	
			CHK SUDHAKAR 24JAN13		
			APVD RAJENDRA 24JAN13	NAME	
			PRODUCT SPEC	PLUGGABLE BUSBAR CONNECTOR	
			APPLICATION SPEC	SOLDER VERSION	
			WEIGHT	CROWN CLIP JUNIOR	
			Customer Drawing	SIZE A2	RESTRICTED TO
			SCALE 2:1	CAGE CODE 00779	
			SHEET 1	DRAWING NO. C-2178531	
			OF 1	REV A4	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2178531-1](#)